



## DISC VALVE HYDRAULIC MOTORS

**TYPE MS**  
**MSY**  
**MT**  
**MV**



# DISC VALVE HYDRAULIC MOTORS

## CONTENTS

	Page
● Hydraulic Motors Series MS .....	4
● Hydraulic Motors Series MSY.....	24
● Hydraulic Motors Series MT .....	31
● Hydraulic Motors Series MV .....	43
● Motor Special Features.....	53
● Motors with Speed Sensor.....	54
● Motor Application .....	56

# DISC VALVE HYDRAULIC MOTORS

---

**DISC VALVE's** function is to distribute fluid to the Roller Gear Set. The pressure balanced sealing surface on the valve face and the separately driven maintains minimal leakage and mechanical losses. These gives the motors high efficiency- even at high pressures, and good starting characteristics.

**ROLLER GEAR SET** minimizes friction and thereby increases efficiency while providing smooth output shaft rotation.

**MS, MT and MV** are suitable for continuous operation under rough operating conditions- high pressures, thin oil, or frequent reversals. The Tapered roller bearings permit high radial loads.

---

**Standard Motor** The standard motor mounting flange is located as close to the output shaft as possible. This type of mounting supports the motor close to the shaft load. This mounting flange is also compatible with many standard gear boxes.

---

**Wheel Motor** The wheel motor mounting flange is located near the center of the motor which permits part or all of the motor to be located inside the wheel or roller hub. In traction drive applications, loads can be positioned over the motor bearings for best bearing life. This wheel motor mounting flange provides design flexibility in many applications.

---

**Short Motor** This motor is assembled without the output shaft, bearings and bearing housing and has the same drive components as the standard and wheel motors. The short motor is especially suited for applications such as gear boxes, winch, reel and roll drives. Short motor applications must be designed with a bearing supported internal spline to mate with the bearing less motor drive. Product designs using these hydraulic motors provide considerable cost savings.

---

**Low Leakage** **LL** Series hydraulic motors have been designed to operate at the whole standard range of working conditions (pressure drop and frequency of rotation), but with considerable decreased volumetric losses in the drainage ports. Their main purpose is to operate as series-connected motors in hydraulic systems. For this version is permissible decreasing of the maximal torque with up to 5% (at middle speed) and up to 10% (at high speed) in comparison to the standard versions of motors. This version is available for the EPMS motors.

---


**Low Speed Valve** **LSV** Series hydraulic motors have been designed to operate with normal pressure drop and to ensure smooth run at low speed (up to  $200 \text{ min}^{-1}$ ), as the best security for operation is guaranteed at frequency of rotation  $20 \div 50 \text{ min}^{-1}$ . They have an increased starting pressure drop and are not recommended for using at pressure less than 40 bar. This version is available for the EPMS motors.

# HYDRAULIC MOTORS MS



## APPLICATION

- » Conveyors
- » Metal working machine
- » Machines for agriculture
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles etc.

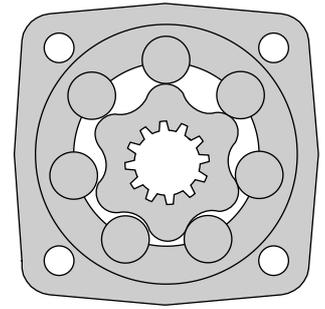

## CONTENTS

Specification data .....	5 ÷ 6
Function diagrams .....	7 ÷ 12
Dimensions and mounting .....	13 ÷ 14
Wheel motor .....	15
Motor with Drum brake- MSB .....	16
Shaft extensions .....	17
Permissible shaft loads .....	18
Function diagram for MSB .....	18
Permissible Shaft Seal pressure.....	19
Tacho connection .....	19
Dimensions and mounting- MSS, V, U .....	20 ÷ 22
Internal Spline data .....	22
Order code .....	23

## OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Motor with Drum Brake
- » Tacho connection
- » Speed sensing
- » Side and rear ports
- » Shafts- straight, splined and tapered
- » Metric and BSPP ports
- » Other special features


## GENERAL

Displacement, [cm <sup>3</sup> /rev.]	80,5 ÷ 564,9
Max. Speed, [RPM]	130 ÷ 810
Max. Torque, [daNm]	20 ÷ 58
Max. Output, [kW]	20 ÷ 6,9
Max. Pressure Drop, [bar]	100 ÷ 200
Max. Oil Flow, [l/min]	75
Min. Speed, [RPM]	5 ÷ 10
Permissible Shaft Loads, [daN]	P <sub>a</sub> = 500
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm <sup>2</sup> /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop (bar)	Viscosity (mm <sup>2</sup> /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

### Pressure Losses

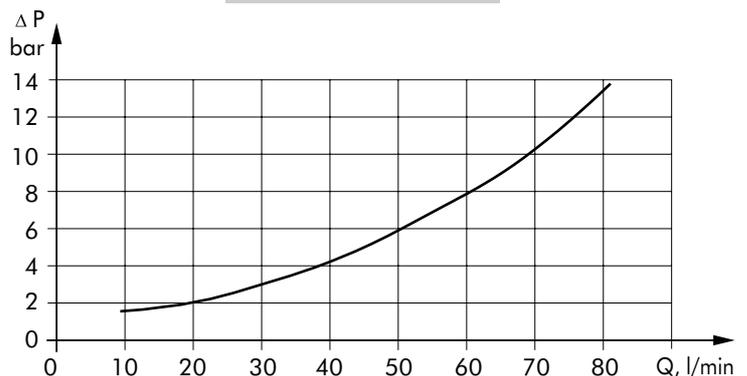

## SPECIFICATION DATA

Type	MS 80	MS 100	MS 125	MS 160	MS 200	
Displacement [cm <sup>3</sup> /rev.]	80,5	100	125,7	159,7	200	
Max. Speed, [RPM]	cont.	810	750	600	470	375
	Int.*	1000	900	720	560	450
Max. Torque [daNm]	cont.	20	29,2	37,4	46	46
	Int.*	24	32	41	51,5	60
	peak**	26	32	41	51,5	65
Max. Output [kW]	cont.	16,4	19,5	20	15,5	14
	int.*	22	26	24	21,9	21
Max. Pressure Drop [bar]	cont.	175	205	205	205	160
	Int.*	210	225	225	225	210
	peak**	225	225	225	225	225
Max. Oil Flow [l/min]	cont.	65	75	75	75	75
	Int.*	80	90	90	90	90
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210
	Int.*	250	250	250	250	250
	peak**	300	300	300	300	300
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140
	Int.*	175	175	175	175	175
	peak**	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]	12	10	10	8	8	
Min. Starting Torque [daNm]	at max. press. drop cont.	16,5	23,9	26	36,9	37,5
	at max. press. drop Int.*	19,4	26,4	31	40,5	48,5
Min. Speed***, [RPM]	10	10	8	8	6	
Weight, [kg]  For Rear Ports +0,4 kg	MS(F)	9,9	10,1	10,4	10,8	11,2
	MSW	10,4	10,6	10,9	11,3	11,7
	MSS(Z)	7,9	8,1	8,4	8,8	9,2
	MSV	5,8	6	6,3	6,7	7,1
	MSQ	10,3	10,5	10,8	11,2	11,6
	MSB	16,9	17,1	17,4	17,8	18,2

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.

\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.

- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm<sup>2</sup>/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

### SPECIFICATION DATA (continued)

Type	MS 250	MS 315	MS 400	MS 475	MS 525	MS 565	
Displacement [cm <sup>3</sup> /rev.]	250	314,9	397	474,6	522,7	564,9	
Max. Speed, [RPM]	cont.	300	240	190	160	145	130
	Int.*	360	290	230	190	175	160
Max. Torque [daNm]	cont.	50	54	58	58	58	58
	Int.*	63	63	69	68	69	69
	peak**	72	84	85	84	85	85
Max. Output [kW]	cont.	13,5	11,5	10	8,4	7,6	6,9
	int.*	21	13,5	13	11,3	10,4	9,6
Max. Pressure Drop [bar]	cont.	140	120	100	85	80	75
	Int.*	175	140	120	100	90	85
	peak**	200	185	140	115	105	100
Max. Oil Flow [l/min]	cont.	75	75	75	75	75	75
	Int.*	90	90	90	90	90	90
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210	210
	Int.*	250	250	250	250	250	250
	peak**	300	300	300	300	300	300
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140	140
	Int.*	175	175	175	175	175	175
	peak**	210	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]	8	8	8	8	8	8	
Min. Starting Torque [daNm]	at max. press. drop cont.	40	51	54	47	47	47
	at max. press. drop Int.*	50	65	63	55	55	55
Min. Speed***, [RPM]	6	5	5	5	5	5	
Weight, [kg]  For Rear Ports + 0,4 kg	MS(F)	11,7	12,4	13,3	14,4	14,6	15
	MSW	12,2	12,9	13,8	14,6	15,1	15,5
	MSS(Z)	9,7	10,4	11,3	12,1	12,6	13
	MSV	7,6	8,3	9,2	10	10,5	10,9
	MSQ	12,1	12,8	13,7	14,5	15,0	15,4
	MSB	18,7	19,4	20,3	21,1	21,6	23

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm<sup>2</sup>/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**MS 80**

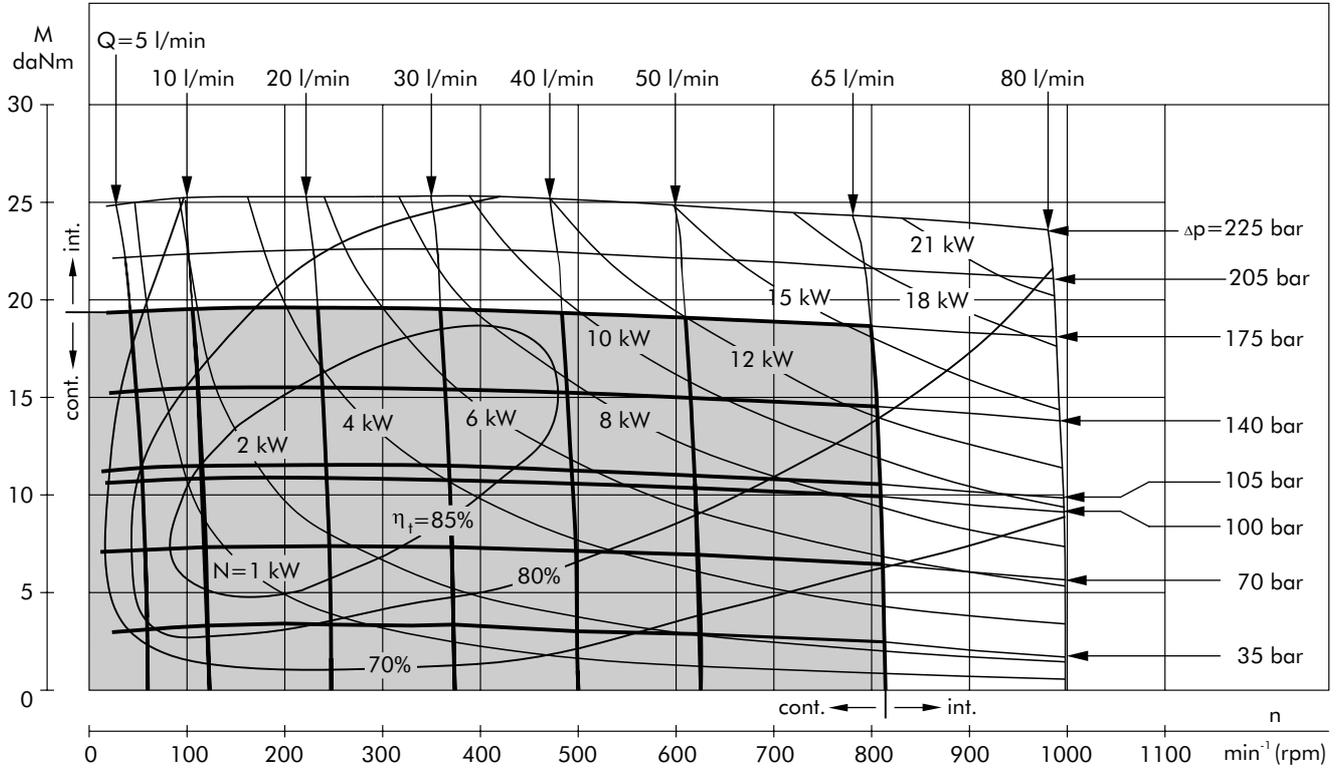


**MS 100**

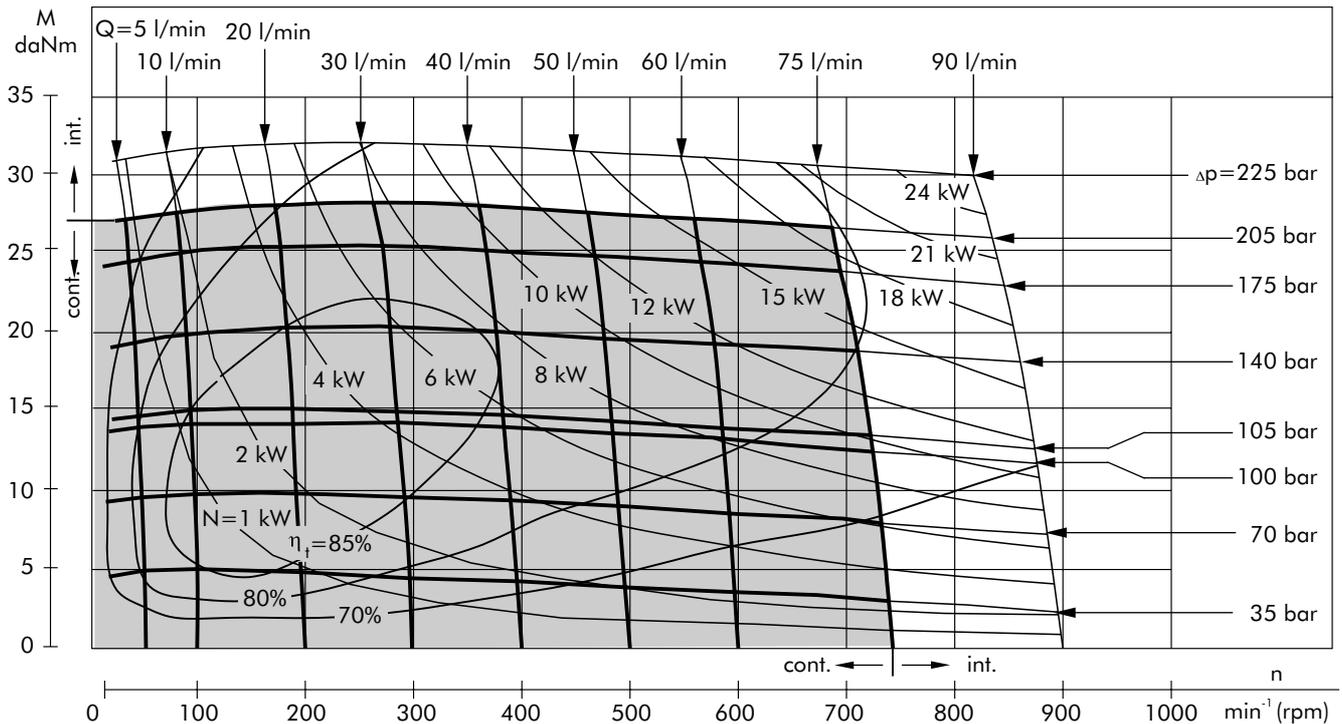


The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.

**FUNCTION DIAGRAMS**

**MS 125**

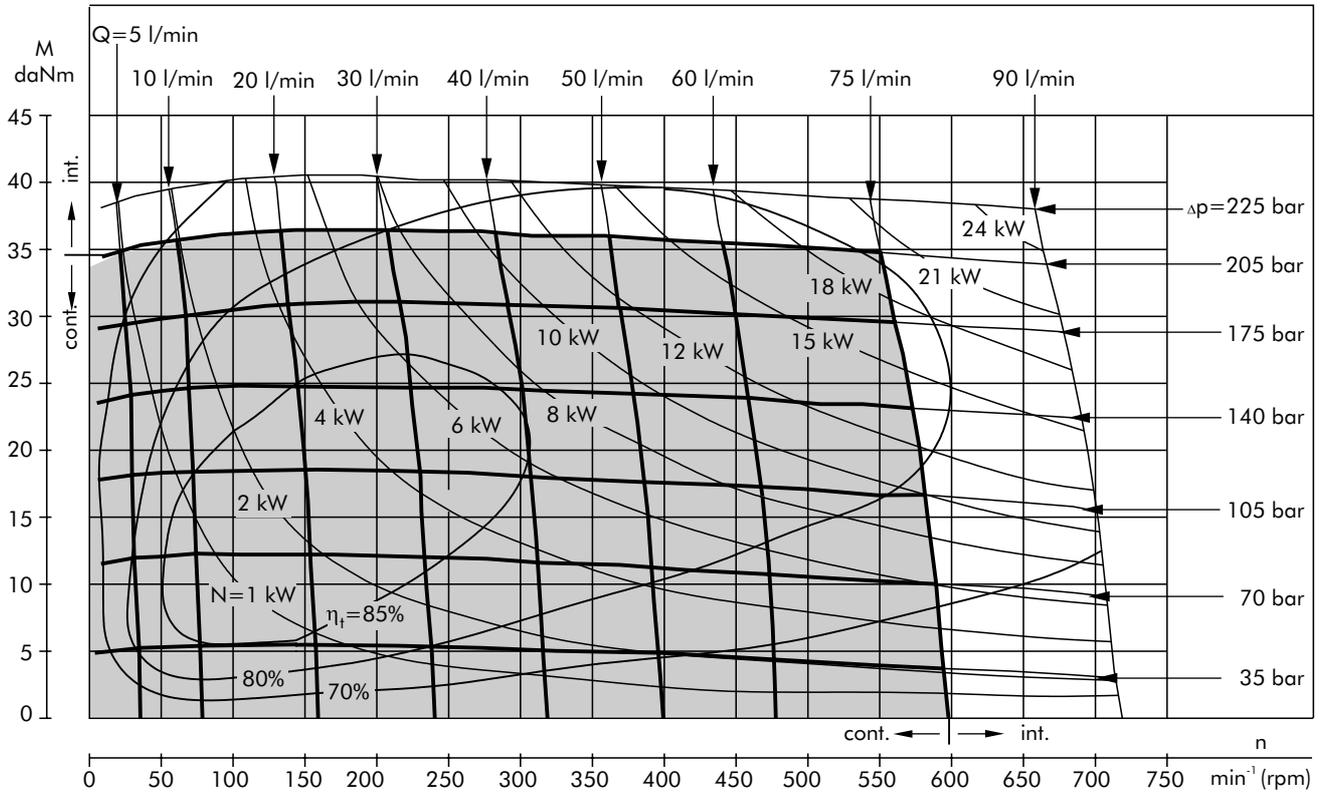


**MS 160**

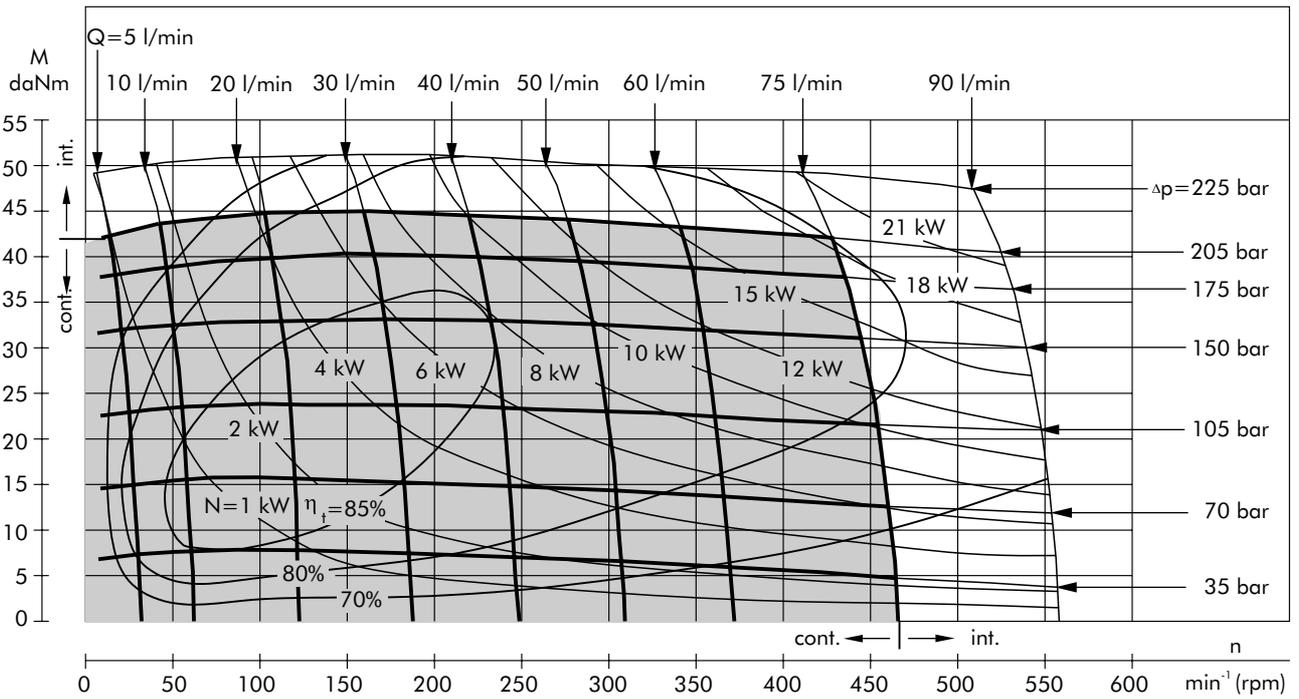


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .

**FUNCTION DIAGRAMS**

**MS 200**

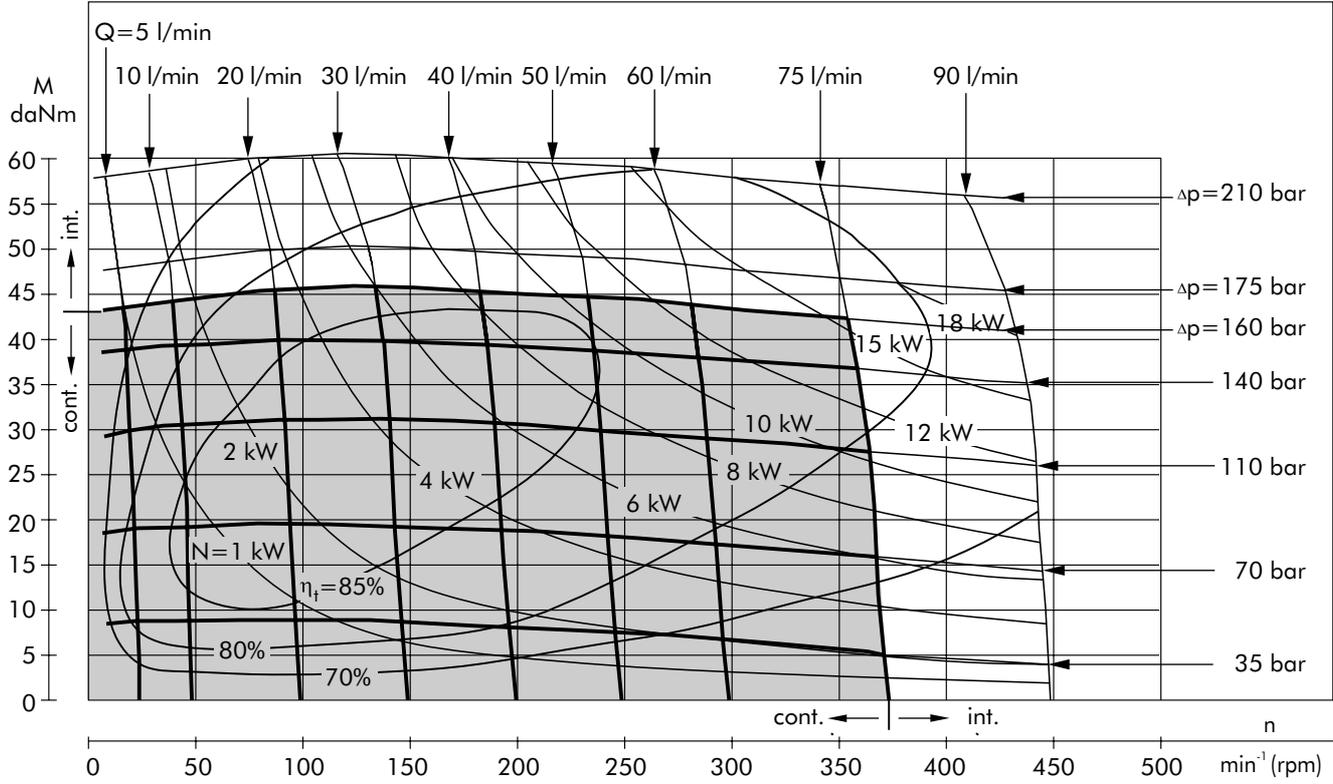


**MS 250**

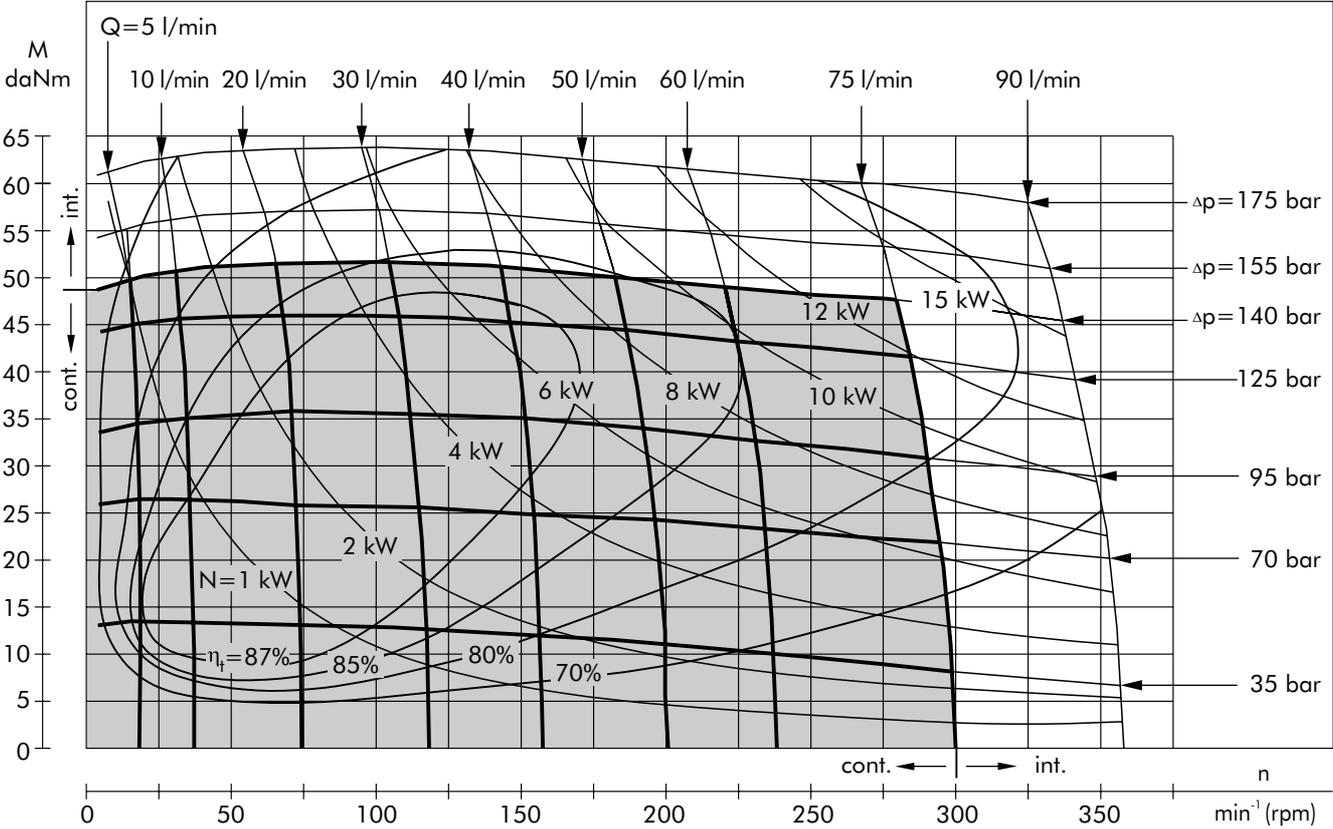


The function diagrams data was collected at back pressure 5÷10 bar and oil with viscosity of 32  $\text{mm}^2/\text{s}$  at 50° C.

**MS 315**

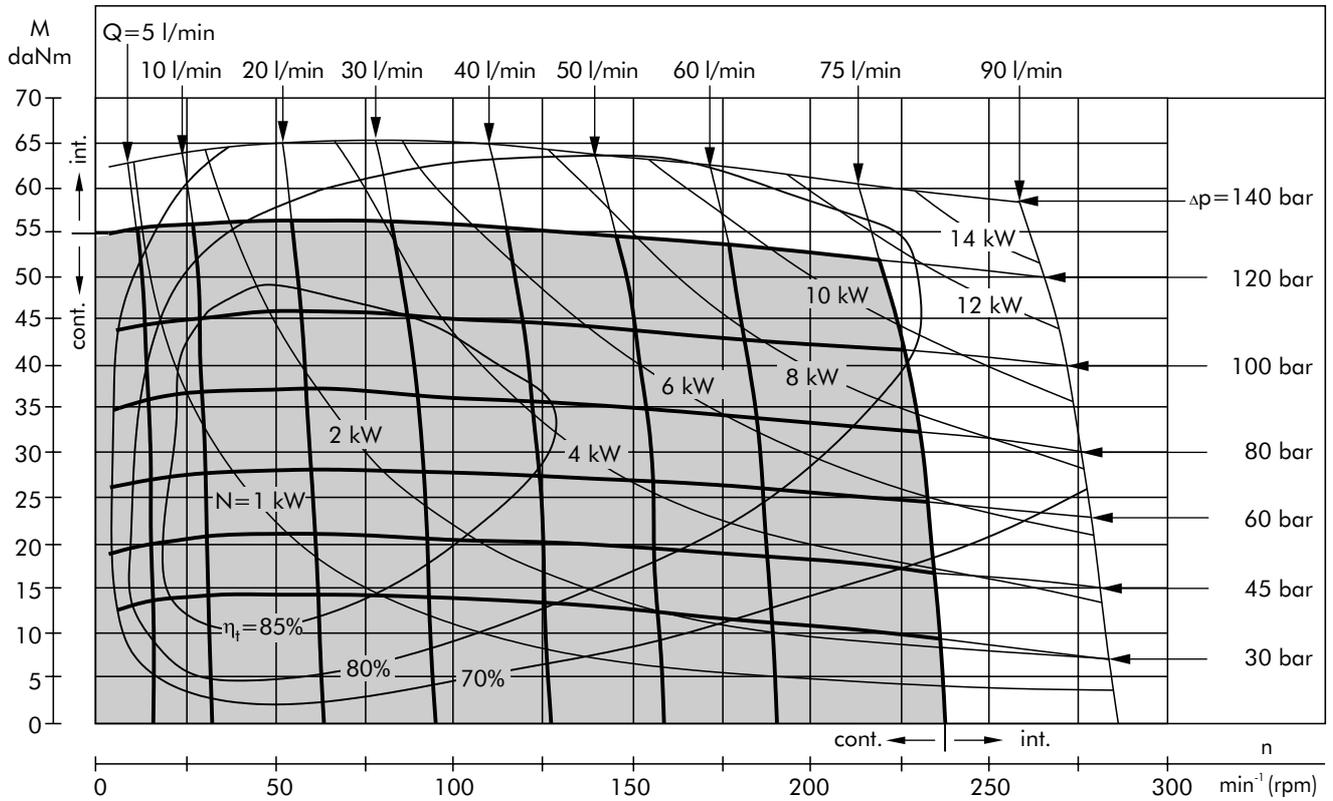


**MS 400**

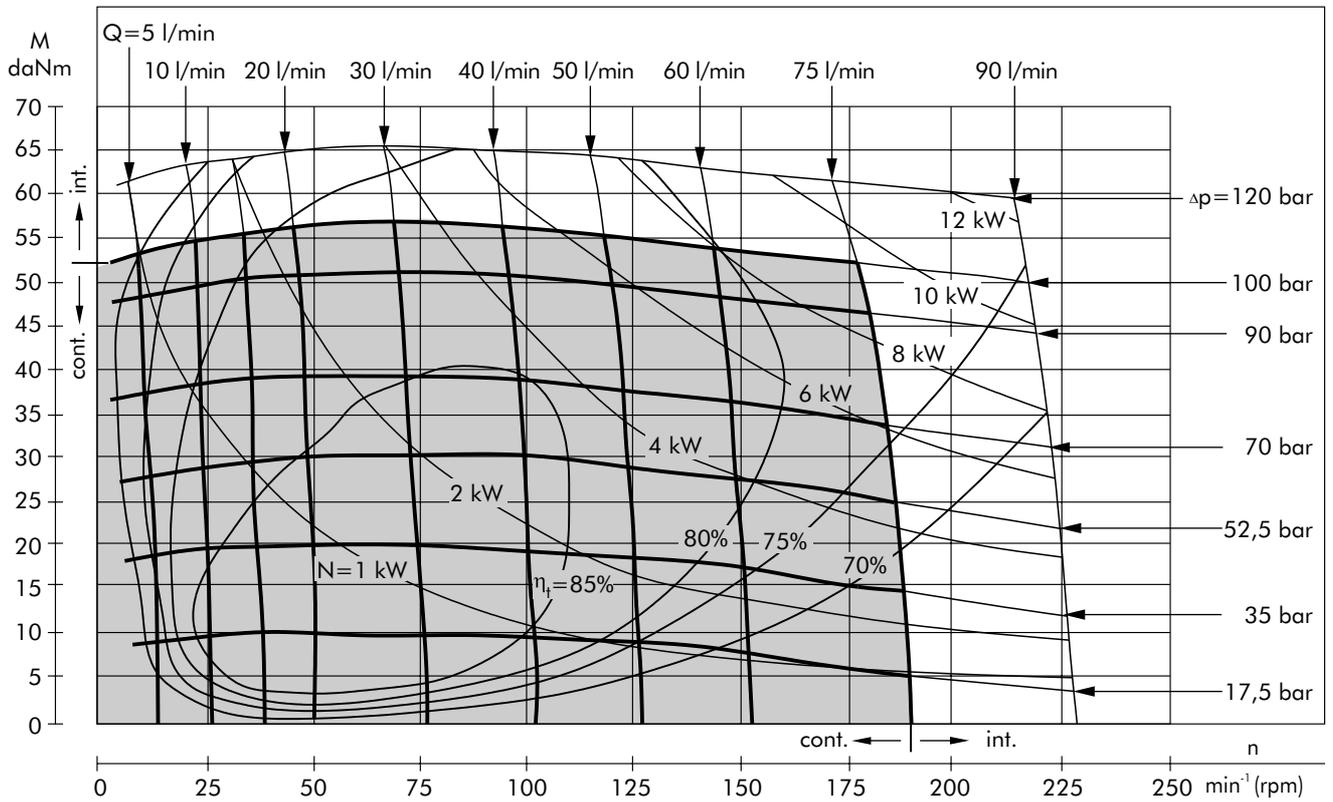


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .

**MS 475**

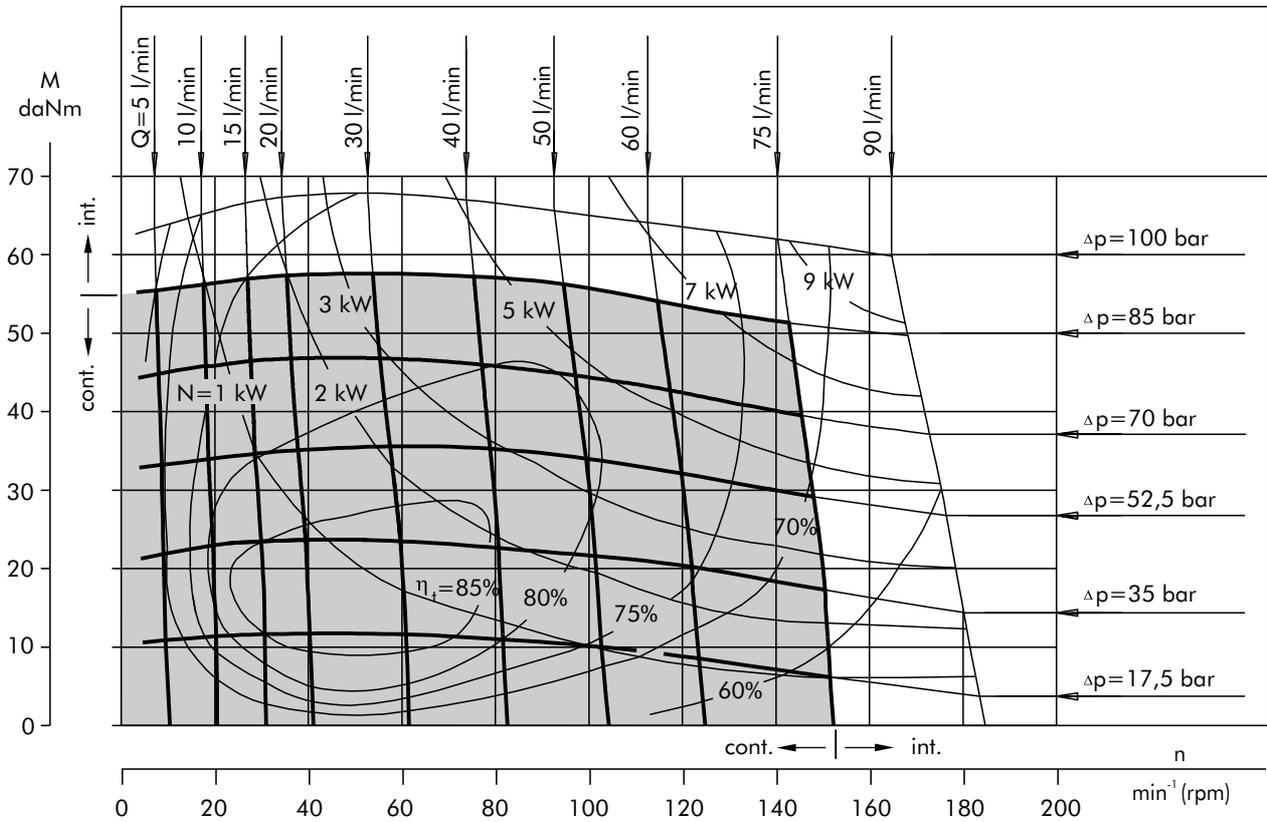


**MS 525**

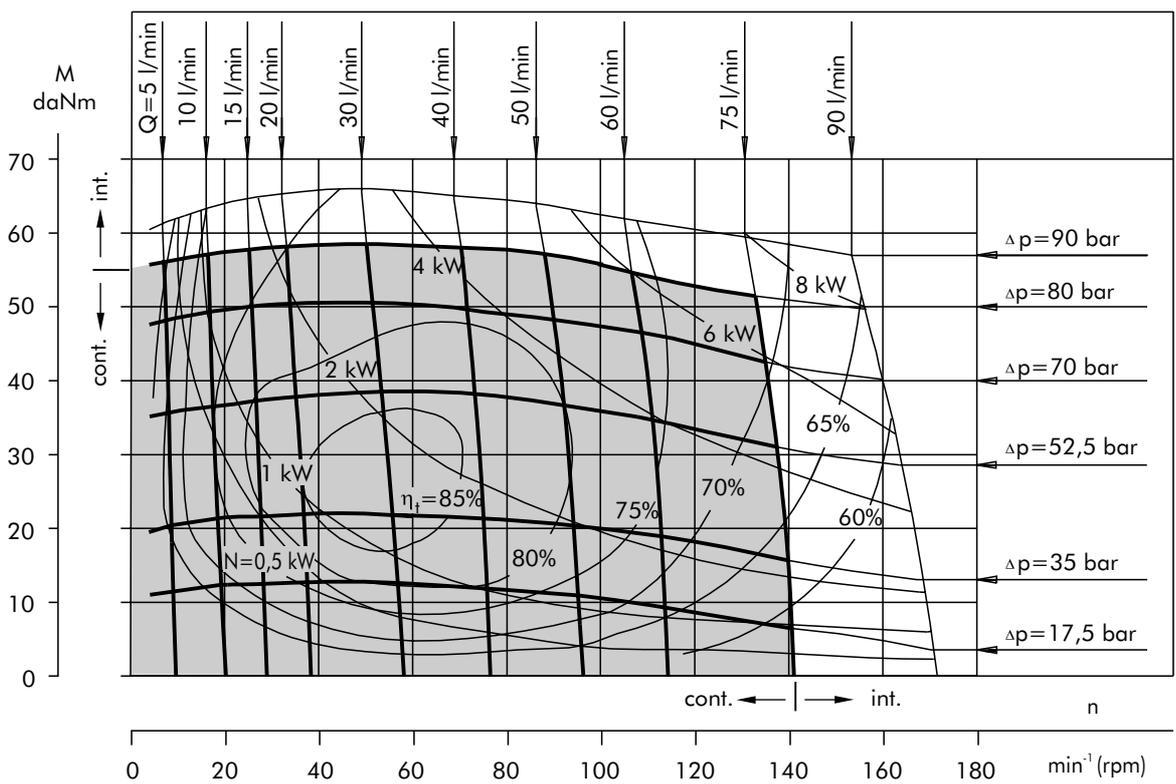

The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.


**FUNCTION DIAGRAMS**

**MS 565**

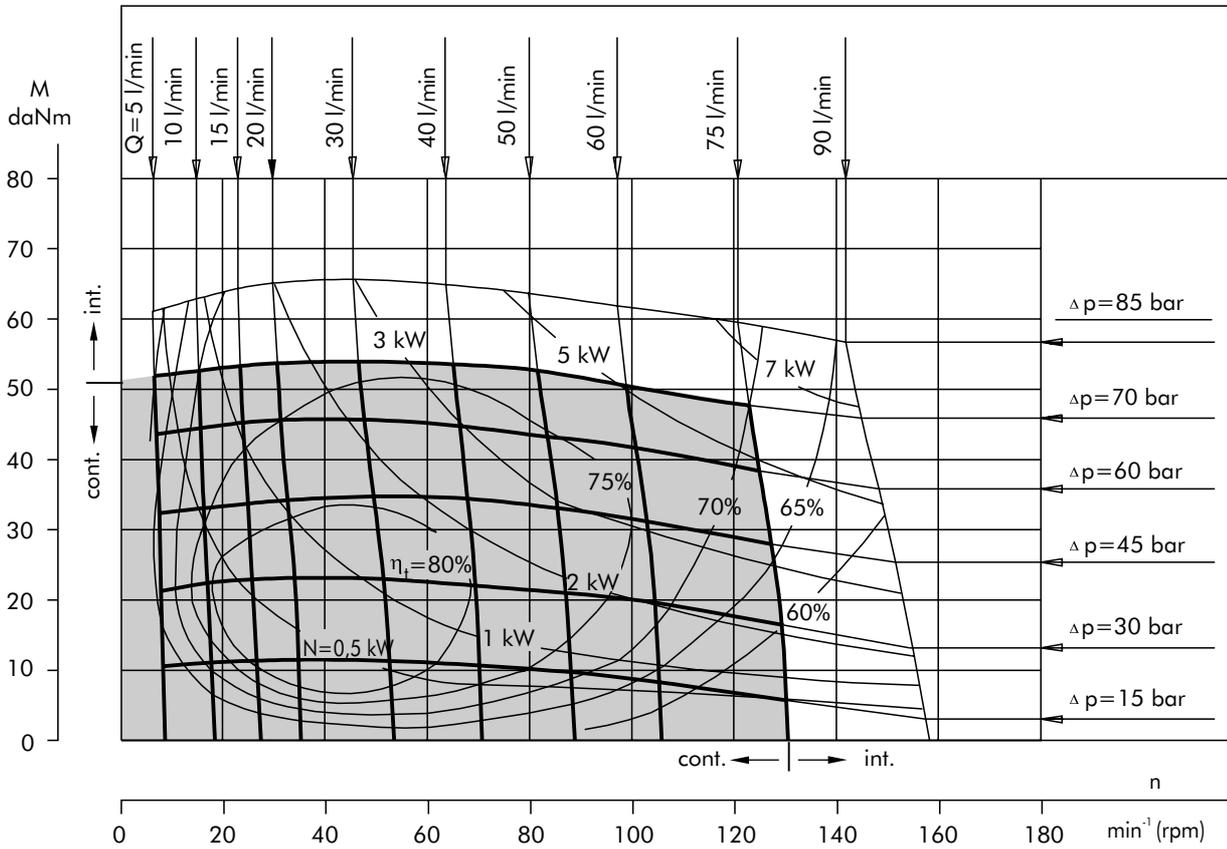


The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.

**DIMENSIONS AND MOUNTING DATA**

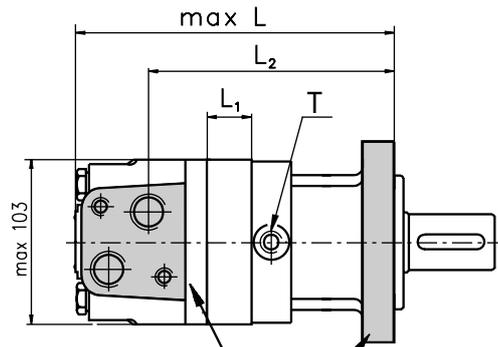


**Porting**

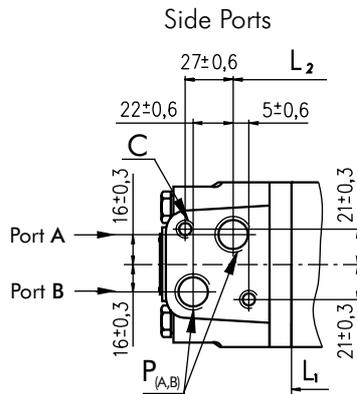


**Mounting**


**SAE A-4 Mount (4 Holes)**

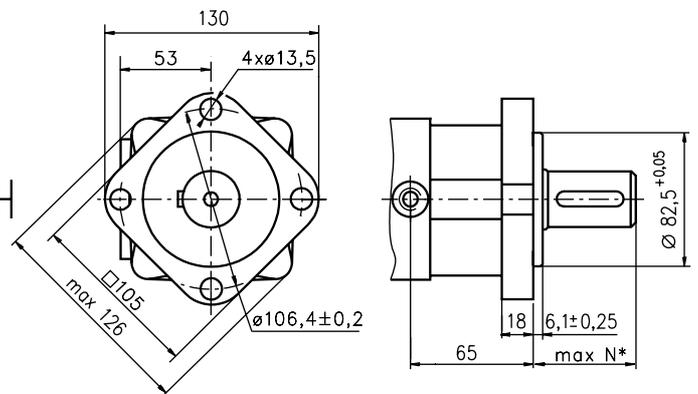

**E Rear Ports**

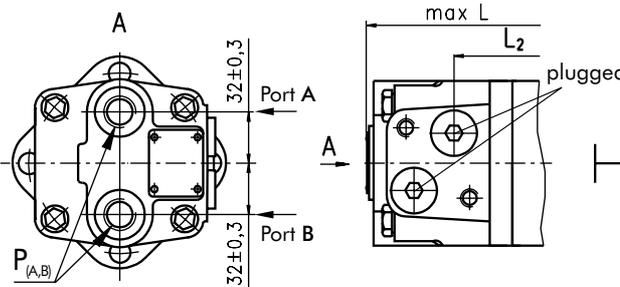

**A SAE A-2 Mount (2 Holes)**

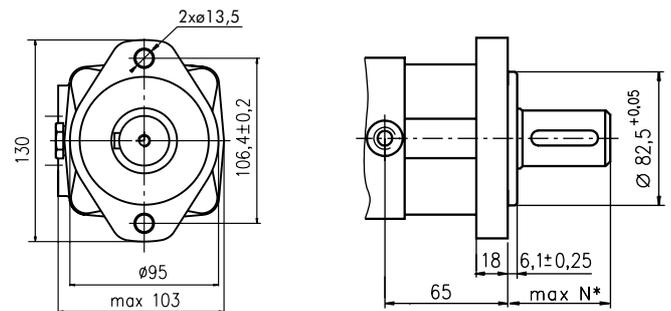

\*For N see page 17


- C:** 2xM10-12 mm depth
- P<sub>(A,B)</sub>:** 2xG1/2 or 2xM22x1,5-15 mm depth
- T:** G 1/4 or M14x1,5- 12 mm depth (plugged)

**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW

**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	L <sub>1</sub> , mm
MS(A) 80	168	124	MS(A)E 80	173	14
MS(A) 100	171	129	MS(A)E 100	177	17,4
MS(A) 125	176	132	MS(A)E 125	181	21,8
MS(A) 160	182	138	MS(A)E 160	187	27,8
MS(A) 200	189	145	MS(A)E 200	194	34,8
MS(A) 250	197	154	MS(A)E 250	203	43,5
MS(A) 315	209	165	MS(A)E 315	214	54,8
MS(A) 400	223	179	MS(A)E 400	228	69,4
MS(A) 475	237	193	MS(A)E 475	242	82,6
MS(A) 525	229	185	MS(A)E 525	234	74,5
MS(A) 565	235	191	MS(A)E 565	240	80,2

**DIMENSIONS AND MOUNTING DATA**

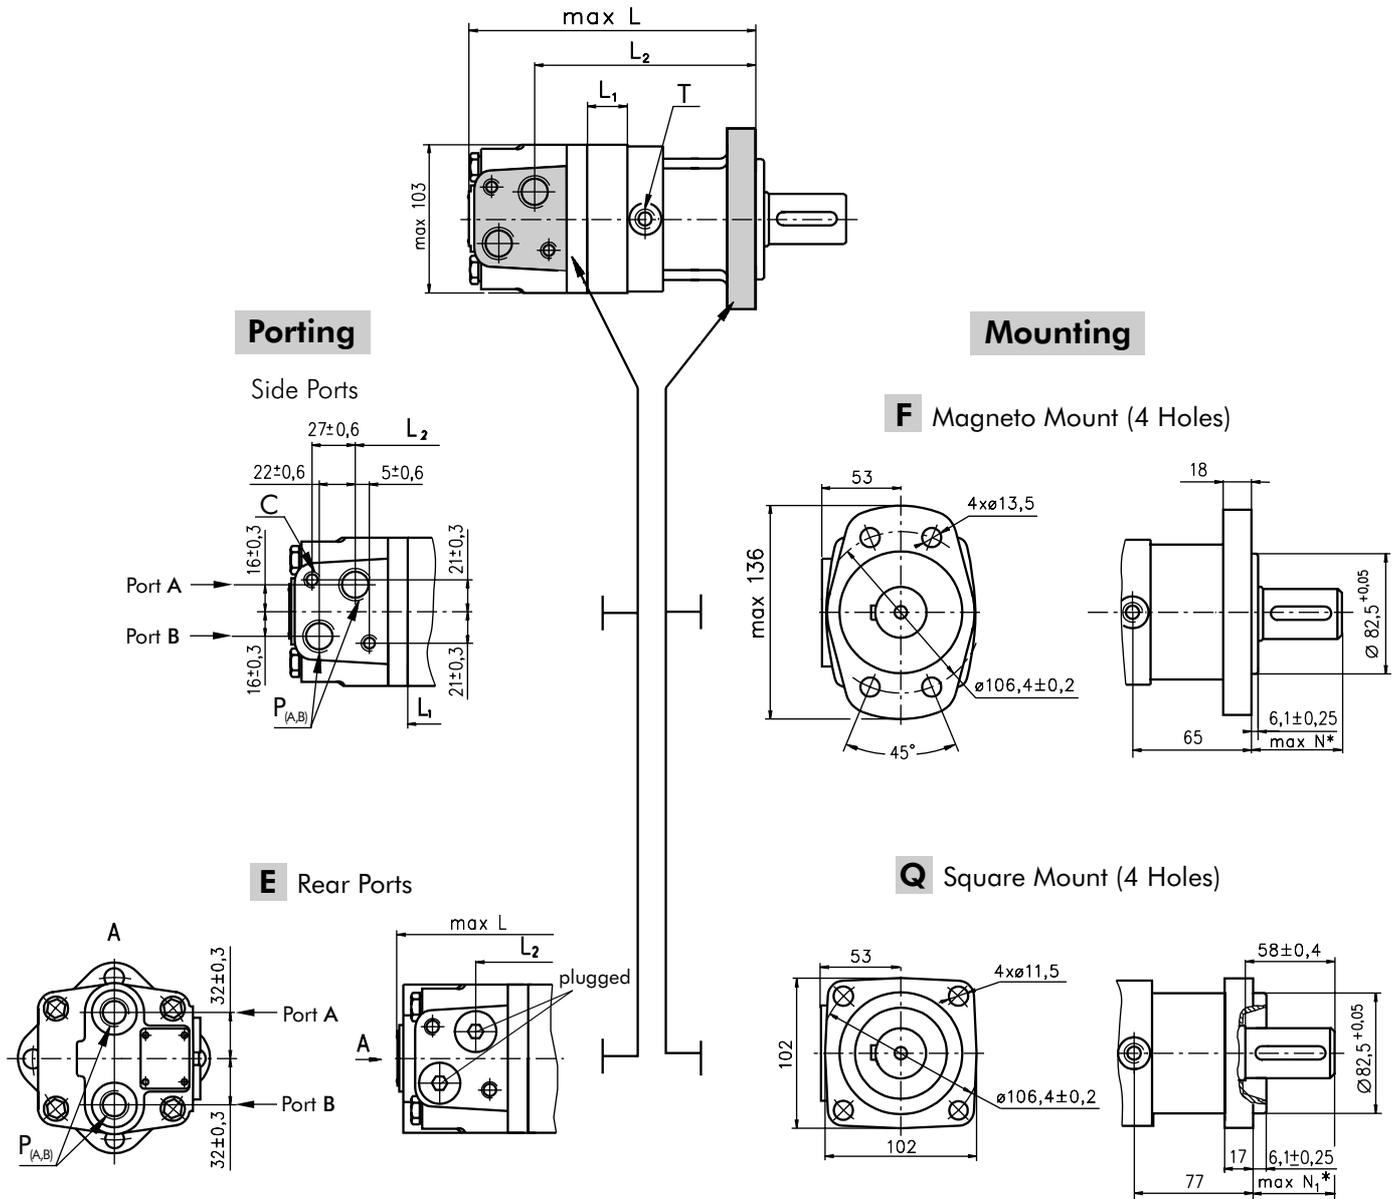

**C:** 2xM10-12 mm depth  
**P<sub>(A,B)</sub>:** 2xG1/2 or 2xM22x1,5-15 mm depth  
**T:** G ¼ or M14x1,5- 12 mm depth (plugged)

**Standard Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CW  
 Port B Pressurized - CCW



**Reverse Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CCW  
 Port B Pressurized - CW

\*For **N** and **N<sub>1</sub>**, see page 17


Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	Type	L, mm	L <sub>1</sub> , mm
MSF 80	168	124	MSQ 80	179	136	MSFE 80	173	MSQE 80	185	14
MSF 100	171	129	MSQ 100	183	140	MSFE 100	177	MSQE 100	189	17,4
MSF 125	176	132	MSQ 125	187	144	MSFE 125	181	MSQE 125	193	21,8
MSF 160	182	138	MSQ 160	193	150	MSFE 160	187	MSQE 160	199	27,8
MSF 200	189	145	MSQ 200	200	157	MSFE 200	194	MSQE 200	206	34,8
MSF 250	197	154	MSQ 250	209	166	MSFE 250	203	MSQE 250	215	43,5
MSF 315	209	165	MSQ 315	220	177	MSFE 315	214	MSQE 315	226	54,8
MSF 400	223	179	MSQ 400	235	192	MSFE 400	228	MSQE 400	241	69,4
MSF 475	237	193	MSQ 475	247	205	MSFE 475	242	MSQE 475	254	82,6
MSF 525	229	185	MSQ 525	240	197	MSFE 525	234	MSQE 525	246	74,5
MSF 565	235	191	MSQ 565	246	203	MSFE 565	240	MSQE 565	252	80,2

**DIMENSIONS AND MOUNTING DATA -MSW**

**W Wheel Mount**

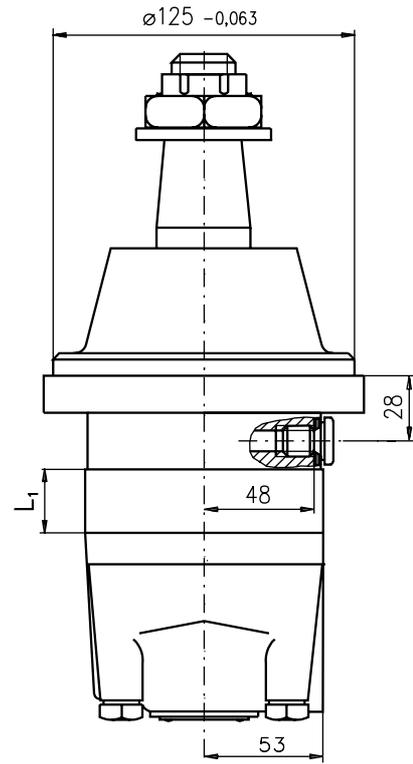
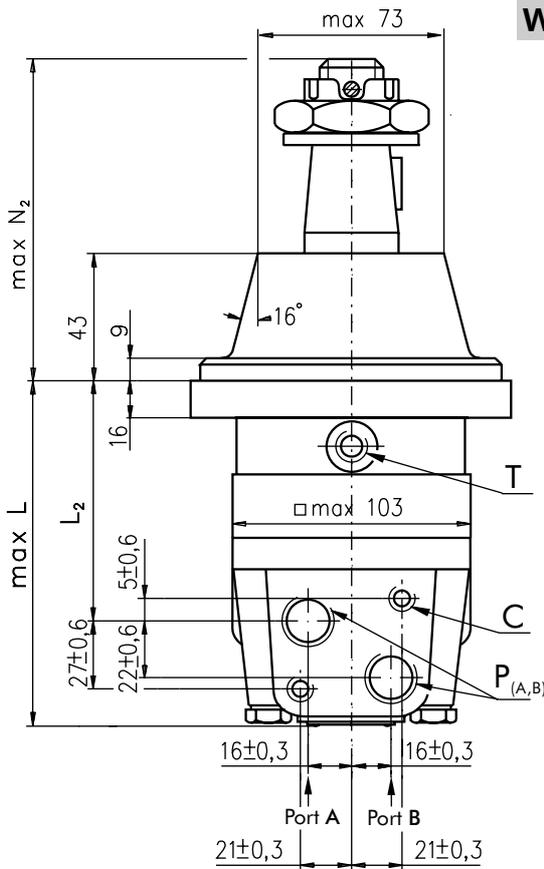


**C:** 2xM10-12 mm depth  
**P<sub>(A,B)</sub>:** 2xG1/2 or 2xM22x1,5-15 mm depth  
**T:** G 1/4 or M14x1,5 - 12 mm depth(plugged)

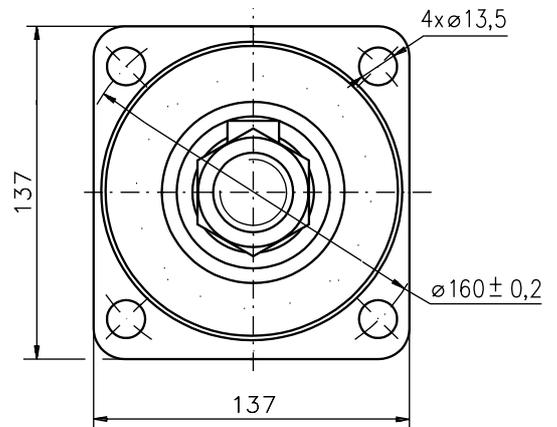

\*For N<sub>2</sub> see page 17

**E Rear Port**

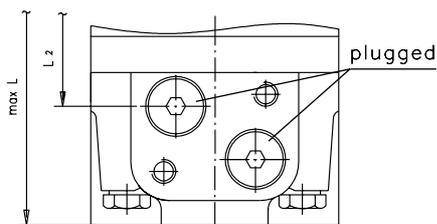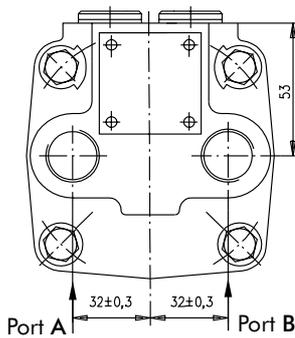


**Standard Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CW  
 Port B Pressurized - CCW

**Reverse Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CCW  
 Port B Pressurized - CW




Type	L <sub>1</sub> , mm	L <sub>1</sub> , mm	L <sub>2</sub> , mm	Type	L, mm
MSW 80	129	14	87	MSWE 80	138
MSW100	133	17,4	91	MSWE 100	142
MSW 125	137	21,8	95	MSWE 125	146
MSW 160	143	27,8	101	MSWE 160	152
MSW 200	150	34,8	108	MSWE 200	159
MSW 250	159	43,5	117	MSWE 250	168
MSW 315	170	54,8	128	MSWE 315	179
MSW 400	184	69,4	143	MSWE 400	194
MSW 475	198	82,6	156	MSWE 475	207
MSW 525	190	74,5	148	MSWE 525	199
MSW 565	196	80,2	154	MSWE 565	205

**B Motor with Drum Brake**




Actuating the brake level, the brake shaft is turned. The rectangular shape of the inner part of this shaft forces the brake pads to be pressed against the brake drum. This brakes the wheel or the winch drum.

Releasing the level, the springs pull it and the brake pads back to the initial position. The motor output shaft is released. Minimum angle adjustment is 10°. It can be adjusted by dismounting the level. Depending on the application You can choose the actuating direction of the brake level. The rod connection actuating the brake should be capable of moving at last 25 mm from neutral to extreme position.

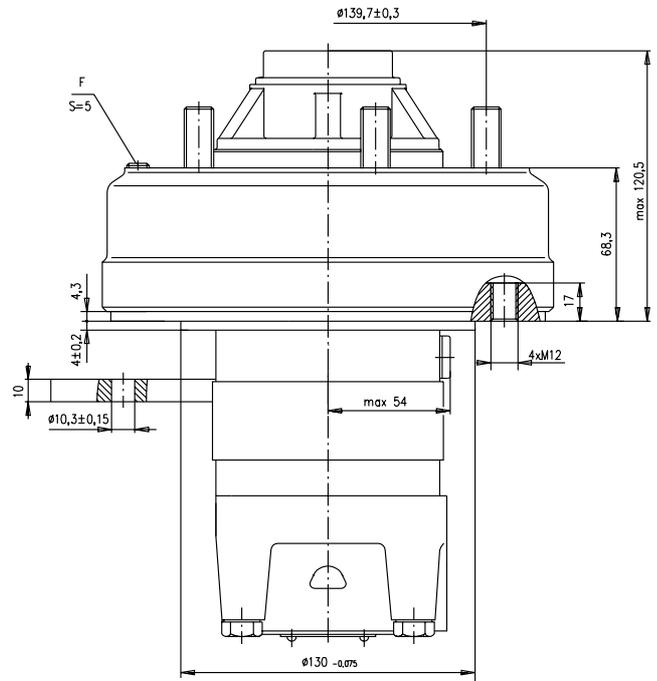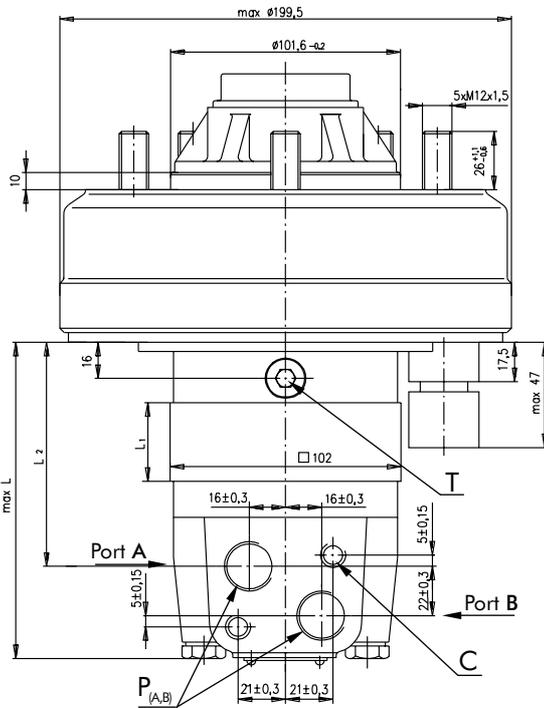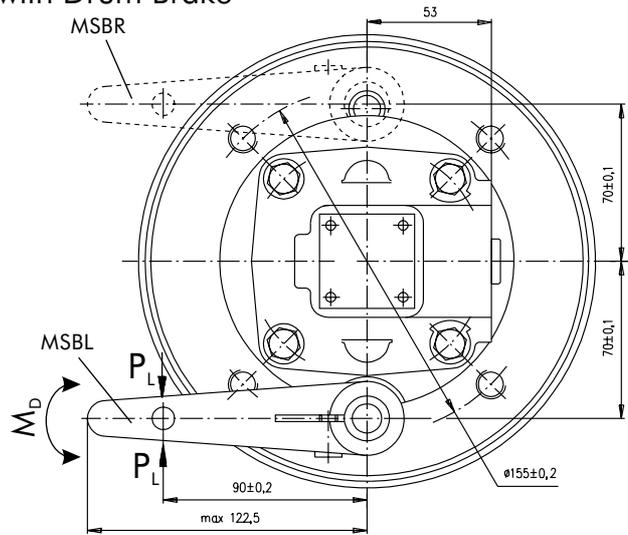

- C:** 2xM10-12 mm depth
- F:** Inspection hole for checking brake lining
- T:** G 1/4 or M14x1,5 - 12 mm depth (plugged)
- P<sub>(A,B)</sub>:** 2xG1/2 or 2xM22x1,5-15 mm depth

**E Rear Port**

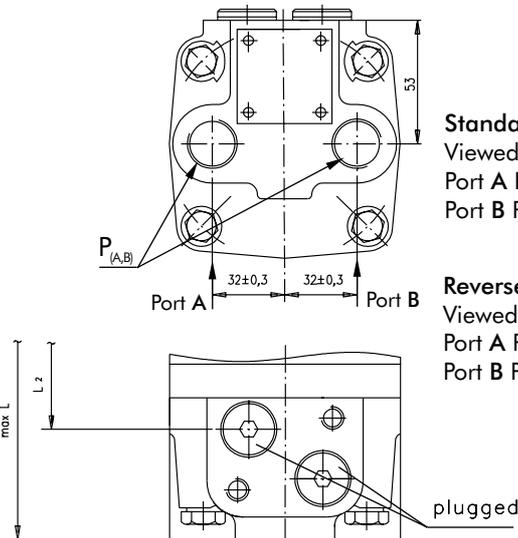


**Standard Rotation**  
Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW

**Reverse Rotation**  
Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW


Type	L, mm	L <sub>1</sub> , mm	L <sub>2</sub> , mm	Type	L, mm
MSB 80	119	14	74	MSBE 80	127
MSB100	122	17,4	77	MSBE 100	130
MSB 125	126	21,8	82	MSBE 125	134
MSB 160	132	27,8	88	MSBE 160	140
MSB 200	139	34,8	95	MSBE 200	147
MSB 250	148	43,5	110	MSBE 250	156
MSB 315	159	54,8	115	MSBE 315	167
MSB 400	174	69,4	130	MSBE 400	182
MSB 475	188	82,6	143	MSBE 475	196
MSB 525	180	74,5	135	MSBE 525	188
MSB 565	186	80,2	141	MSBE 565	192

**SHAFT EXTENSIONS**


**C** -  $\varnothing 32$  straight, Parallel key A10x8x45 DIN 6885  
Max. Torque 77 daNm

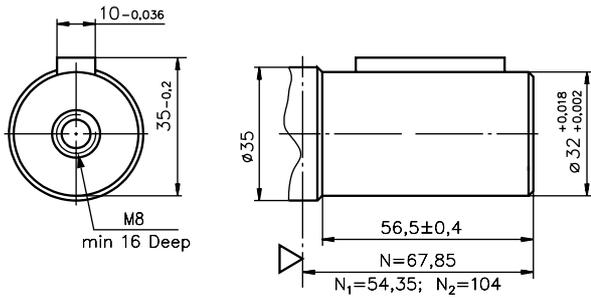


**K** - tapered 1:10, Parallel key B6x6x20 DIN 6885  
Max. Torque 95 daNm

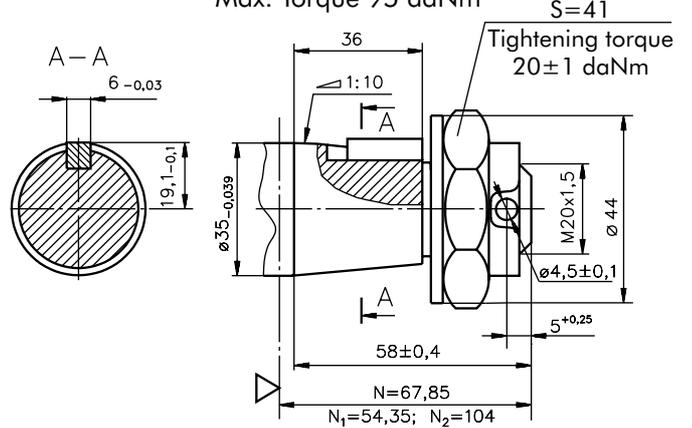


**CO** -  $\varnothing 1\frac{1}{4}$ " straight, Parallel key  $\frac{5}{16}$ "x $\frac{5}{16}$ "x $1\frac{1}{4}$ "BS46  
Max. Torque 77 daNm

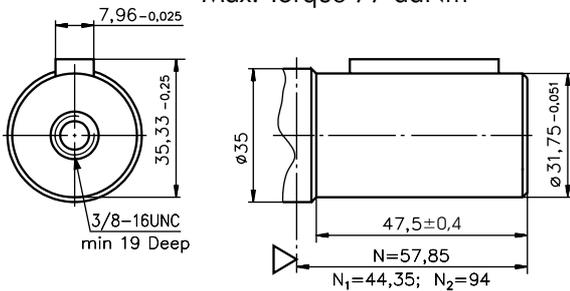

**SH** -  $\varnothing 1\frac{1}{4}$ " splined 14T, DP12/24 ANSI B92.1-1976  
Max. Torque 95 daNm

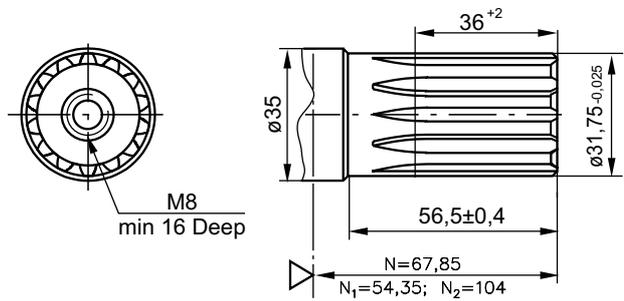



**SL** -  $\varnothing 34,85$  p.t.o. DIN 9611 Form 1  
Max. Torque 77 daNm

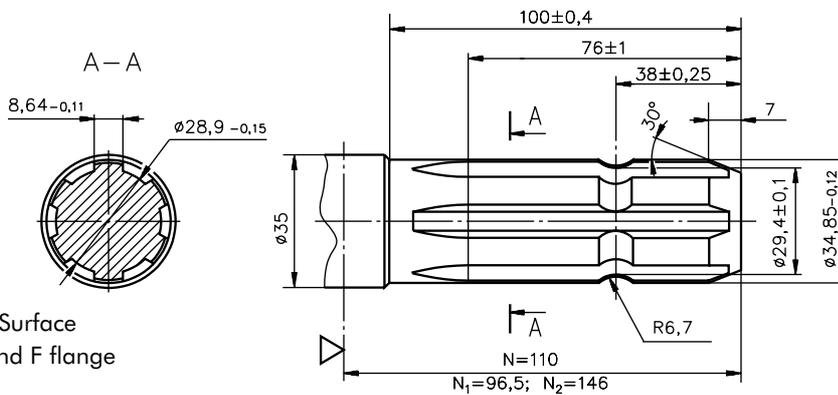


▽ - Motor Mounting Surface  
N - for standart, A and F flange  
N<sub>1</sub> - for Q flange  
N<sub>2</sub> - for W flange

**PERMISSIBLE SHAFT LOADS**

The output shaft runs in tapered bearings that permit high axial and radial forces. Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

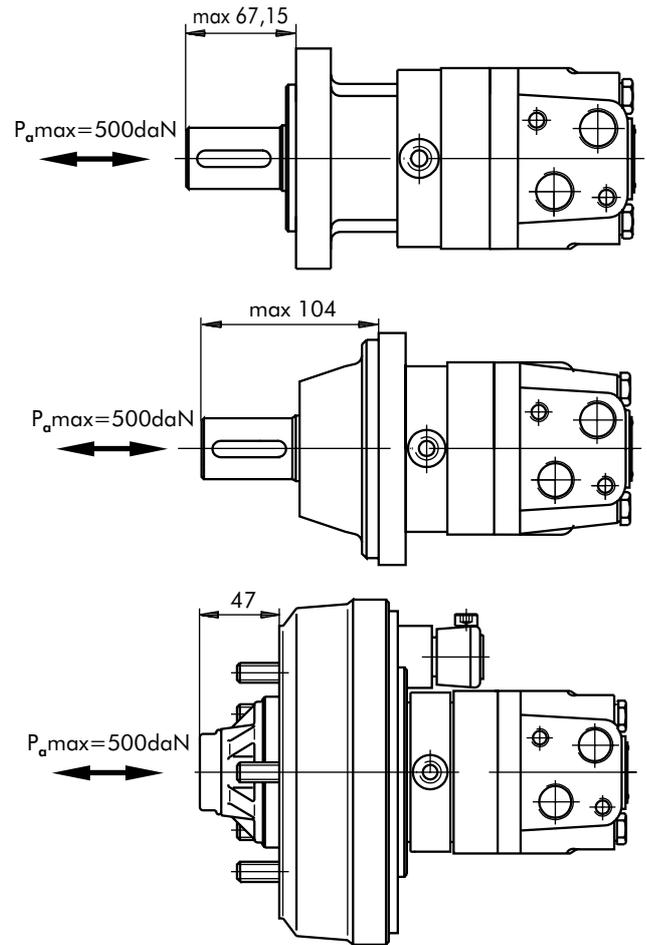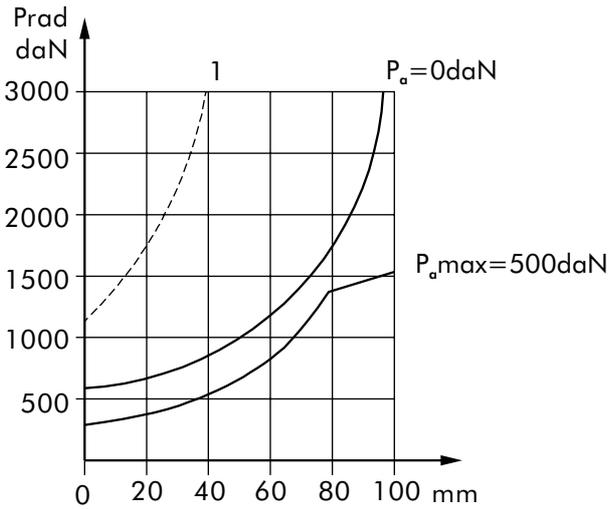


**FUNCTION DIAGRAM MSB**

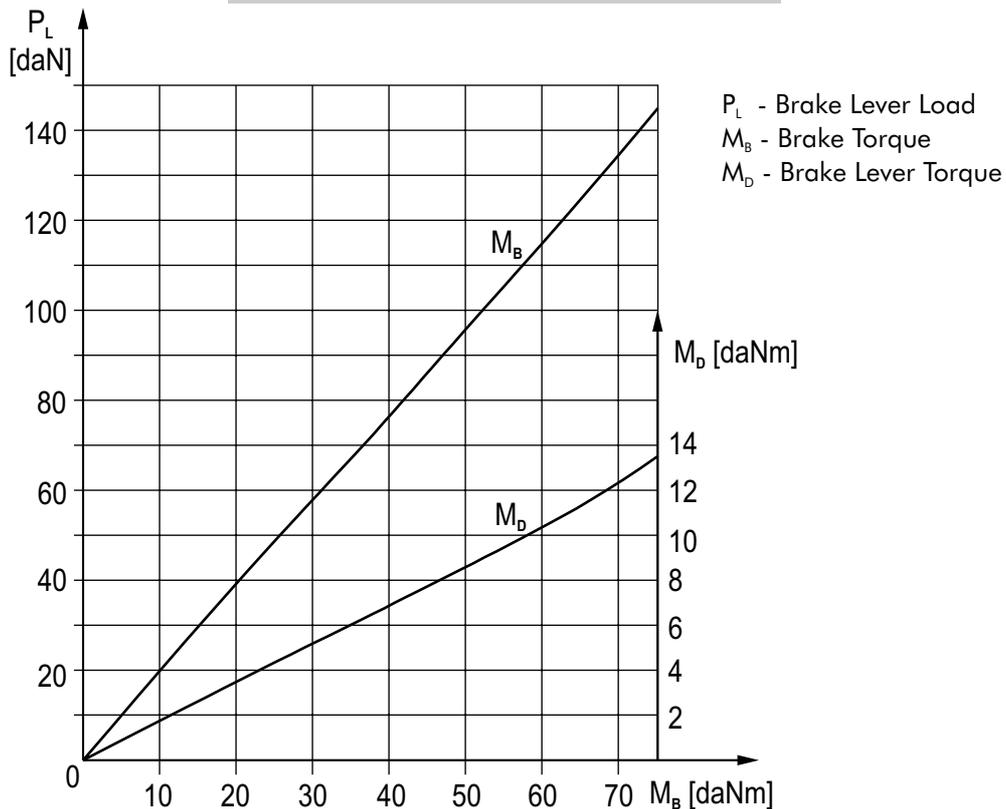

**MAX. PERMISSIBLE SHAFT SEAL PRESSURE**


**Max. return pressure without drain line or  
max. pressure in the drain line**

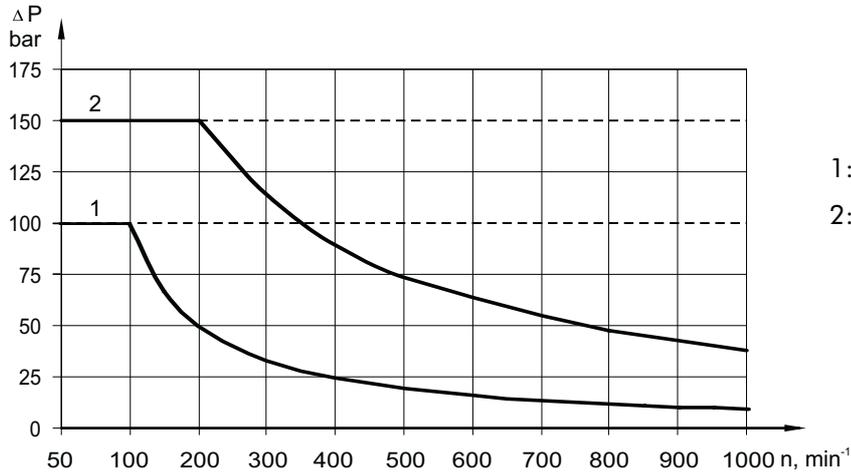


1: Drawing for Standard Shaft Seal  
 2: Drawing for High Pressure Seal ("U" Seal)

— - continuous operations  
 - - - - - intermittent operations

**MOTORS WITH TACHO CONNECTION**

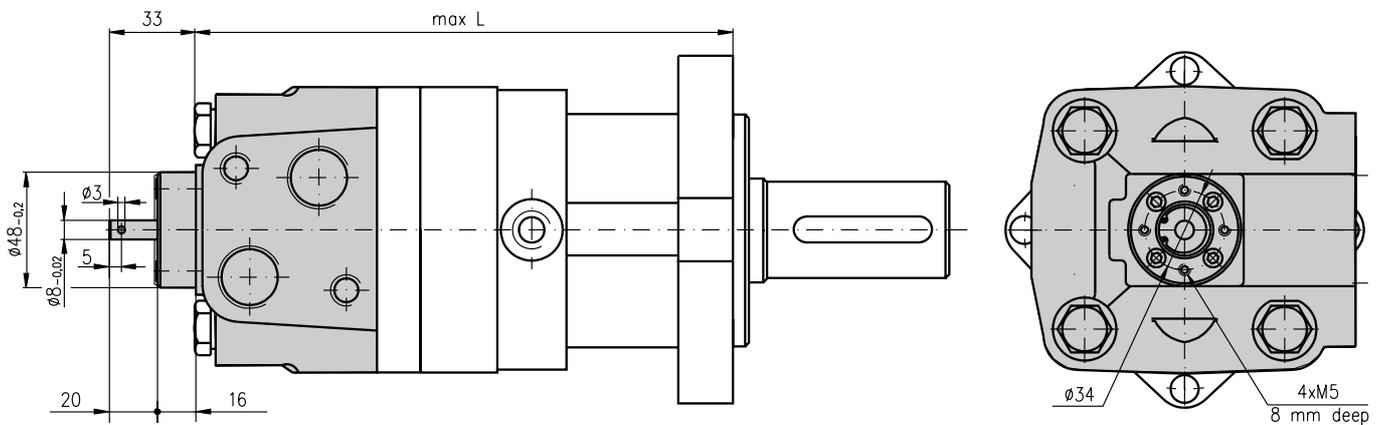

**DIMENSIONS AND MOUNTING DATA - MSS, MSV and MSU**

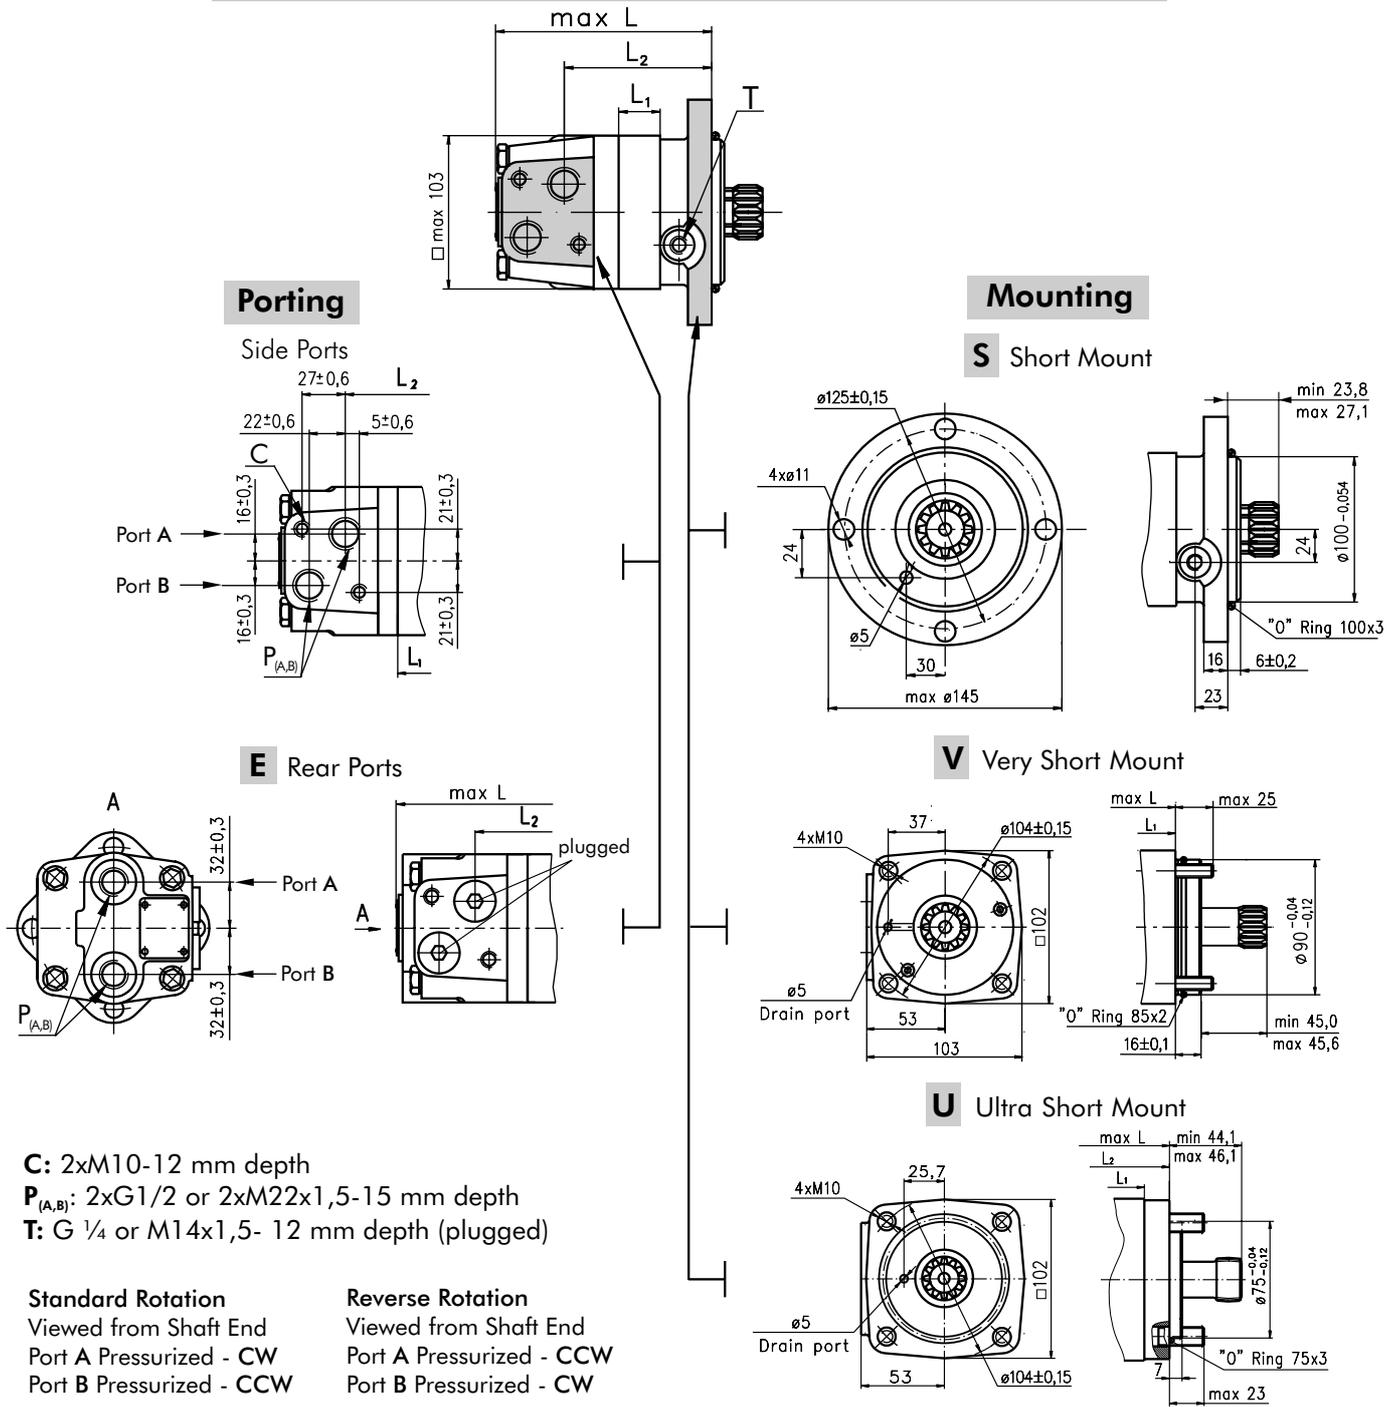

**C:** 2xM10-12 mm depth  
**P<sub>(A,B)</sub>:** 2xG1/2 or 2xM22x1,5-15 mm depth  
**T:** G 1/4 or M14x1,5- 12 mm depth (plugged)



**Standard Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CW  
 Port B Pressurized - CCW

**Reverse Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CCW  
 Port B Pressurized - CW

Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	L <sub>1</sub> , mm
MSS 80	125	83	MSSE 80	134	MSV 80	91	52	MSVE 80	97	MSU 80	105,5	63	MSUE 80	111,5	14
MSS 100	129	87	MSSE 100	138	MSV 100	94	55,5	MSVE 100	100	MSU 100	109	66,5	MSUE 100	115	17,4
MSS 125	133	90	MSSE 125	141	MSV 125	100	60	MSVE 125	105	MSU 125	113	71	MSUE 125	119	21,8
MSS 160	139	96	MSSE 160	147	MSV 160	106	66	MSVE 160	111	MSU 160	119	77	MSUE 160	125	27,8
MSS 200	146	103	MSSE 200	154	MSV 200	113	73	MSVE 200	118	MSU 200	126	84	MSUE 200	132	34,8
MSS 250	155	112	MSSE 250	163	MSV 250	121	81,5	MSVE 250	126	MSU 250	135	92,5	MSUE 250	141	43,5
MSS 315	166	123	MSSE 315	174	MSV 315	133	93	MSVE 315	138	MSU 315	146	104	MSUE 315	152	54,8
MSS 400	181	138	MSSE 400	189	MSV 400	147	108	MSVE 400	153	MSU 400	160	119	MSUE 400	167	69,4
MSS 475	194	152	MSSE 475	203	MSV 475	161	121	MSVE 475	166	MSU 475	174	132	MSUE 475	180	82,6
MSS 525	186	144	MSSE 525	195	MSV 525	153	113	MSVE 525	158	MSU 525	166	124	MSUE 525	172	74,5
MSS 565	192	150	MSSE 565	201	MSV 565	159	119	MSVE 565	164	MSU 565	172	130	MSUE 565	178	98,3

**DIMENSIONS OF THE ATTACHED COMPONENT**



**For MSS**

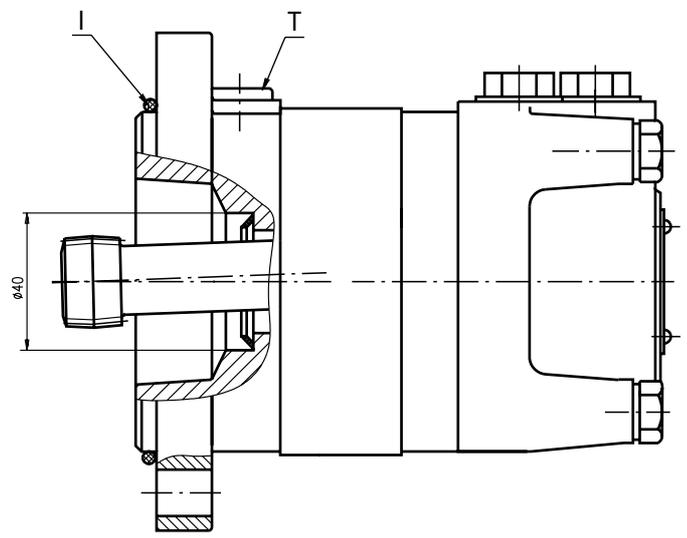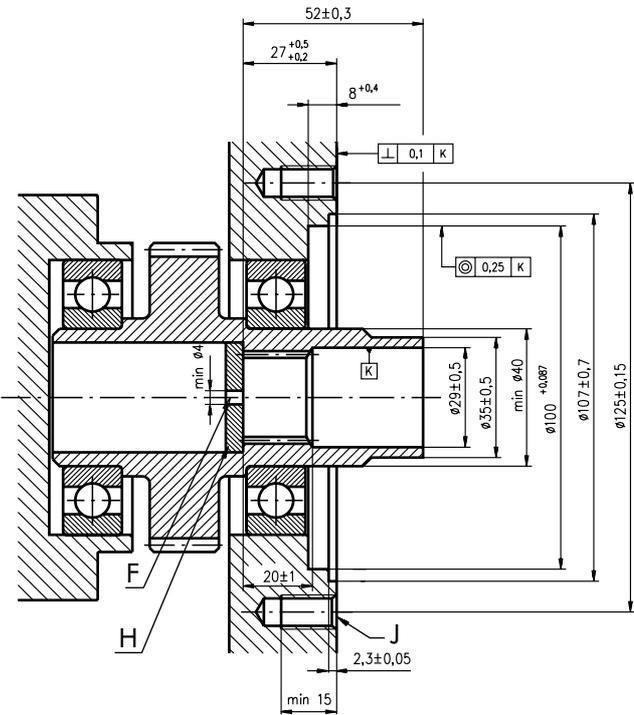

**F:** Oil circulation hole  
**H:** Hardened stop plate

**I:** O- Ring 100x3mm  
**J:** 4xM10-16 mm depth, 90°  
**T:** Drain connection G1/4 or M14x1,5



**For MSV**

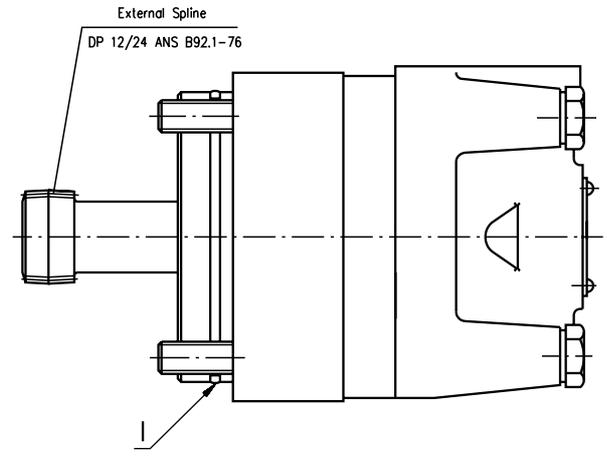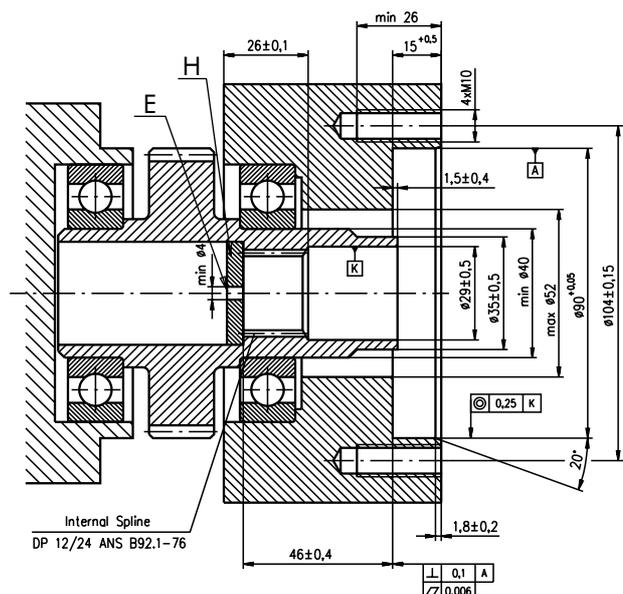

**E:** External drain hole  
**H:** Hardened stop plate  
**I:** O- Ring 85x2mm

**DIMENSIONS OF THE ATTACHED COMPONENT(continued)**

**For MSU**

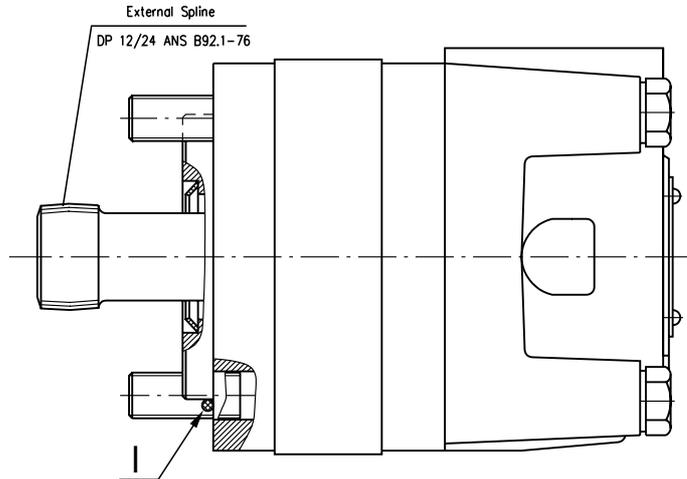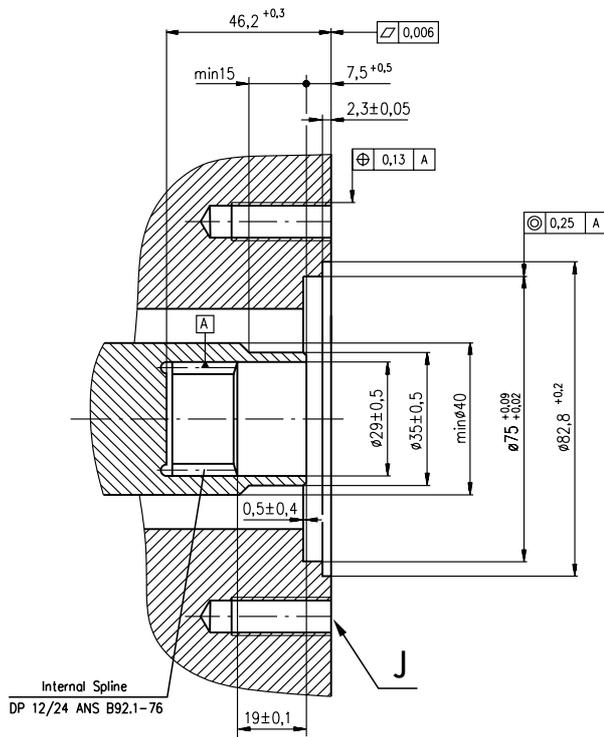

**J:** 4xM10-26 mm depth, 90°, ø104  
**I:** O- Ring 75x3 mm

**DRAIN CONNECTION**

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For MSS at the drain port of the motor;
- For MSV and MSU at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

**INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT**

Standard ANS B92.1-1976, class 5  
 [m=2.1166; corrected x.m=+0,8]

Fillet Root Side Fit		mm
Number of Teeth	z	12
Diametral Pitch	DP	12/24
Pressure Angle		30°
Pitch Dia.	D	25,4
Major Dia.	D <sub>ri</sub>	28,0 <sub>-0,1</sub>
Minor Dia.	D <sub>i</sub>	23,0 <sup>+0,033</sup>
Space Width [Circular]	L <sub>o</sub>	4,308 ± 0,020
Fillet Radius	R	0,2
Max. Measurement between Pin	L	17,62 <sup>+0,15</sup>
Pin Dia.	d	4,835 ± 0,001

Above are when hardened

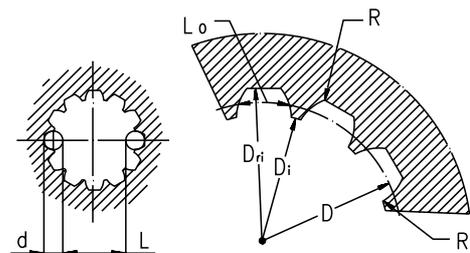

**Hardening Specification:**  
 HV=750±50 on the surface  
 HV=560 at 0,7±0,2 mm case depth  
 Material 20 MoCr4 EN 10084 or better

## ORDER CODE

	1	2	3	4	5	6	7	8	9
<b>MS</b>									

### Pos. 1 - Mounting Flange

- omit - SAE A-4 mount, four holes
- A** - SAE A-2 mount, two holes
- F** - Magneto mount, four holes
- Q** - Square mount, four holes
- B** - Motor with drum brake
- S** - Short mount
- V** - Very short mount
- U** - Ultra short mount
- W** - Wheel mount

### Pos. 2 - Port type

- omit - Side ports
- E** - Rear ports

### Pos. 3 - Displacement code

- 80** - 80,5 [cm<sup>3</sup>/rev]
- 100** - 100,0 [cm<sup>3</sup>/rev]
- 125** - 125,7 [cm<sup>3</sup>/rev]
- 160** - 159,7 [cm<sup>3</sup>/rev]
- 200** - 200,0 [cm<sup>3</sup>/rev]
- 250** - 250,0 [cm<sup>3</sup>/rev]
- 315** - 314,9 [cm<sup>3</sup>/rev]
- 400** - 397,0 [cm<sup>3</sup>/rev]
- 475** - 474,6 [cm<sup>3</sup>/rev]
- 525** - 522,7 [cm<sup>3</sup>/rev]
- 565** - 564,9 [cm<sup>3</sup>/rev]

### Pos. 4 - Shaft Extensions\*

- omit - for **B, S, U** and **V** mounting flange
- C** -  $\varnothing 32$  straight, Parallel key A10x8x45 DIN6885
- CO** -  $\varnothing 1 \frac{1}{4}$ " straight, Parallel key  $\frac{5}{16}$ "x $\frac{5}{16}$ "x $1 \frac{1}{4}$ " BS46
- K** -  $\varnothing 35$  tapered 1:10, Parallel key B6x6x20 DIN6885
- SL** -  $\varnothing 34,85$  p.t.o. DIN 9611 Form 1
- SH** -  $\varnothing 1 \frac{1}{4}$ " splined 14T ANSI B92.1-1976

### Pos. 5 - Shaft Seal Version [\(see page 19\)](#)

- omit - Low pressure seal
- U** - High pressure seal

### Pos. 6 - Ports

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

### Pos. 7 - Actuating Direction\*\*

- /R** - Right
- /L** - Left

### Pos. 8 - Special Features [\(see page 53\)](#)

### Pos. 9 - Design Series

- omit - Factory specified

#### NOTES:

- \* The permissible output torque for shafts must not be exceeded!
- \*\* Only for MSB

The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MSY

**MSY** is the new hydraulic motor in a family of "disc valve" series which has dimensions and mounting data the same as at hydraulic motors type MS.

This motor is described with 15÷20% higher technical data-max. Torque and max. Pressure drop, thereby higher power. This makes it suitable for vehicles with greater loads and speed drop.



## CONTENTS

Specification data .....	25
Function diagrams .....	26÷28
Dimensions and mounting .....	13÷14
Wheel motor .....	15
Motor with Drum Brake - MSYB .....	16
Shaft extensions .....	17
Permissible shaft loads .....	18
Function diagram for MSYB .....	18
Permissible Shaft Seal Pressure.....	19
Dimensions and mounting- MSYS, V .....	29
Internal Spline data .....	30
Order code .....	30

## OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Side and rear ports
- » Shafts- straight, splined and tapered
- » Other special features


## GENERAL

Displacement, [cm <sup>3</sup> /rev.]	200 ÷ 474,6
Max. Speed, [RPM]	155 ÷ 375
Max. Torque, [daNm]	56,6 ÷ 91
Max. Output, [kW]	9 ÷ 18,1
Max. Pressure Drop, [bar]	140 ÷ 200
Max. Oil Flow, [l/min]	75
Min. Speed, [RPM]	5 ÷ 8
Permissible Shaft Loads, [daN]	P <sub>a</sub> = 500
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm <sup>2</sup> /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop (bar)	Viscosity (mm <sup>2</sup> /s)	Oil flow in drain line (l/min)
140	20	1,5
	35	1
210	20	3
	35	2

### Pressure Losses

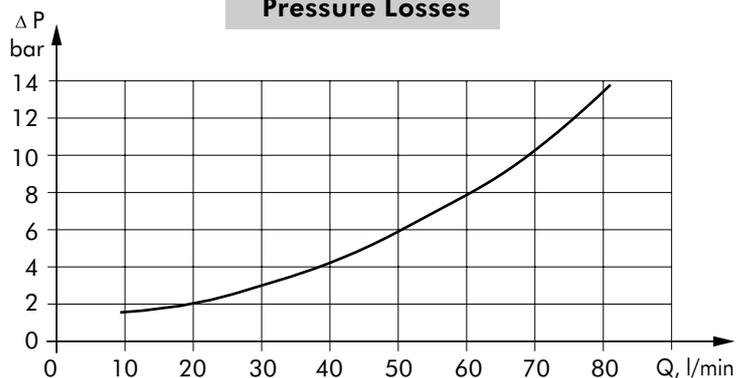

## SPECIFICATION DATA FOR MSY

Type	MSY 200	MSY 250	MSY 315	MSY 400	MSY 475	
Displacement [cm <sup>3</sup> /rev.]	200	250	314,9	397	474,6	
Max. Speed, [RPM]	cont.	375	300	240	185	155
	Int.*	450	360	285	225	185
Max. Torque [daNm]	cont.	56,6	70,8	90,0	90,0	91
	Int.*	64,5	80,6	96,0	97,0	96
	peak**	65	80,6	108	110	100
Max. Output [kW]	cont.	18,1	18,0	17	11,0	9,0
	int.*	24,0	23,8	20,2	12	11,0
Max. Pressure Drop [bar]	cont.	200	200	200	160	140
	Int.*	225	225	220	175	150
	peak**	225	225	225	200	175
Max. Oil Flow [l/min]	cont.	75	75	75	75	75
	Int.*	90	90	90	90	90
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210
	Int.*	250	250	250	250	250
	peak**	300	300	300	300	300
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140
	Int.*	175	175	175	175	175
	peak**	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]	8	8	8	8	8	
Min. Starting Torque [daNm]	at max. press. drop cont.	46,2	58,0	73,8	72,0	47
	at max. press. drop Int.*	50,7	63,6	79,2	78,7	55
Min. Speed***, [RPM]	6	6	5	5	5	
Weight, [kg]	MSY (F)	11,2	11,7	12,4	13,3	14,4
For Rear Ports	MSYW	11,7	12,2	12,9	13,8	15,0
+0,4 kg	MSYQ	11,6	12,1	12,8	13,7	14,9

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm<sup>2</sup>/s at operating temperatures.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**MSY 200**

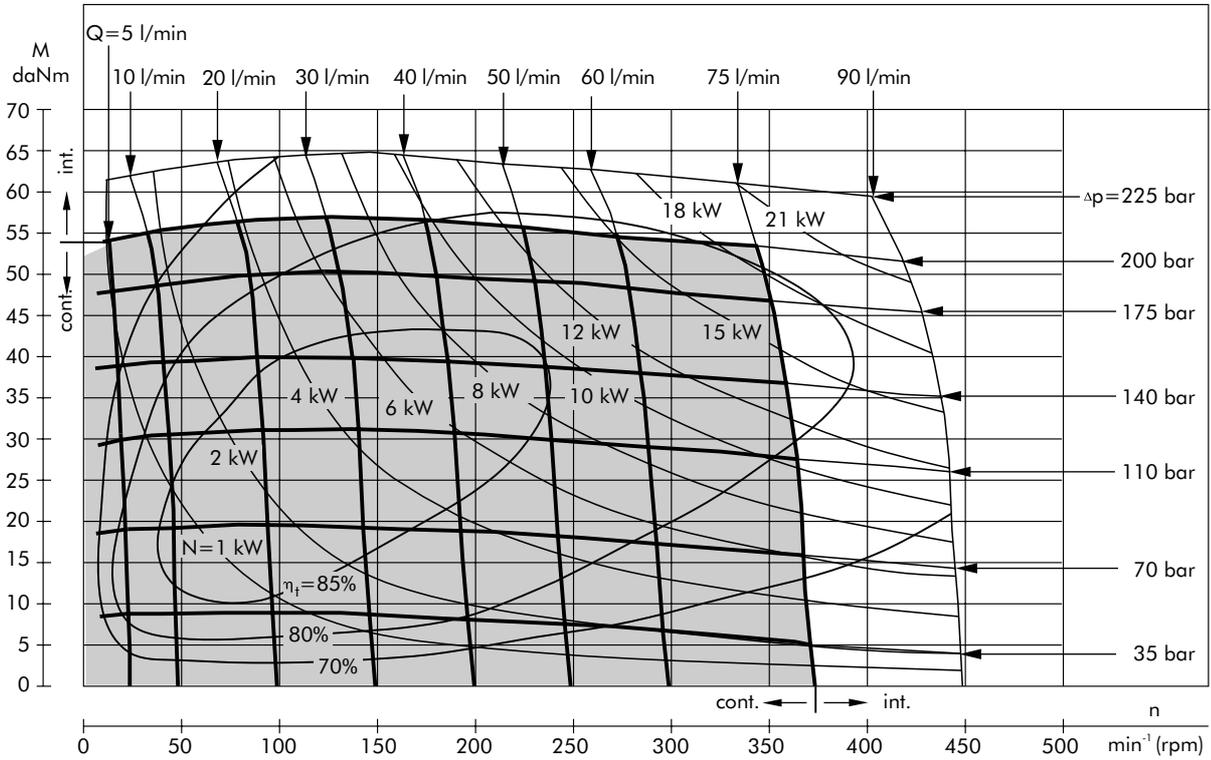


**MSY 250**

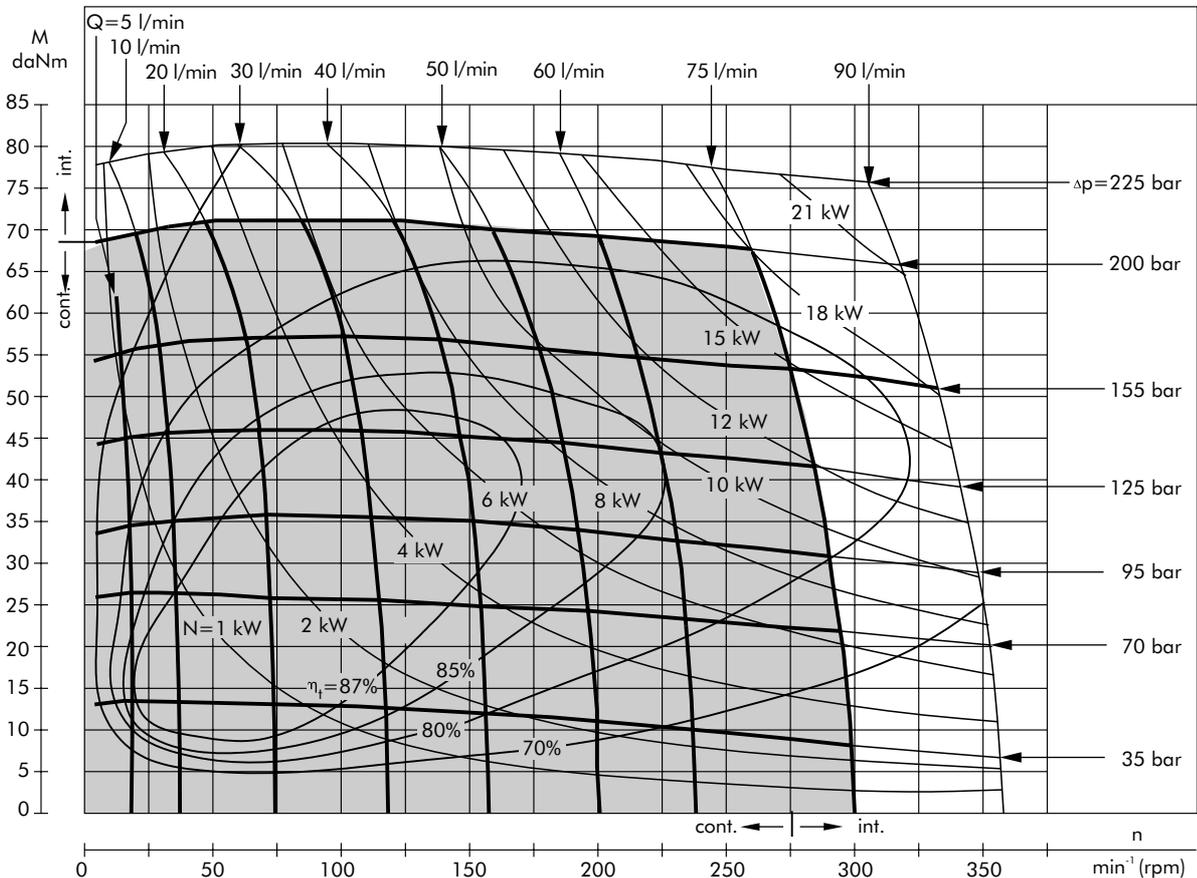


The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.

**FUNCTION DIAGRAMS**

**MSY 315**

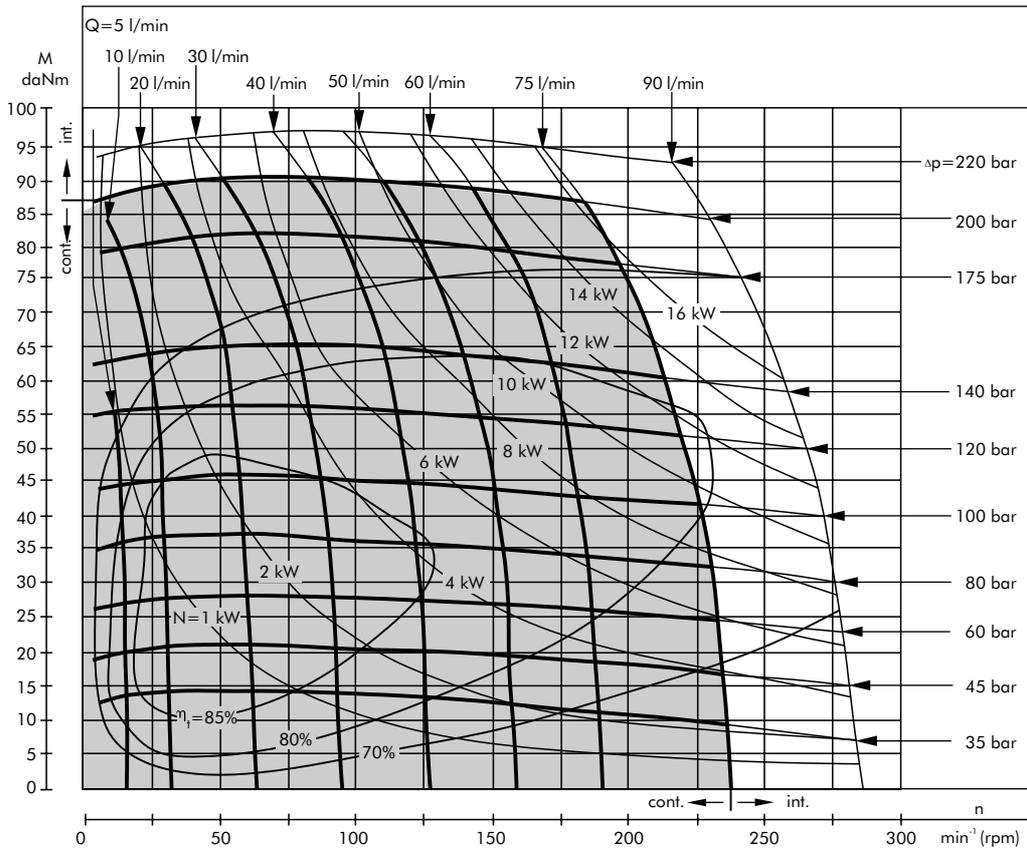


**MSY 400**

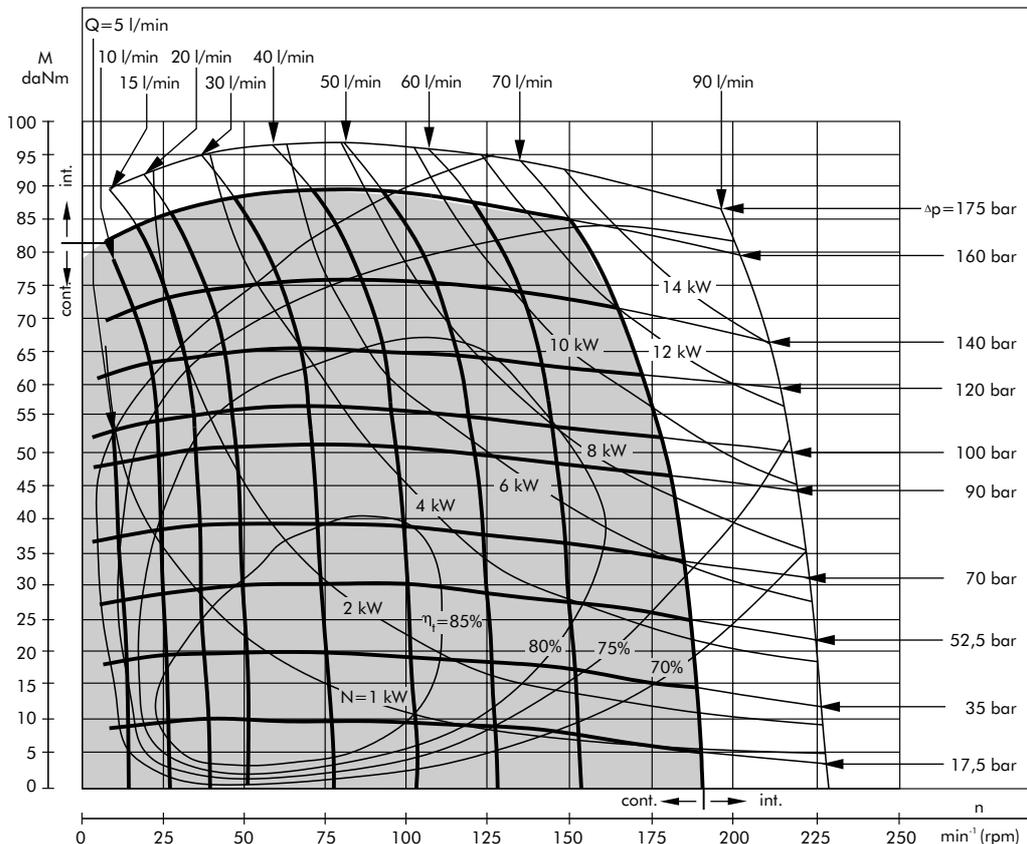

The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.

**FUNCTION DIAGRAMS**

**MSY 475**

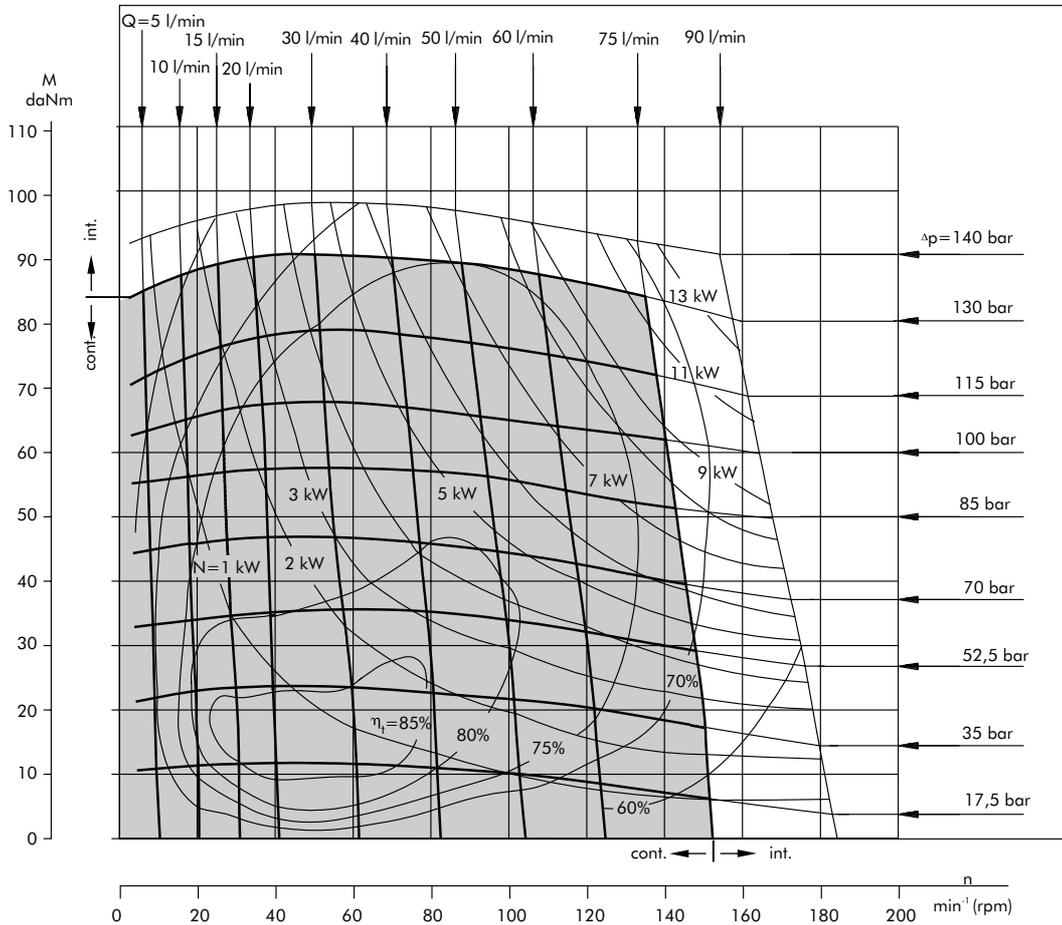


The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.


The dimensions, mounting data, shaft extensions and permissible shaft loads are the same as at hydraulic motors type MS except following below.

**DIMENSIONS OF THE ATTACHED COMPONENT**

**For MSYS**

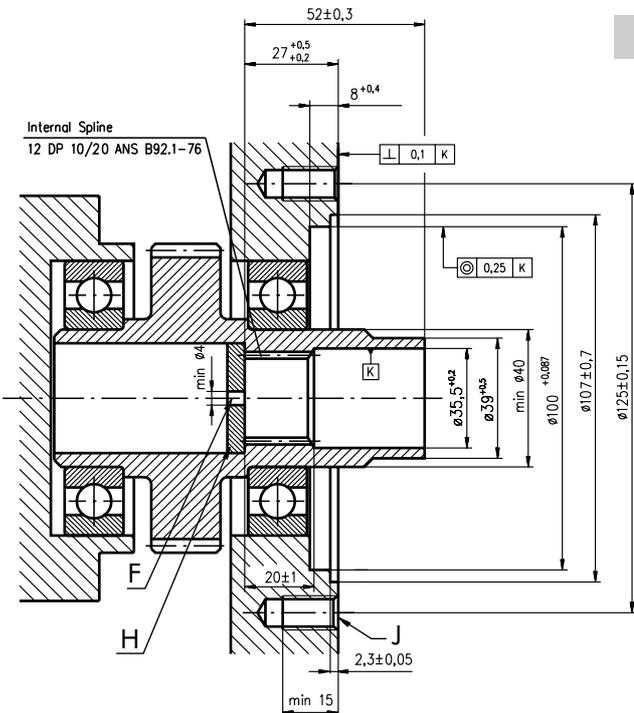


**F:** Oil circulation hole  
**H:** Hardened stop plate

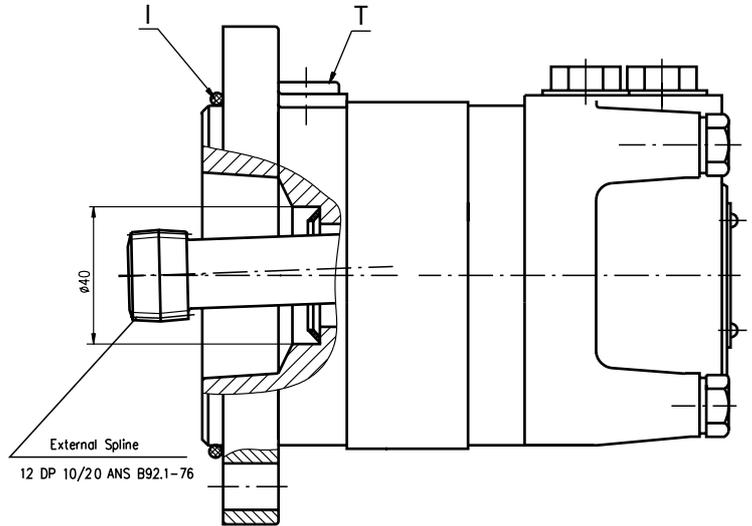


**I:** O- Ring 100x3mm  
**J:** 4xM10-16 mm depth, 90°  
**T:** Drain connection G1/4 or M14x1,5

**For MSYV**

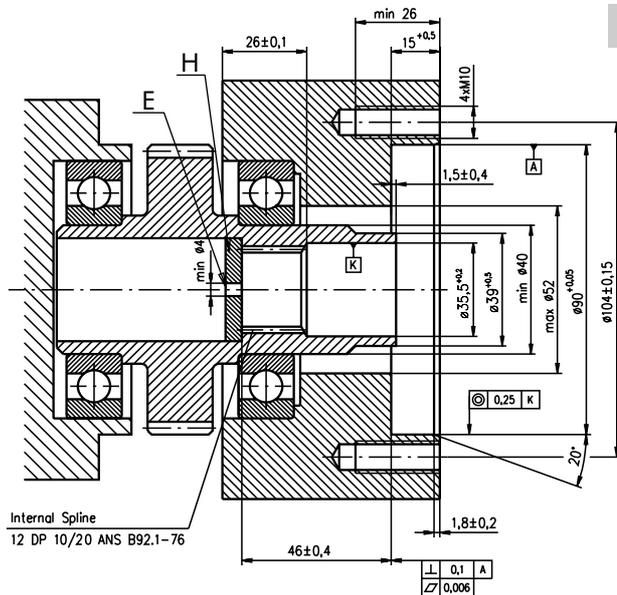

Internal Spline  
12 DP 10/20 ANS B92.1-76

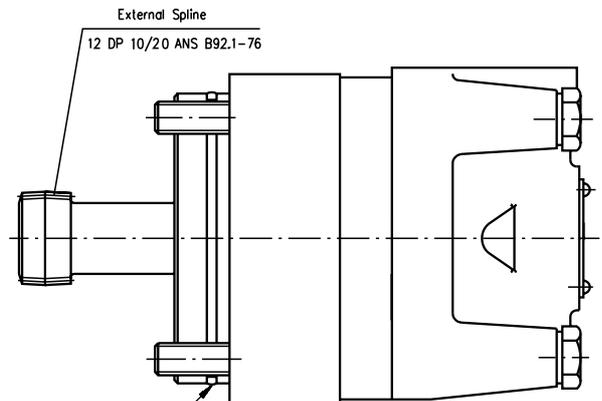

**E:** External drain hole  
**H:** Hardened stop plate  
**I:** O- Ring 85x2mm

**DRAIN CONNECTION**

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:

- For MSYS at the drain port of the motor;
- For MSYV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.


The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

**INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT**

Standard 12 DP 10/20 ANSI B92.1-1976, class 5  
[ $m=2.54$ ; corrected  $x.m=+0,4$ ]

Fillet Root Side Fit		mm
Number of Teeth	z	12
Diametral Pitch	DP	10/20
Pressure Angle		30°
Pitch Dia.	D	30,48
Major Dia.	D <sub>ri</sub>	33,2 <sup>+0,2</sup>
Minor Dia.	D <sub>i</sub>	27,8 <sup>+0,1</sup>
Space Width [Circular]	L <sub>o</sub>	4,45 <sup>+0,071</sup> <sub>+0,026</sub>
Fillet Radius	R <sub>min</sub>	0,2
Max. Measurement between Pin	L	23,39 <sup>+0,17</sup> <sub>+0,06</sub>
Pin Dia.	d	4,835±0,001

Above are when hardened

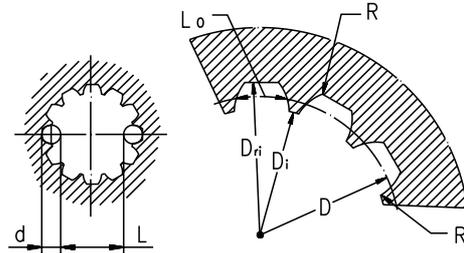

**Hardening Specification:**  
HV=750±50 on the surface  
HV=560 at 0,7±0,2 mm case depth  
Material 20 MoCr4 EN 10084 or better

**ORDER CODE**

	1	2	3	4	5	6	7	8	9
<b>MSY</b>									

**Pos. 1 - Mounting Flange**

omit - SAE A-4 mount, four holes

- A** - SAE A-2 mount, two holes
- F** - Magneto mount, four holes
- Q** - Square mount, four holes
- B** - Motor with drum brake
- S** - Short mount
- V** - Very short mount
- W** - Wheel mount

**Pos. 2 - Port type**

omit - Side ports

- E** - Rear ports

**Pos. 3 - Displacement code**

- 200** - 200,0 [cm<sup>3</sup>/rev]
- 250** - 250,0 [cm<sup>3</sup>/rev]
- 315** - 314,9 [cm<sup>3</sup>/rev]
- 400** - 397,0 [cm<sup>3</sup>/rev]
- 475** - 474,5 [cm<sup>3</sup>/rev]

**Pos. 4 - Shaft Extensions\***

omit - for **B**, **S** and **V** mounting flange

- C** - ø32 straight, Parallel key A10x8x45 DIN6885
- K** - ø35 tapered 1:10, Parallel key B6x6x20 DIN6885
- SL** - ø34,85 p.t.o. DIN 9611 Form 1
- SH** - ø1¼" splined 14T ANSI B92.1-1976

**Pos. 5 - Shaft Seal Version (see page 19)**

- omit - Low pressure seal
- U** - High pressure seal

**Pos. 6 - Ports**

- omit - BSPP (ISO 228)
- M** - Metric (ISO 262)

**Pos. 7 - Actuating Direction\*\***

- /R** - Right
- /L** - Left

**Pos. 8 - Special Features (see page 53)**

**Pos. 9 - Design Series**

- omit - Factory specified

**NOTES:**

\* The permissible output torque for shafts must not be exceeded!

\*\* Only for MSYB


The hydraulic motors are manganophosphatized as standard.

# HYDRAULIC MOTORS MT



## APPLICATION

- » Conveyors
- » Metal working machines
- » Machines for agriculture
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles
- » Plastic and rubber machinery etc.

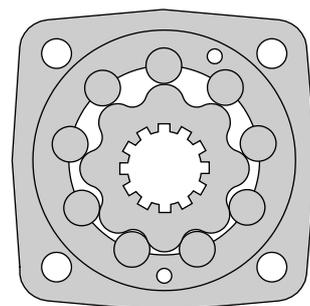

## CONTENTS

Specification data .....	32
Function diagrams .....	33÷36
Dimensions and mounting .....	37
Shaft extensions .....	38
Dimensions and mounting- MTS, V .....	39÷40
Internal Spline data .....	41
Permissible shaft loads .....	41
Tacho connection .....	42
Order code .....	42

## OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange with wheel mount
- » Short motor
- » Tacho connection
- » Speed sensing
- » Side and rear ports
- » Shafts- straight, splined and tapered
- » Metric and BSPP ports
- » Other special features


## GENERAL

Displacement,	[cm <sup>3</sup> /rev.]	161,1 ÷ 725
Max. Speed,	[RPM]	175 ÷ 625
Max. Torque,	[daNm]	47 ÷ 125
Max. Output,	[kW]	20,2 ÷ 33,5
Max. Pressure Drop,	[bar]	115 ÷ 200
Max. Oil Flow,	[l/min]	100 ÷ 125
Min. Speed,	[RPM]	5 ÷ 10
Permissible Shaft Loads,	[daN]	P <sub>0</sub> = 1000
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range,	[°C]	-30 ÷ 90
Optimal Viscosity range,	[mm <sup>2</sup> /s]	20 ÷ 75
Filtration		ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop (bar)	Viscosity (mm <sup>2</sup> /s)	Oil flow in drain line (l/min)
140	20	2,5
	35	1,5
210	20	5
	35	3

### Pressure Losses

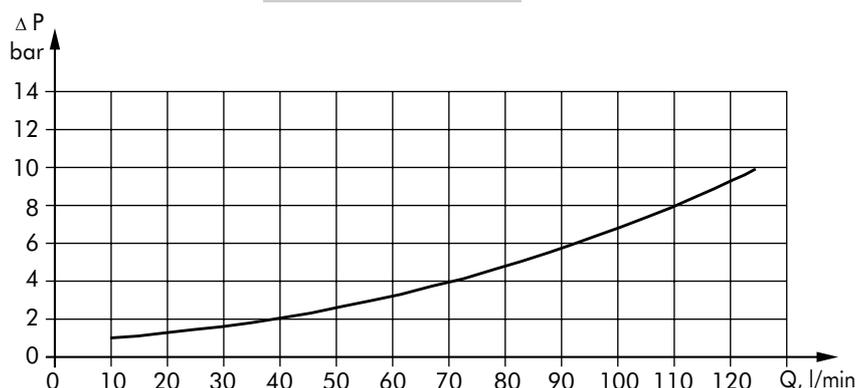

## SPECIFICATION DATA

Type	MT 160	MT 200	MT 250	MT 315	MT 400	MT 500	MT 630	MT 725	
Displacement [cm <sup>3</sup> /rev.]	161,1	201,4	251,8	326,3	410,9	523,6	631,2	724,3	
Max. Speed, [RPM]	cont.	625	625	500	380	305	240	197	164
	Int.*	780	750	600	460	365	285	234	199
Max. Torque [daNm]	cont.	47	59	73	95	108	122	138	153
	Int.*	56	71	88	114	126	137	155	172
	peak**	66	82	102	133	144	160	180	200
Max. Output [kW]	cont.	26,5	33,5	33,5	33,5	30	26,5	24,3	20,2
	int.*	32	40	40	40	35	30	27,5	26,8
Max. Pressure Drop [bar]	cont.	200	200	200	200	180	160	140	120
	Int.*	240	240	240	240	210	180	160	140
	peak**	280	280	280	280	240	210	190	165
Max. Oil Flow [l/min]	cont.	100	125	125	125	125	125	125	125
	Int.*	125	150	150	150	150	150	151,4	151,4
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210	210	210	210
	Int.*	250	250	250	250	250	250	250	250
	peak**	300	300	300	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line , [bar]	cont. 0-100 RPM	75	75	75	75	75	75	75	75
	cont. 100-300 RPM	40	40	40	40	40	40	40	40
Max. Return Pressure with Drain Line [bar]	cont. >300 RPM	20	20	20	20	20	-	-	-
	Int.* 0-max. RPM	75	75	75	75	75	75	75	75
Max. Starting Pressure with Unloaded Shaft, [bar]	cont.	140	140	140	140	140	140	140	140
	Int.*	175	175	175	175	175	175	175	175
	peak**	210	210	210	210	210	210	210	210
Min. Starting Torque [daNm]	cont.	10	10	10	10	10	10	10	10
	Int.*	34	43	53	74	84	95	95	95
Min. Speed***, [RPM]	at max. press. drop	41	52	63	89	97	106	110	115
	at max. press. drop Int.*	10	9	8	7	6	5	5	5
Weight, [kg]	MT	20	20,5	21	22	23	24	23,5	24,5
	MTW	22	22,5	23	24	25	26	25,5	26,5
	MTS	15	15,5	16	17	18	19	18,5	19,5
	MTV	11	11,5	12	13	14	15	14,5	15,5

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm<sup>2</sup>/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

## FUNCTION DIAGRAMS

### MT 160

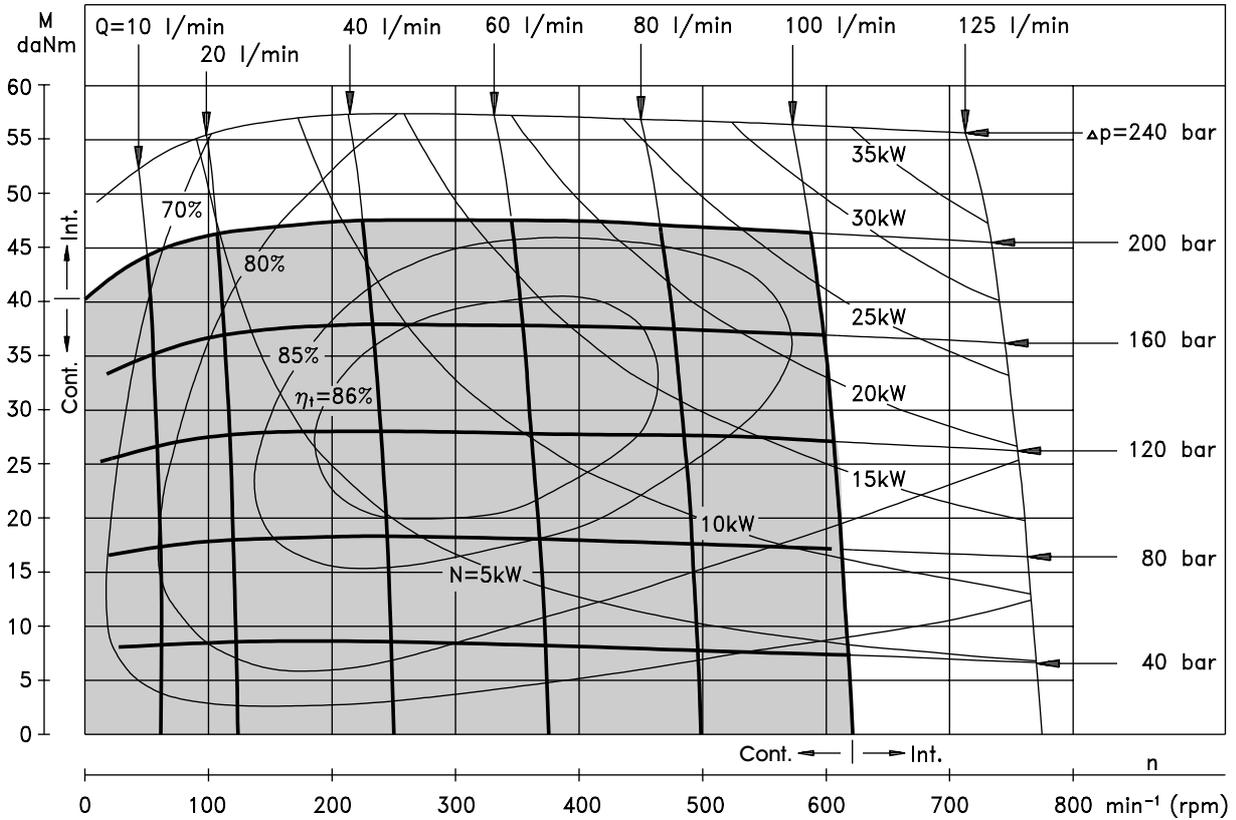


### MT 200

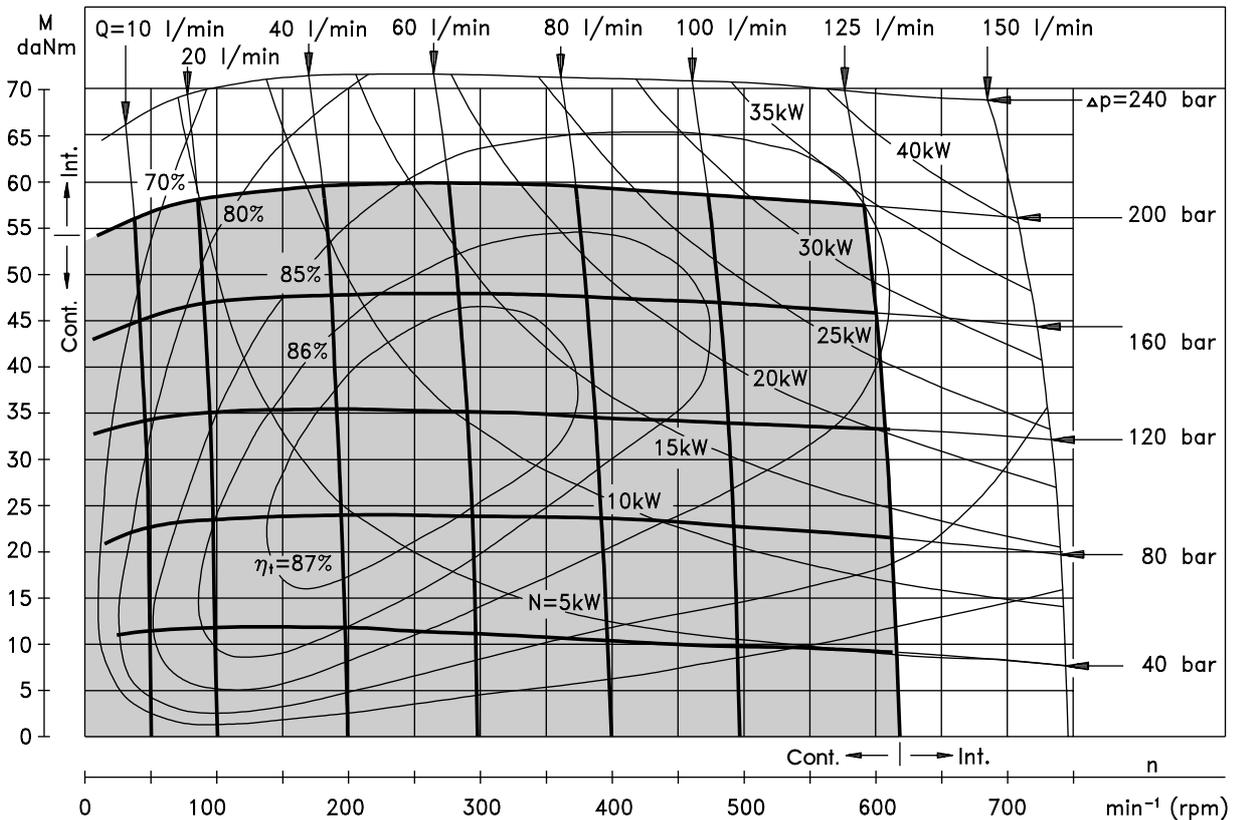


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .

**FUNCTION DIAGRAMS**

**MT 250**

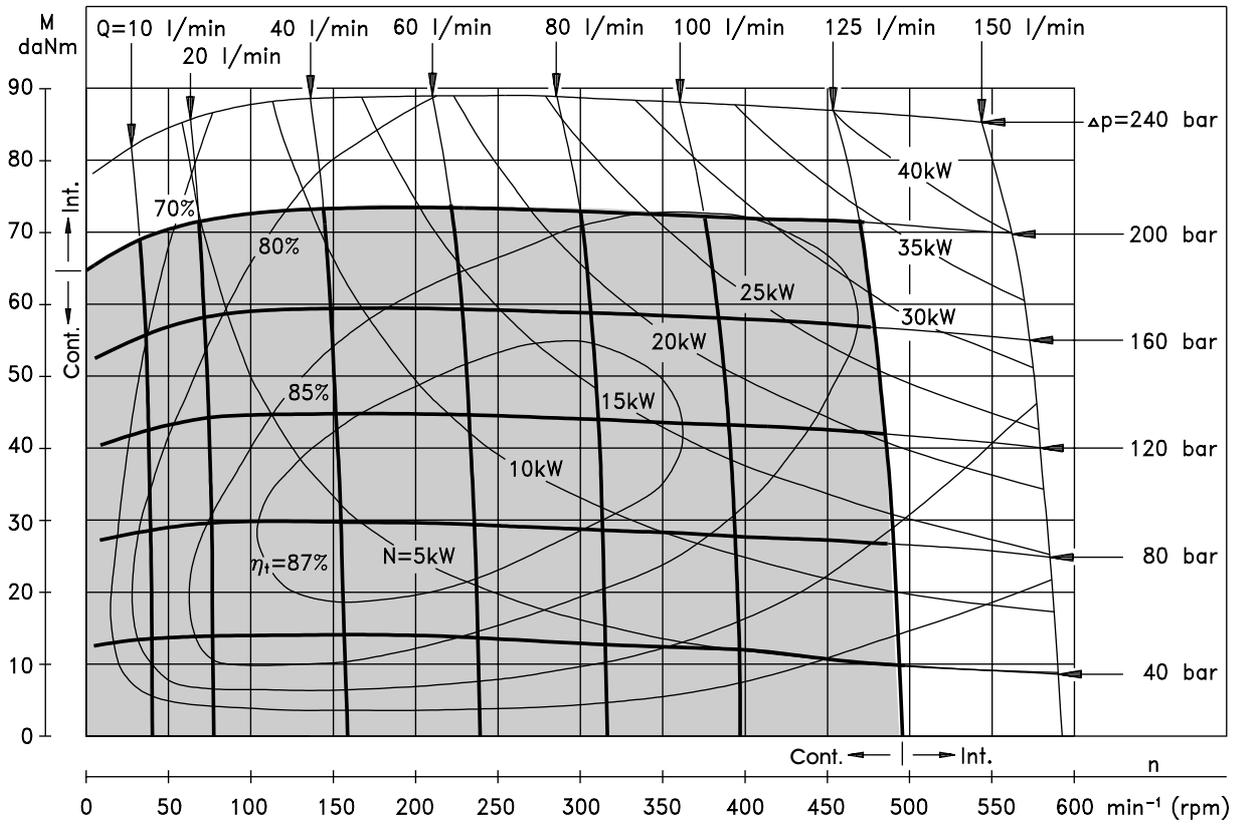


**MT 315**

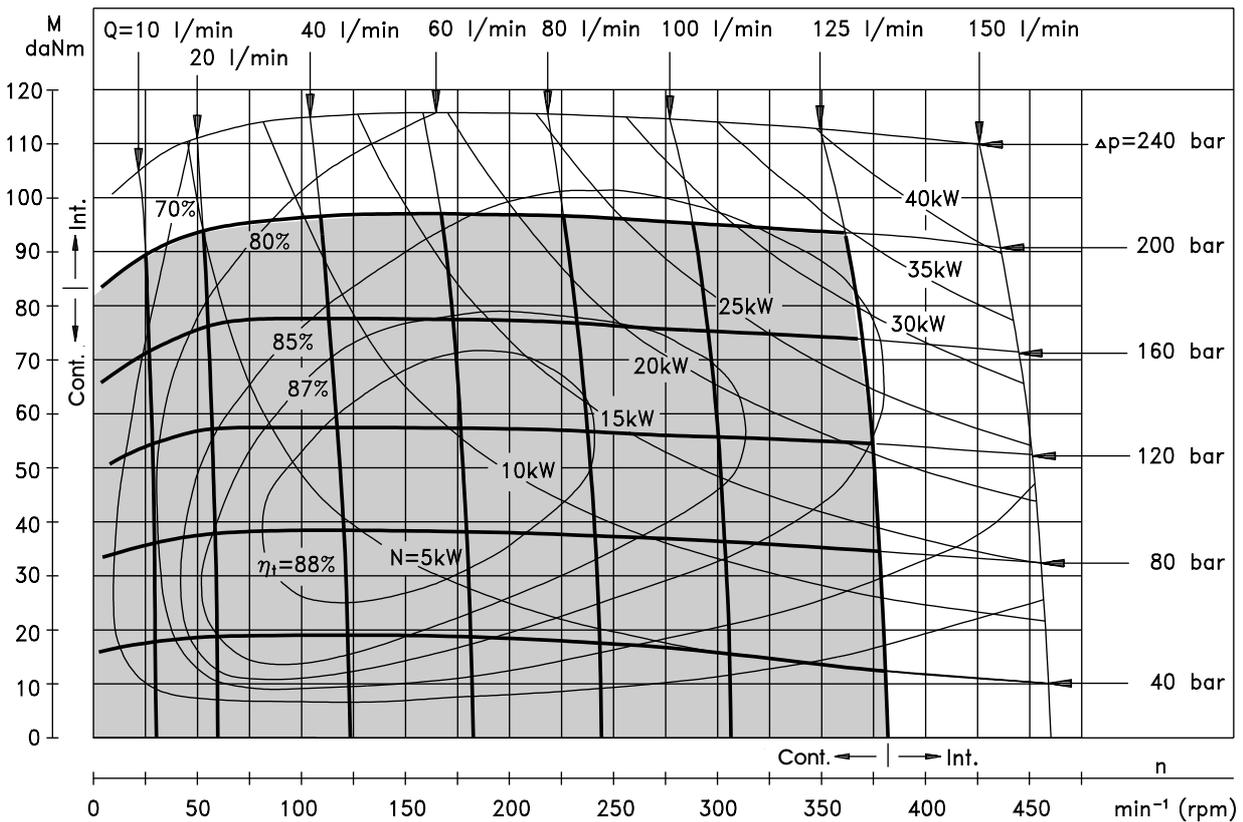


## FUNCTION DIAGRAMS

### MT 400

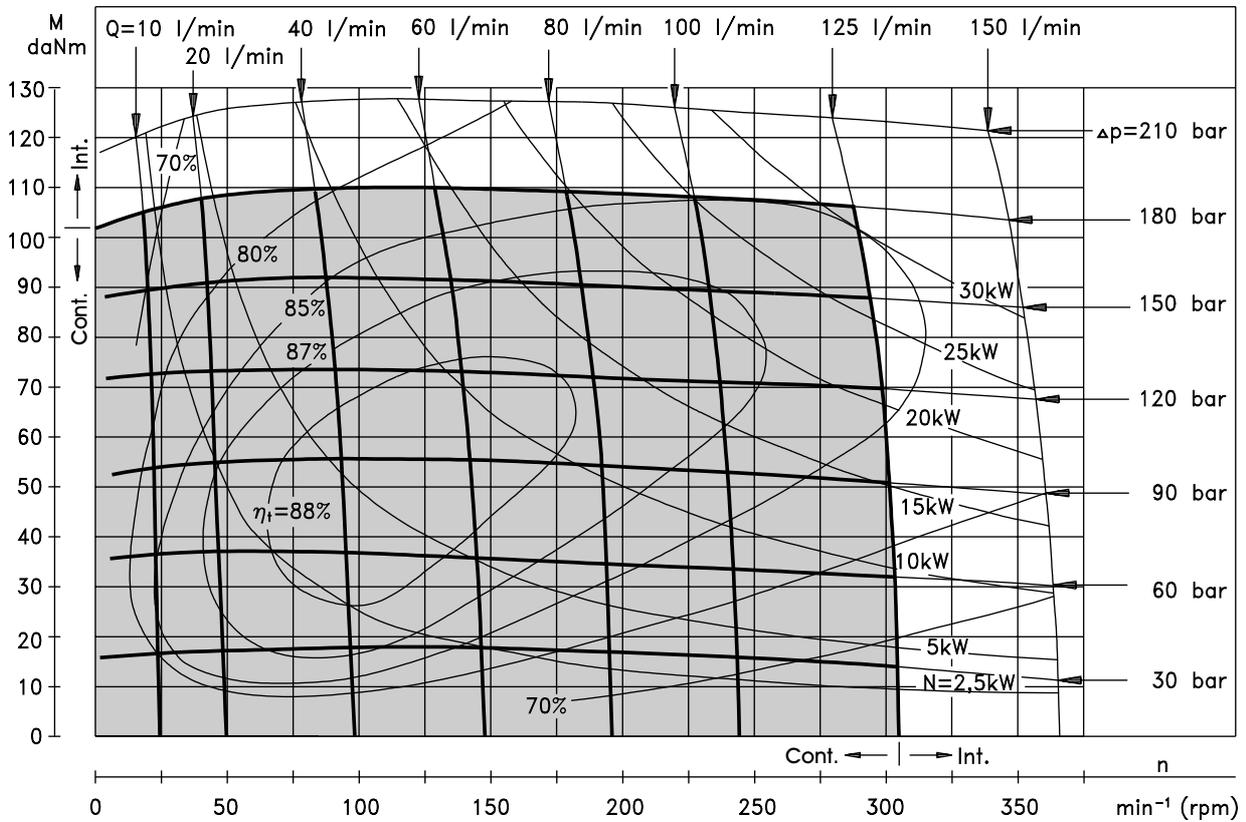


### MT 500

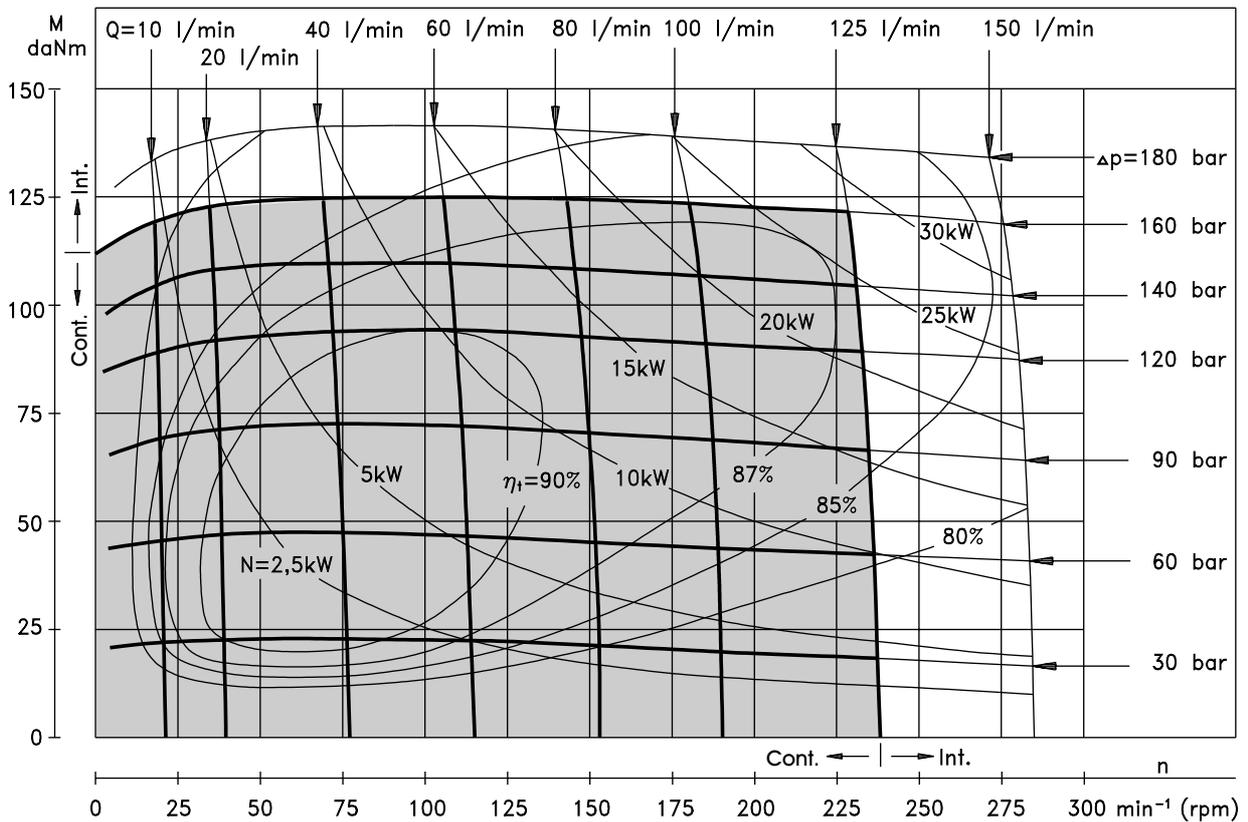


The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.

## FUNCTION DIAGRAMS

### MT 630

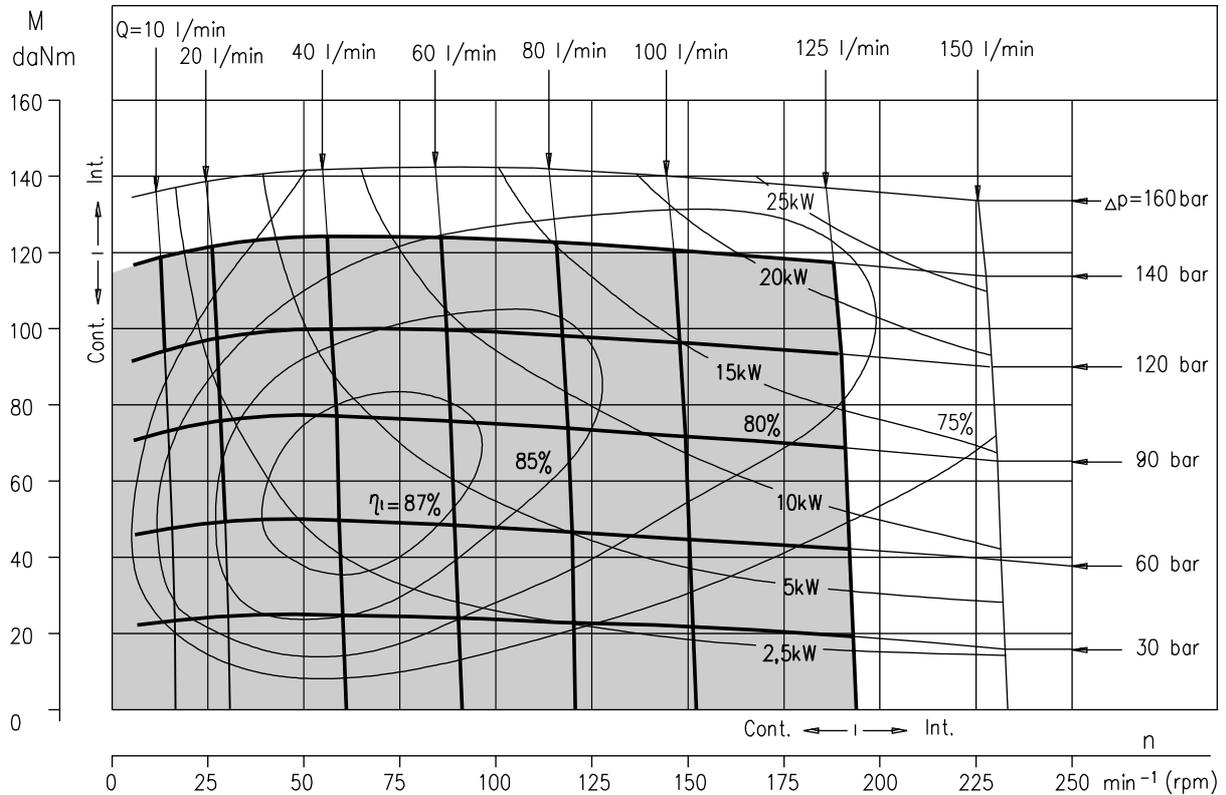


### MT 725

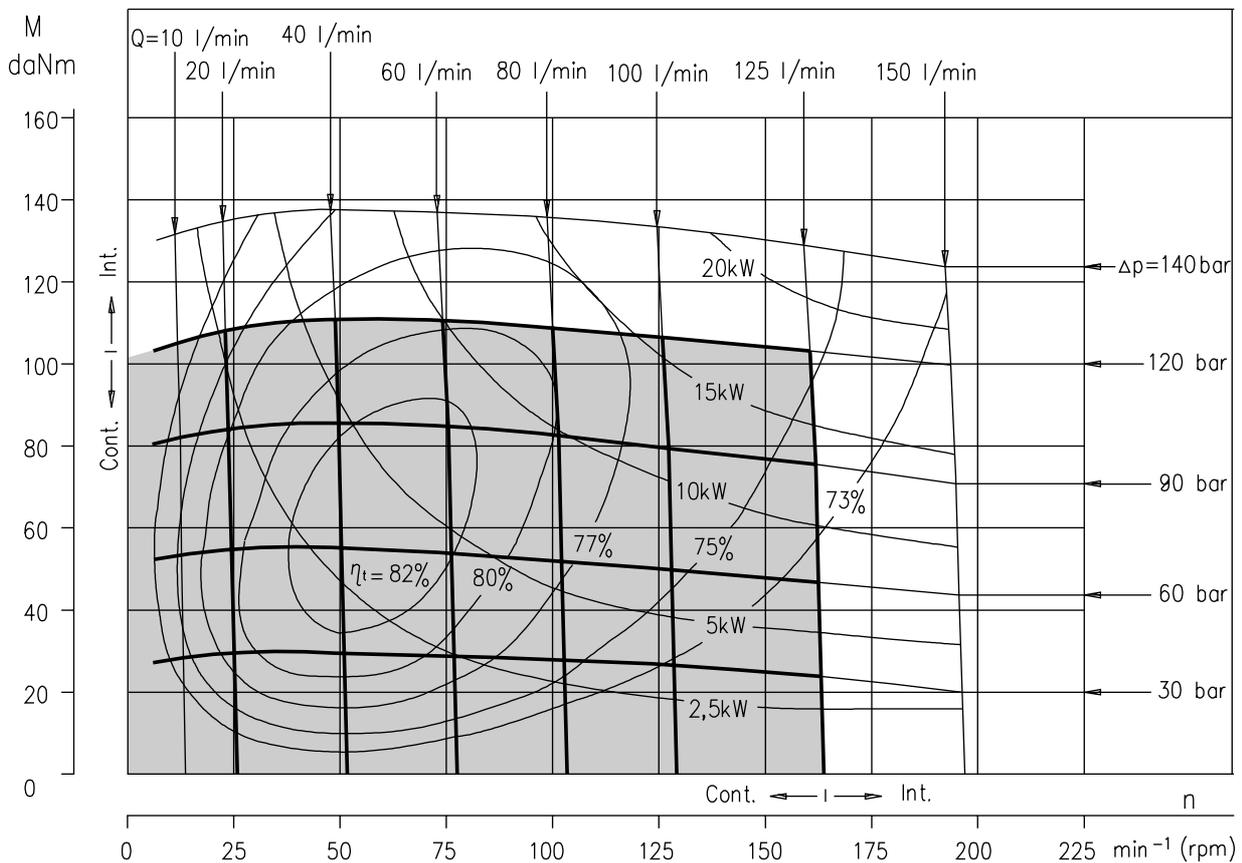


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .

## DIMENSIONS AND MOUNTING DATA

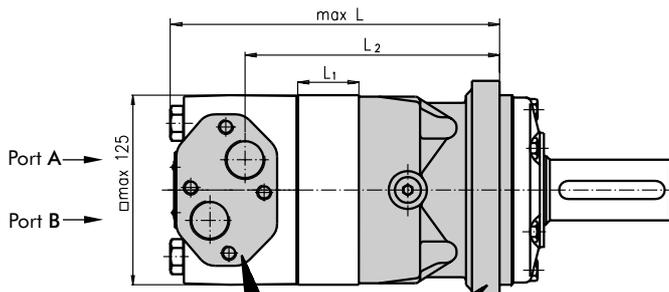



### Porting

Side Ports

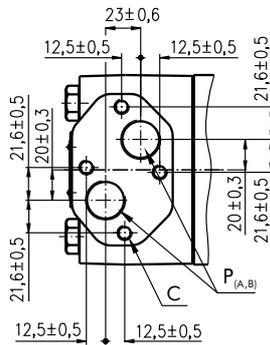




### Mounting

Square Mount (4 Holes)

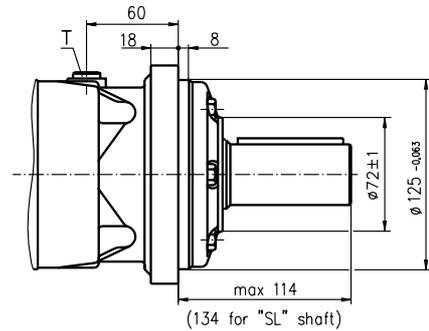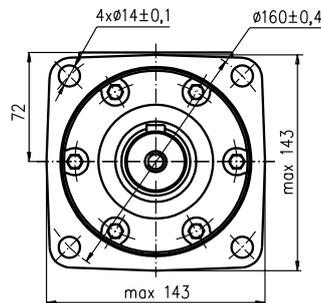

### W Wheel Mount

### E Rear Ports

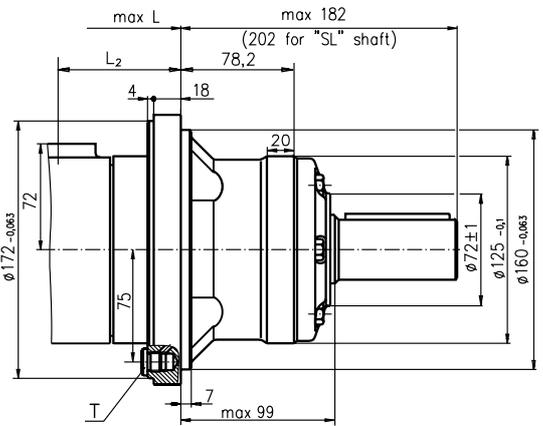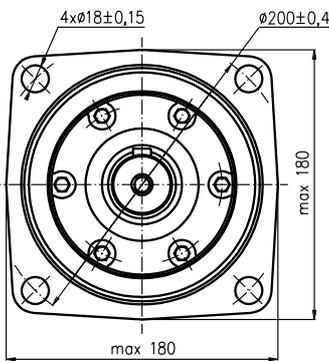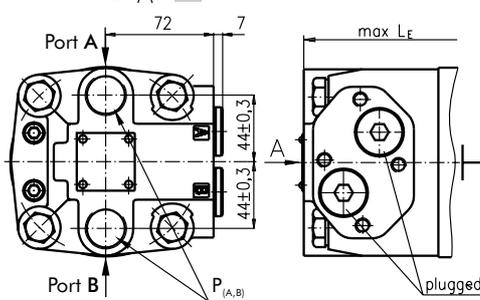

#### Standard Rotation

Viewed from Shaft End  
Port A Pressurized - CW  
Port B Pressurized - CCW

#### Reverse Rotation

Viewed from Shaft End  
Port A Pressurized - CCW  
Port B Pressurized - CW

**C:** 4xM10-10 mm depth

**P<sub>(A,B)</sub>:** 2xG3/4 or 2xM27x2-17 mm depth


**T:** G 1/4 or M14x1,5 - 12 mm depth (plugged)

Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	*L <sub>1</sub> , mm
MT 160	190	MTE 160	200	140	MTW 160	123	MTWE 160	133	73	16,5
MT 200	195	MTE 200	205	145	MTW 200	128	MTWE 200	138	78	21,5
MT 250	201	MTE 250	211	151	MTW 250	134	MTWE 250	144	84	27,8
MT 315	211	MTE 315	221	161	MTW 315	144	MTWE 315	154	94	37,0
MT 400	221	MTE 400	231	171	MTW 400	154	MTWE 400	164	104	47,5
MT 500	235	MTE 500	245	185	MTW 500	168	MTWE 500	178	118	61,5
MT 630	231	MTE 630	241	181	MTW 630	164	MTWE 630	174	114	57,5
MT 725	240	MTE 725	250	190	MTW 725	173	MTWE 725	183	123	66,5

\* The width of the roll-gerotor is 3,5 mm greater than L<sub>1</sub>.



## DIMENSIONS AND MOUNTING DATA - MTS and MTV

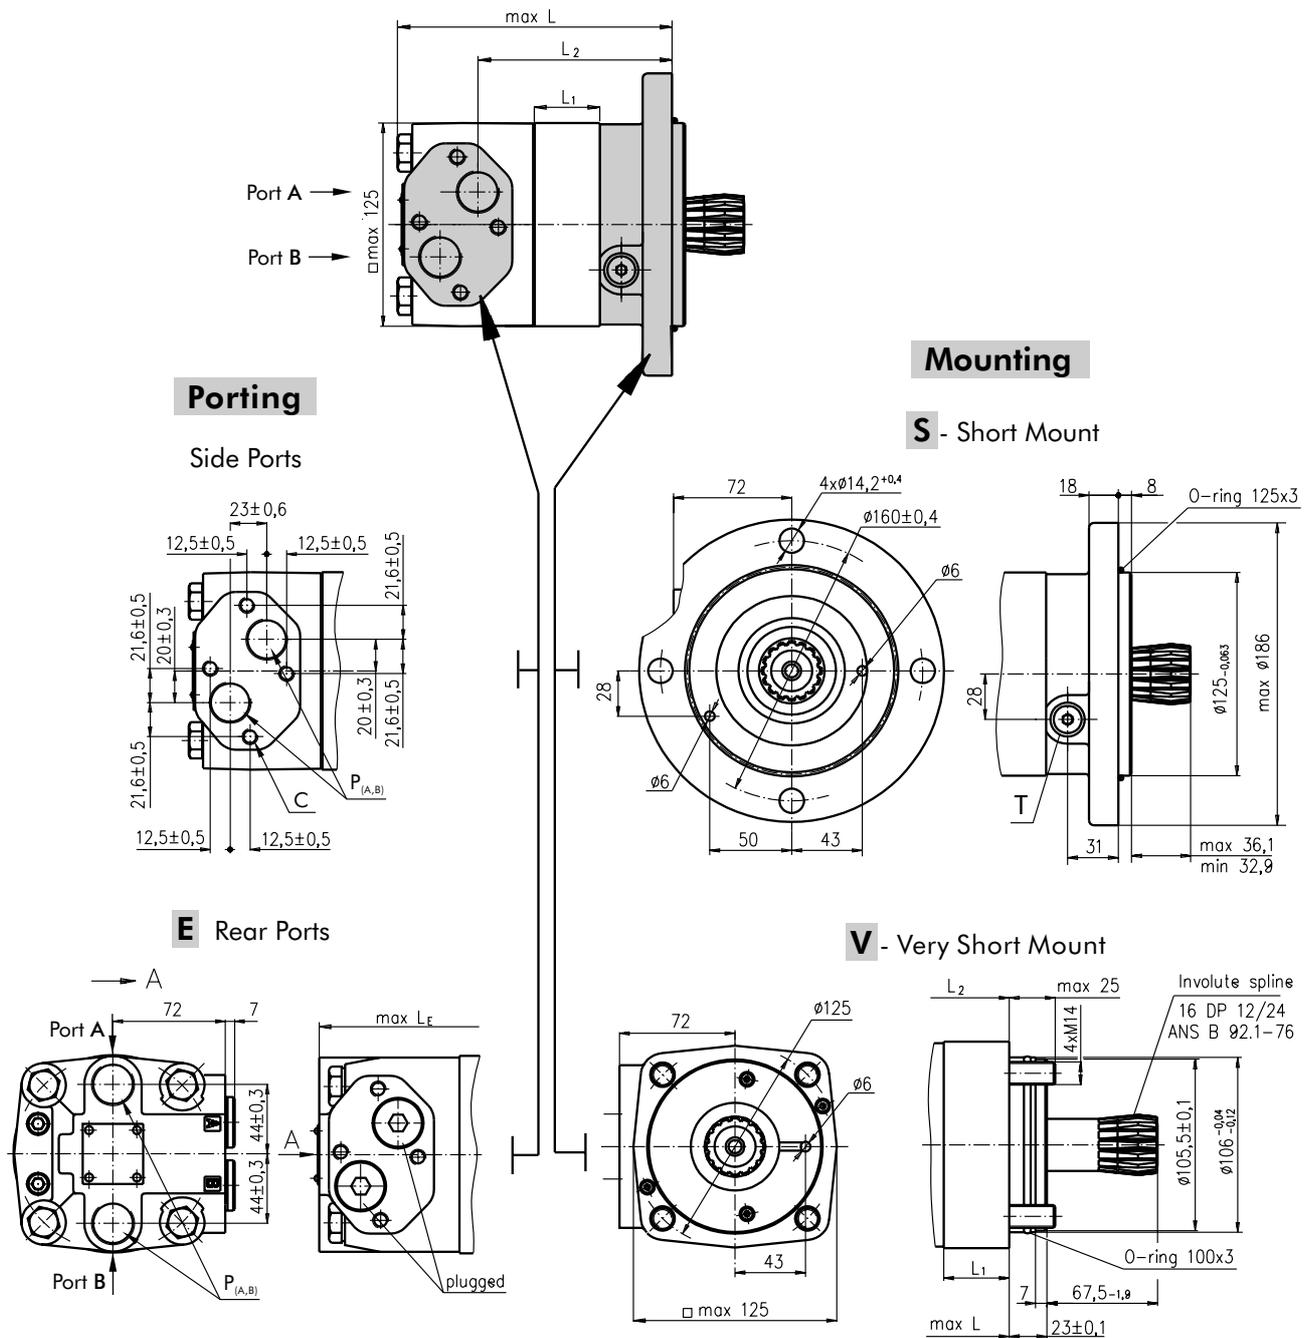

**Standard Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CW  
 Port B Pressurized - CCW

**Reverse Rotation**  
 Viewed from Shaft End  
 Port A Pressurized - CCW  
 Port B Pressurized - CW



**C:** 4xM10-10 mm depth  
**P<sub>(A,B)</sub>:** 2xG3/4 or 2xM27x2-17 mm depth  
**T:** G 1/4 or M14x1,5 - 12 mm depth (plugged)

Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	Type	L, mm	L <sub>2</sub> , mm	*L <sub>1</sub> , mm
MTS 160	146	MTSE 160	156	96	MTV 160	101	MTVE 160	111	51,5	16,5
MTS 200	151	MTSE 200	161	101	MTV 200	106	MTVE 200	116	56,5	21,5
MTS 250	157	MTSE 250	167	107	MTV 250	112	MTVE 250	122	62,8	27,8
MTS 315	166	MTSE 315	176	116	MTV 315	121	MTVE 315	131	72	37,0
MTS 400	177	MTSE 400	187	127	MTV 400	132	MTVE 400	142	82,5	47,5
MTS 500	191	MTSE 500	201	142	MTV 500	146	MTVE 500	156	96,5	61,5
MTS 630	187	MTSE 630	197	138	MTV 630	142	MTVE 630	152	92,5	57,5
MTS 725	196	MTSE 725	206	147	MTV 725	151	MTVE 725	161	101,5	66,5

\* The width of the roll-gerotor is 3,5 mm greater than L<sub>1</sub>.

**DIMENSIONS OF THE ATTACHED COMPONENT**



**MTS**

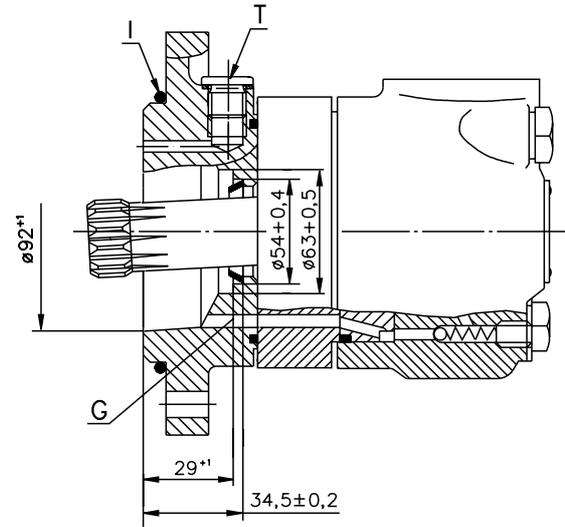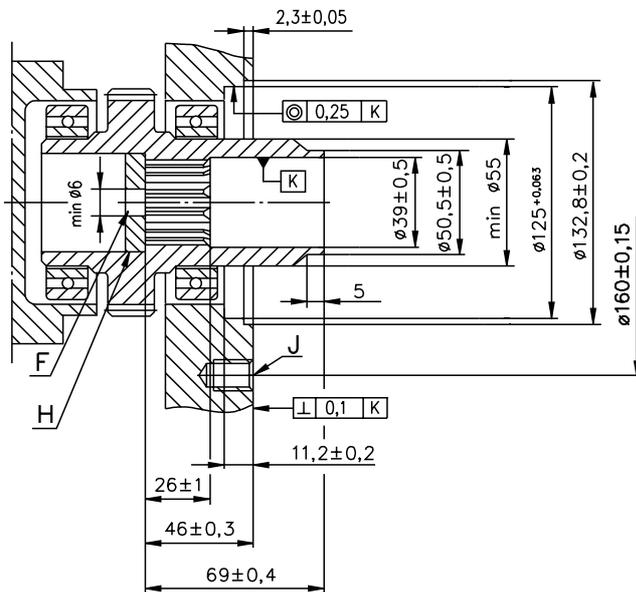

- F:** Oil circulation hole
- G:** Internal drain channel
- H:** Hardened stop plate

- I:** O- Ring 125x3mm
- J:** 4xM12-18 mm depth, 90°
- T:** Drain connection G1/4 or M14x1,5

**MTV**

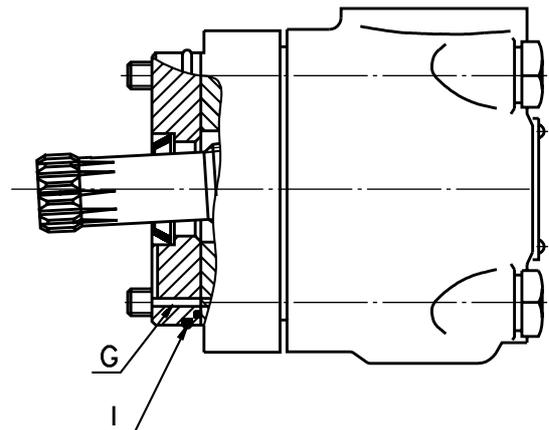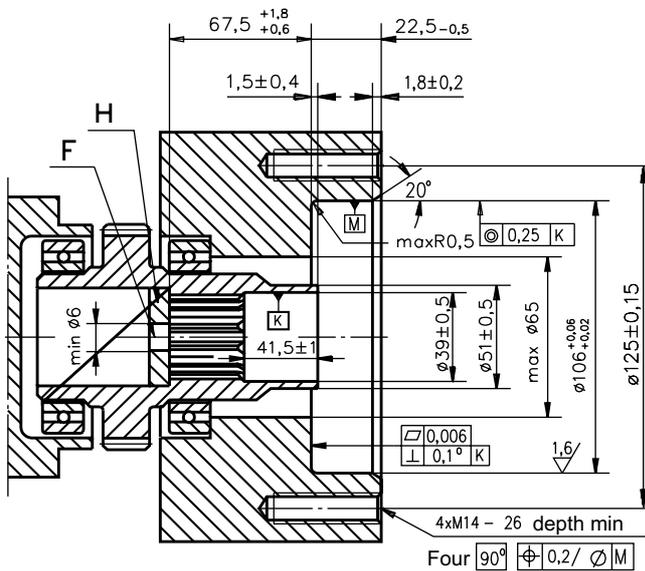

- F:** Oil circulation hole
- G:** Internal drain channel

- H:** Hardened stop plate
- I:** O- Ring 100x3mm

**DRAIN CONNECTION**

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:


- For MTS at the drain port of the motor;
- For MTV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

**INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT**

Standard ANSI B92.1-1976, class 5  
[ $m=2.1166$ ; corrected  $x.m=+1,0$ ]


Fillet Root Side Fit		mm
Number of Teeth	z	16
Diametral Pitch	DP	12/24
Pressure Angle		30°
Pitch Dia.	D	33,8656
Major Dia.	D <sub>ri</sub>	38,4 <sup>+0,4</sup>
Minor Dia.	D <sub>i</sub>	32,15 <sup>+0,04</sup>
Space Width [Circular]	Lo	4,516±0,037
Fillet Radius	R	0,5
Max. Measurement between Pin	L	26,9 <sup>+0,10</sup>
Pin Dia.	d	4,835±0,001

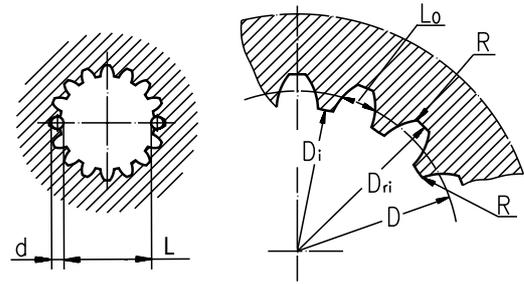


**Hardening Specification:**  
 HV=750±50 on the surface  
 HV=560 at 0,7±0,2 mm case depth  
 Material 20 MoCr4 EN 10084 or better

**PERMISSIBLE SHAFT LOADS**

The output shaft runs in tapered bearings that permit high axial and radial forces. Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

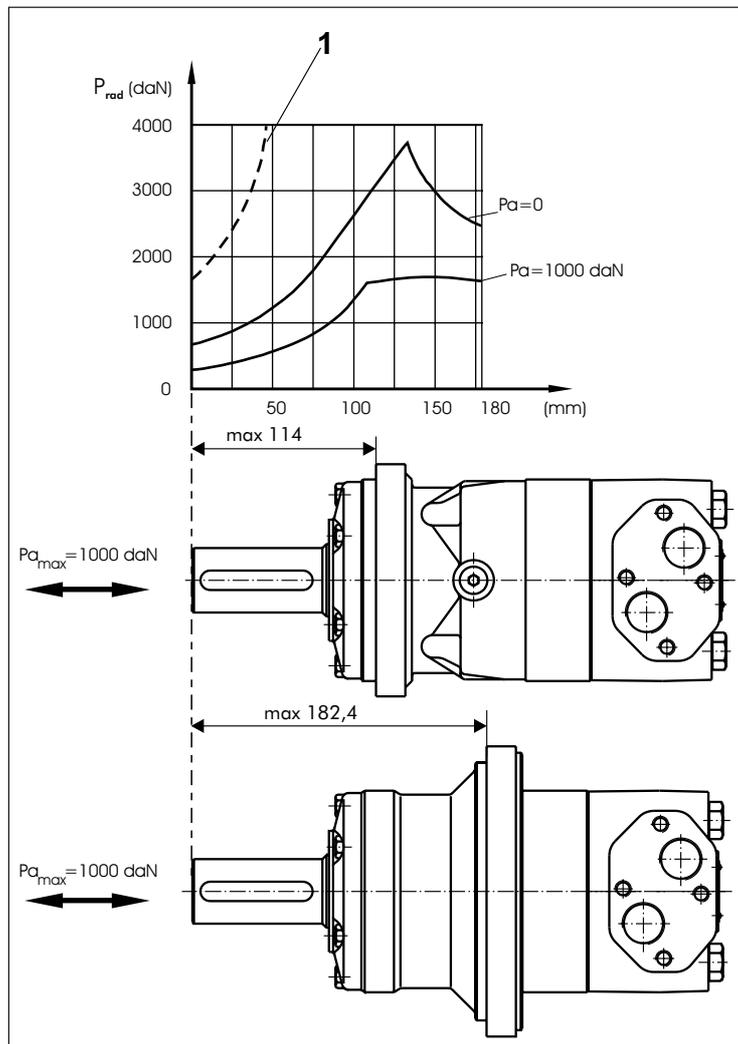

**MOTORS WITH TACHO CONNECTION**

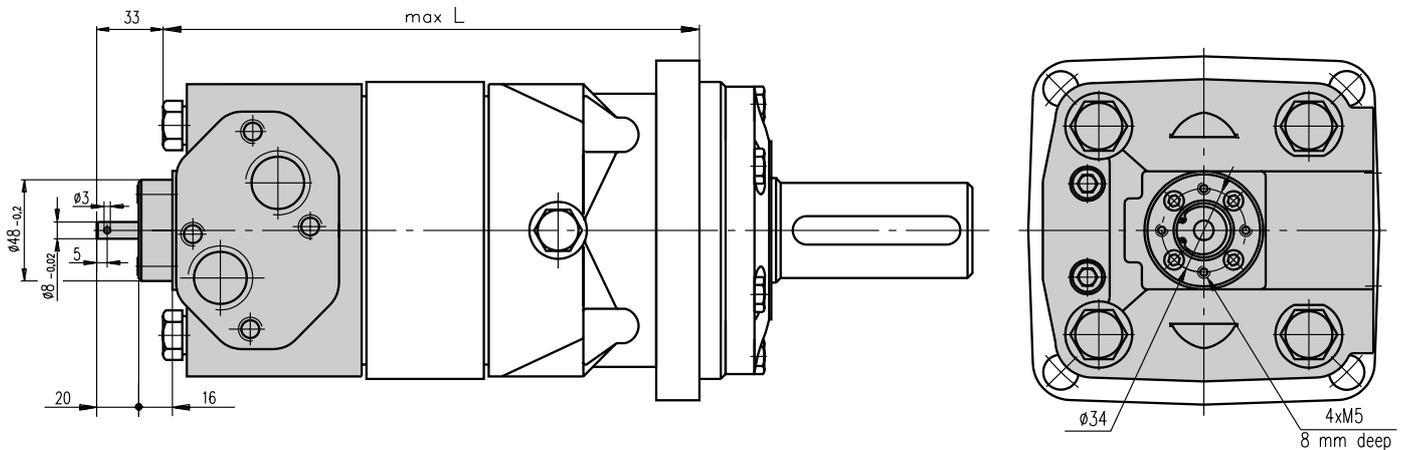

**ORDER CODE**

	1	2	3	4	5	6	7	8
<b>MT</b>								

**Pos.1 - Mounting Flange**

omit - Square mount, four holes

**S** - Short mount

**V** - Veryshort mount

**W** - Wheel mount

**Pos.2 - Port type**

omit - Side ports

**E** - Rear ports

**Pos.3 - Displacement code**

**160** - 161,1 [cm<sup>3</sup>/rev]

**200** - 201,4 [cm<sup>3</sup>/rev]

**250** - 251,8 [cm<sup>3</sup>/rev]

**315** - 326,3 [cm<sup>3</sup>/rev]

**400** - 410,9 [cm<sup>3</sup>/rev]

**500** - 523,6 [cm<sup>3</sup>/rev]

**630** - 631,2 [cm<sup>3</sup>/rev]

**725** - 724,3 [cm<sup>3</sup>/rev]

**Pos.4 - Shaft Extensions\***

omit - for **S** and **V** mounting flange

**C** -  $\varnothing 40$  straight, Parallel key A12x8x70 DIN6885

**CO** -  $\varnothing 1\frac{1}{2}$  " straight, Parallel key  $\frac{3}{8}$ "x $\frac{3}{8}$ "x $2\frac{1}{4}$ " BS46

**K** -  $\varnothing 45$  tapered 1:10, Parallel key B12x8x28 DIN6885

**SL** -  $\varnothing 34,85$  p.t.o. DIN 9611 Form 1

**SH** -  $\varnothing 1\frac{1}{2}$ " splined 17T ANSI B92.1-1976

**Pos.5 - Shaft Seal Version**

omit - Low pressure seal

**U** - High pressure seal

**Pos.6 - Ports**

omit - BSPP (ISO 228)

**M** - Metric (ISO 262)

**Pos.7 - Special Features (see page 53)**

**Pos.8 - Design Series**

omit - Factory specified

**NOTES:**

\* The permissible output torque for shafts must not be exceeded!


The hydraulic motors are mangano-phosphatized as standard.

# HYDRAULIC MOTORS MV



## APPLICATION

- » Conveyors
- » Metal working machines
- » Machines for agriculture
- » Road building machines
- » Mining machinery
- » Food industries
- » Special vehicles
- » Plastic and rubber machinery etc.

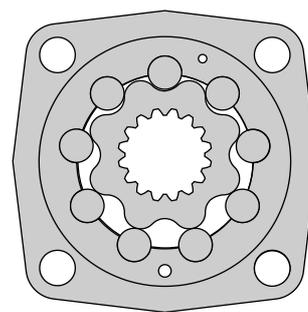

## CONTENTS

Specification data .....	44
Function diagrams .....	45 ÷ 47
Permissible shaft loads .....	47
Dimensions and mounting .....	48
Dimensions and mounting- MVS .....	49
Dimensions and mounting- MVV .....	50
Internal Spline data .....	51
Tacho connection .....	51
Shaft extensions .....	52
Order code .....	52

## OPTIONS

- » Model- Disc valve, roll-gerotor
- » Flange and wheel mount
- » Short motor
- » Tacho connection
- » Speed sensing
- » Side ports
- » Shafts- straight, splined and tapered
- » Metric and BSPP ports
- » Other special features


## GENERAL

Displacement, [cm <sup>3</sup> /rev.]	314,5 ÷ 801,8
Max. Speed, [RPM]	250 ÷ 510
Max. Torque, [daNm]	92 ÷ 188
Max. Output, [kW]	42,5 ÷ 53,5
Max. Pressure Drop, [bar]	160 ÷ 200
Max. Oil Flow, [l/min]	160 ÷ 200
Min. Speed, [RPM]	5 ÷ 10
Permissible Shaft Loads, [daN]	P <sub>a</sub> = 1500
Pressure fluid	Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)
Temperature range, [°C]	-30 ÷ 90
Optimal Viscosity range, [mm <sup>2</sup> /s]	20 ÷ 75
Filtration	ISO code 20/16 (Min. recommended fluid filtration of 25 micron)

### Oil flow in drain line

Pressure drop (bar)	Viscosity (mm <sup>2</sup> /s)	Oil flow in drain line (l/min)
140	20	3
	35	2
210	20	6
	35	4

### Pressure Losses

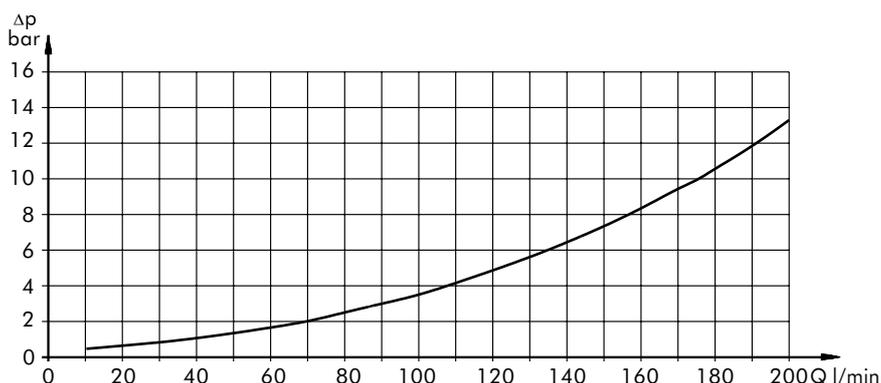

## SPECIFICATION DATA

Type		MV 315	MV 400	MV 500	MV 630	MV 800
Displacement [cm <sup>3</sup> /rev.]		314,5	400,9	499,6	629,1	801,8
Max. Speed, [RPM]	cont.	510	500	400	315	250
	Int.*	630	600	480	380	300
Max. Torque [daNm]	cont.	92	118	146	166	188
	Int.*	111	141	176	194	211
	peak**	129	164	205	221	247
Max. Output [kW]	cont.	42,5	53,5	53,5	48	42,5
	int.*	51	64	64	56	48
Max. Pressure Drop [bar]	cont.	200	200	200	180	160
	Int.*	240	240	240	210	180
	peak**	280	280	280	240	210
Max. Oil Flow [l/min]	cont.	160	200	200	200	200
	Int.*	200	240	240	240	240
Max. Inlet Pressure [bar]	cont.	210	210	210	210	210
	Int.*	250	250	250	250	250
	peak**	300	300	300	300	300
Max. Return Pressure without Drain Line or Max. Pressure in Drain Line , [bar]	cont. 0-100 RPM	60	60	60	60	60
	cont. 100-300 RPM	30	30	30	30	30
	cont. >300 RPM	20	20	20	20	20
	Int.* 0-max. RPM	75	75	75	75	75
Max. Return Pressure with Drain Line [bar]	cont.	140	140	140	140	140
	Int.*	175	175	175	175	175
	peak**	210	210	210	210	210
Max. Starting Pressure with Unloaded Shaft, [bar]		8	8	8	8	8
Min. Starting Torque [daNm]	at max. press. drop cont.	71	91	113	133	151
	at max. press. drop Int.*	85	109	136	155	170
Min. Speed***, [RPM]		10	9	8	6	5
Weight, avg. [kg]	MV	31,8	32,6	33,5	34,9	36,5
	MVW	32,4	33,2	34,1	35,5	37,1
	MVS	22,7	23,5	24,4	25,6	27,7

\* Intermittent operation: the permissible values may occur for max. 10% of every minute.


\*\* Peak load: the permissible values may occur for max. 1% of every minute.

\*\*\* For speeds of 5 RPM lower than given, consult factory or your regional manager.


- 1) Intermittent speed and intermittent pressure must not occur simultaneously.
- 2) Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- 3) Recommend using a premium quality, anti-wear type mineral based hydraulic oil, HLP(DIN51524) or HM(ISO6743/4).  
If using synthetic fluids consult the factory for alternative seal materials.
- 4) Recommended minimum oil viscosity 13 mm<sup>2</sup>/s at 50°C.
- 5) Recommended maximum system operating temperature is 82°C.
- 6) To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

**FUNCTION DIAGRAMS**

**MV 315**

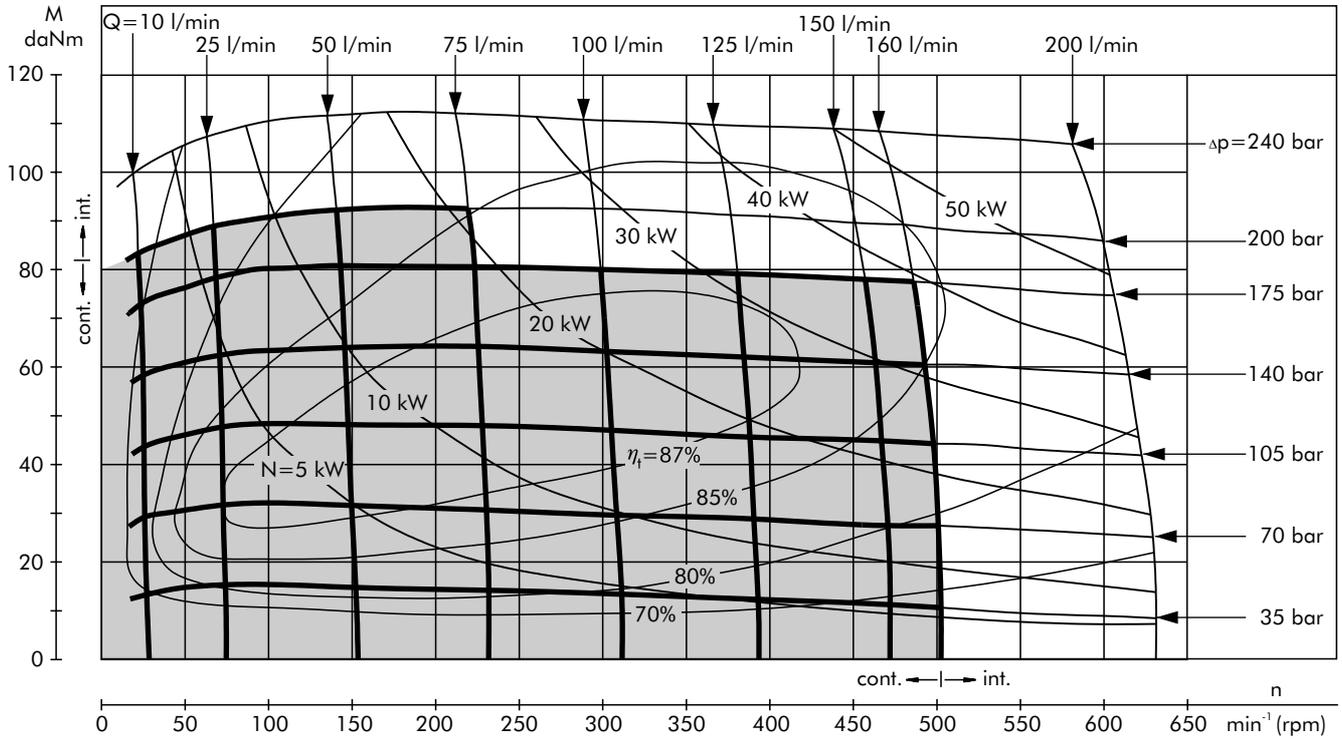


**MV 400**

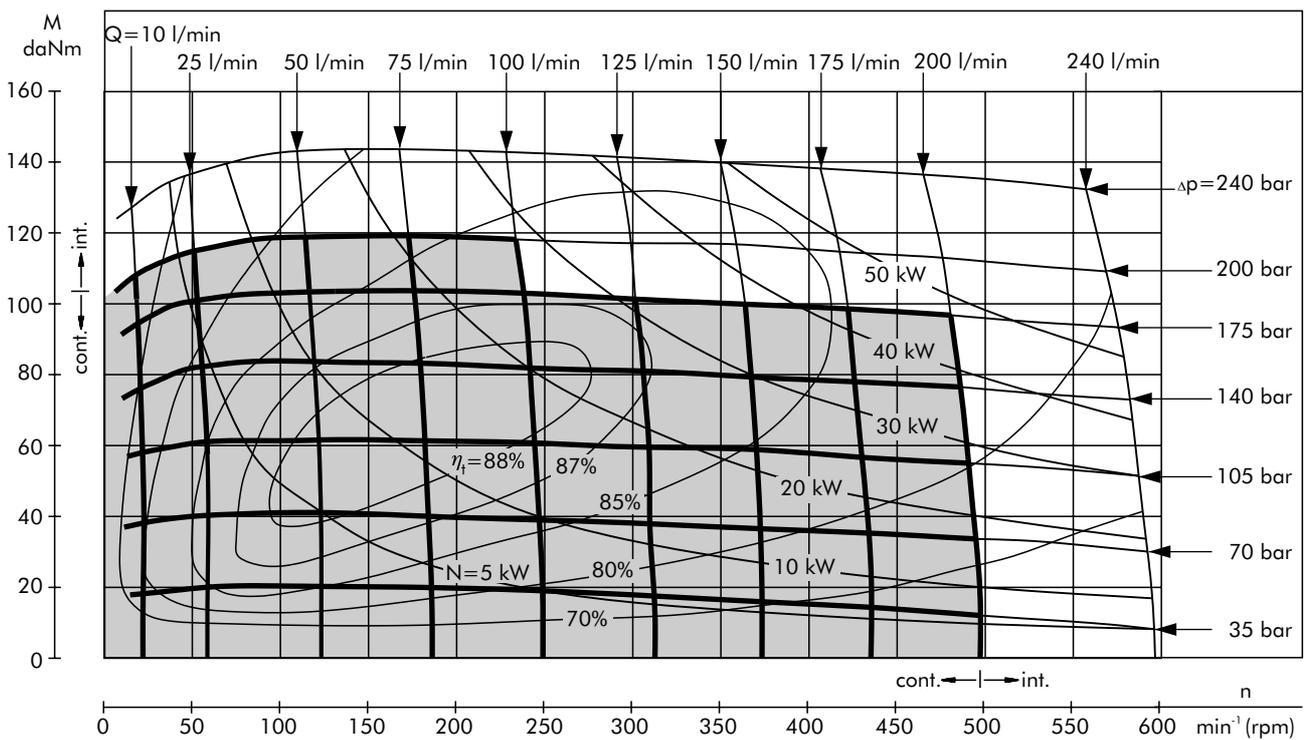


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .

## FUNCTION DIAGRAMS

### MV 500

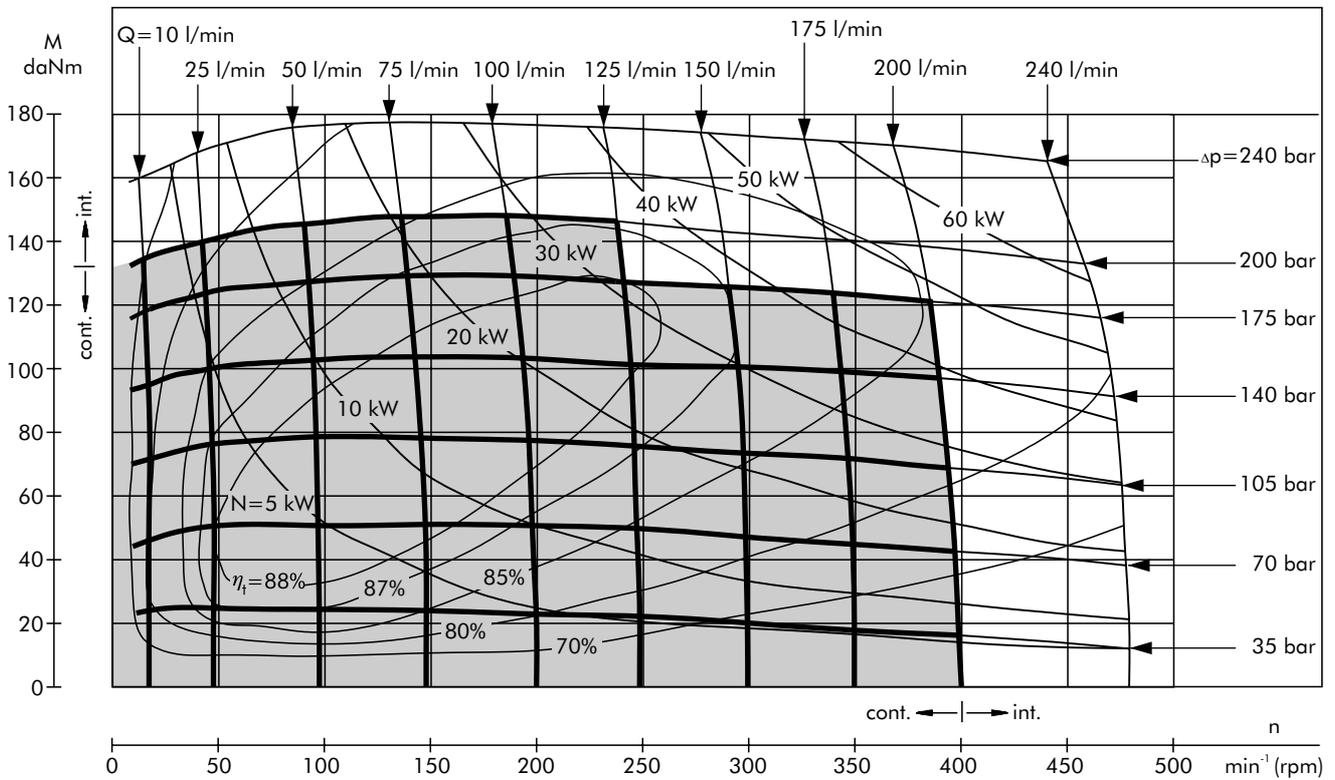


### MV 630

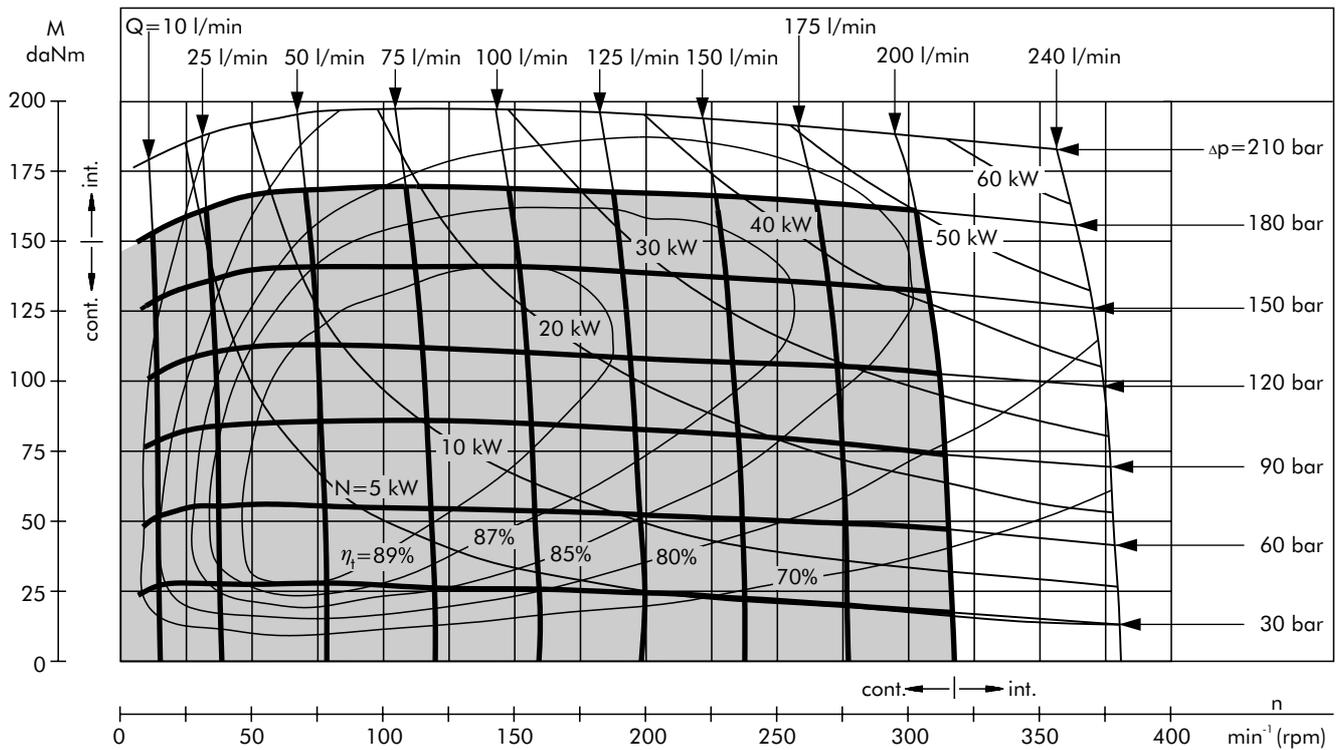

The function diagrams data was collected at back pressure 5 ÷ 10 bar and oil with viscosity of 32 mm<sup>2</sup>/s at 50° C.


**FUNCTION DIAGRAMS**

**MV 800**

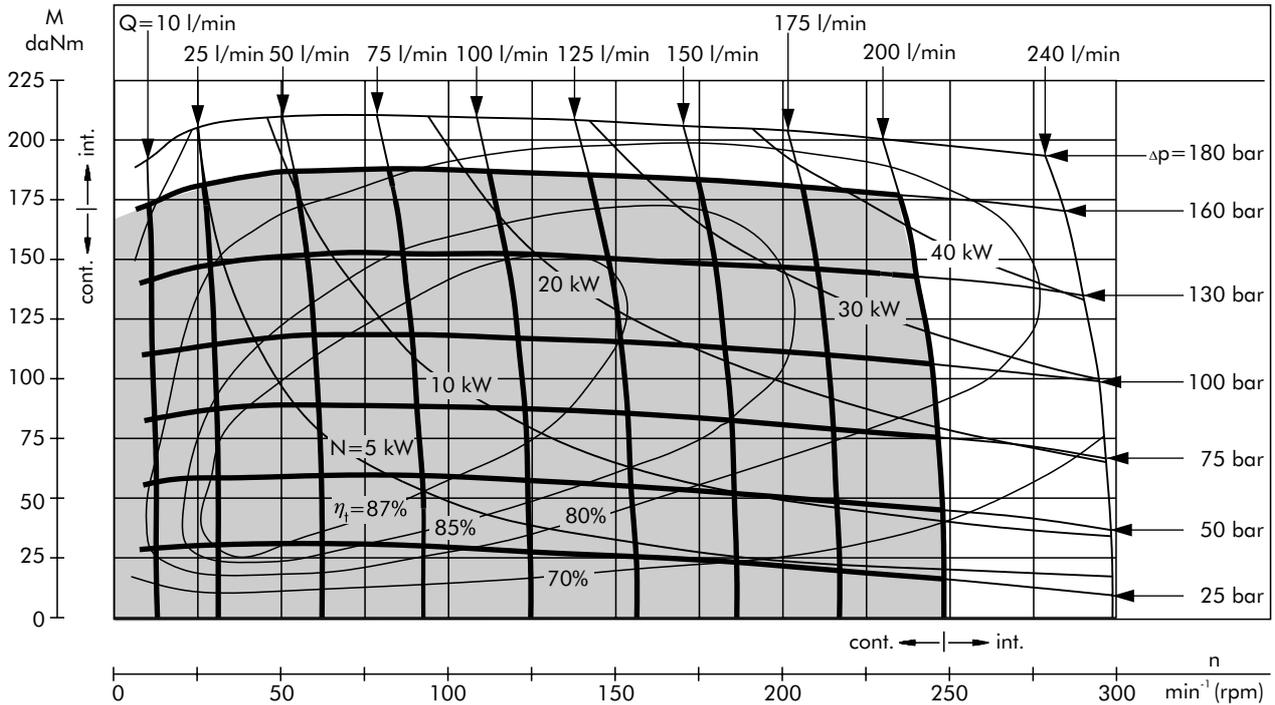


The function diagrams data was collected at back pressure  $5 \div 10$  bar and oil with viscosity of  $32 \text{ mm}^2/\text{s}$  at  $50^\circ \text{C}$ .


**PERMISSIBLE SHAFT LOADS**

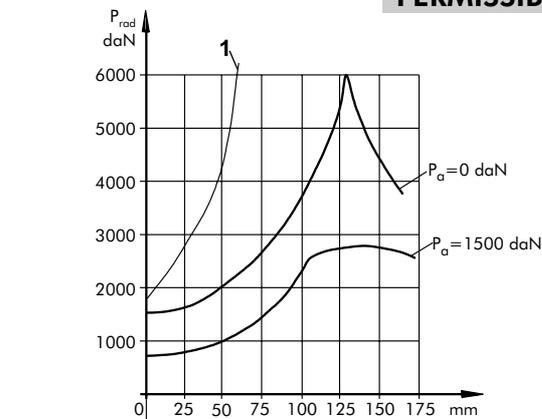

The output shaft runs in tapered bearings that permit high axial and radial forces. Curve "1" shows max. radial shaft load. Any shaft load exceeding the values quoted in the curve will seriously reduce motor life. The two other curves apply to a B10 bearing life of 3000 hours at 200 RPM.

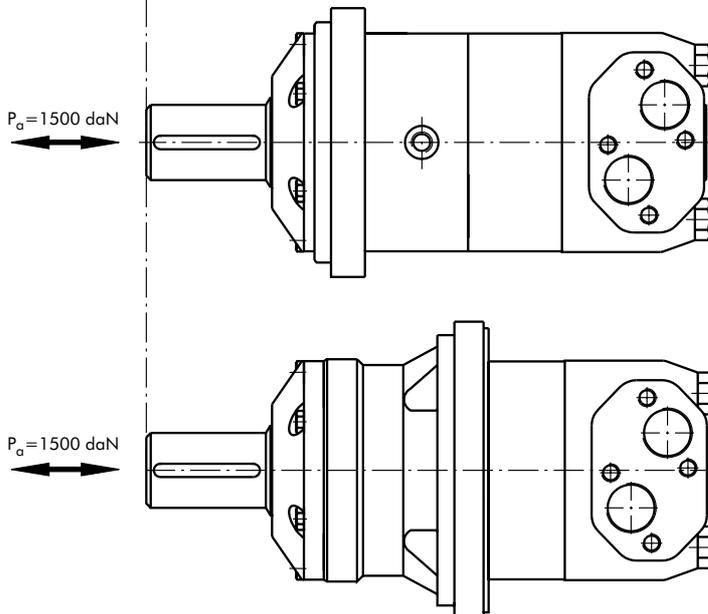


## DIMENSIONS AND MOUNTING DATA

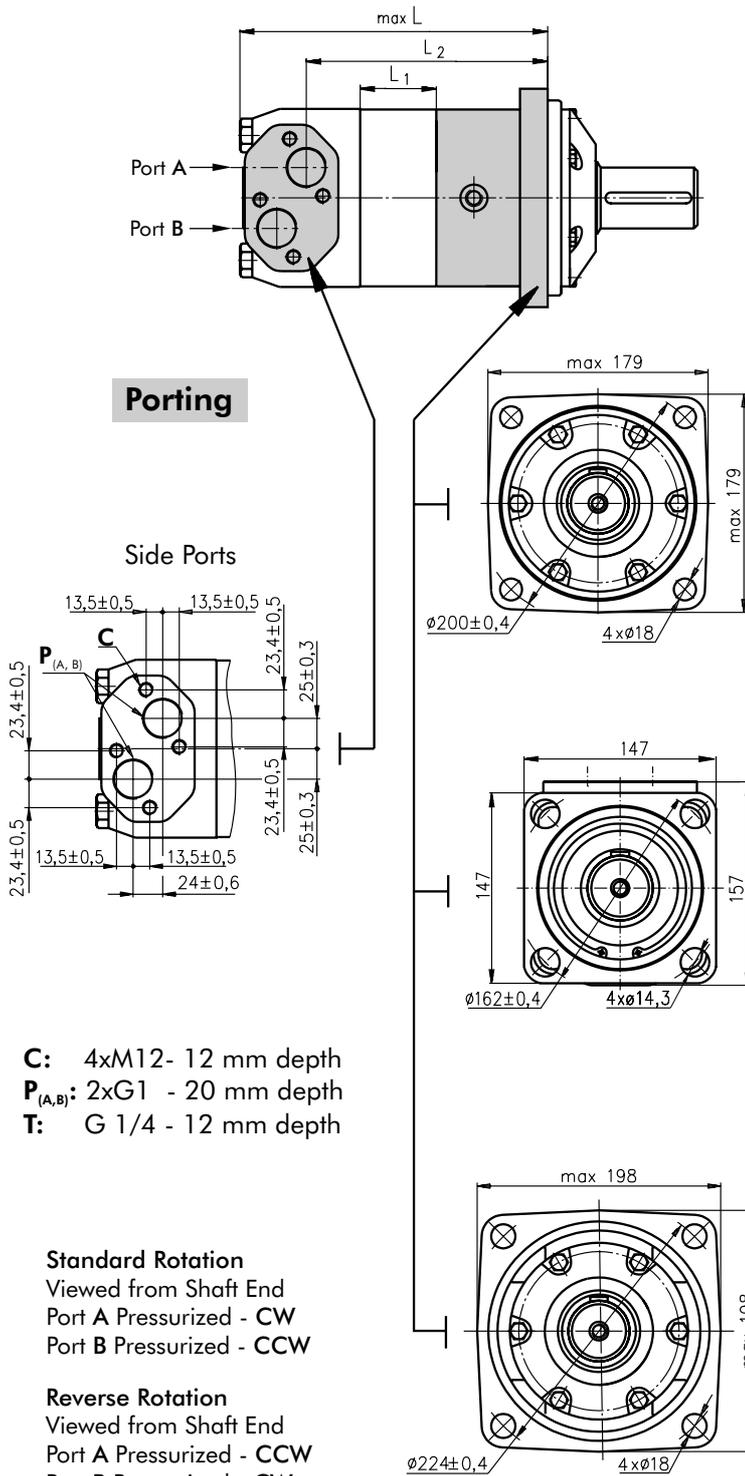


### Mounting


#### Square Mount (4 Holes)

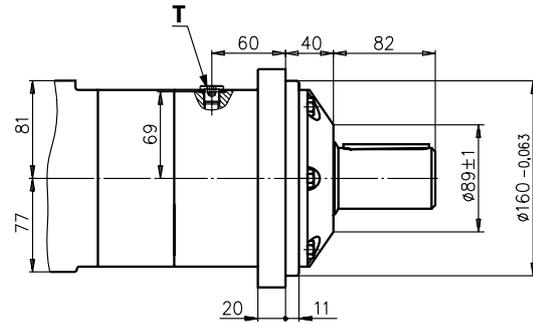

#### C SAE C Mount

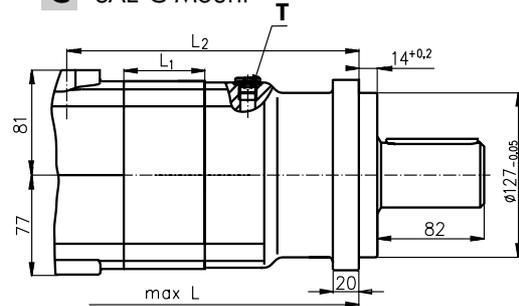

#### W Wheel Mount

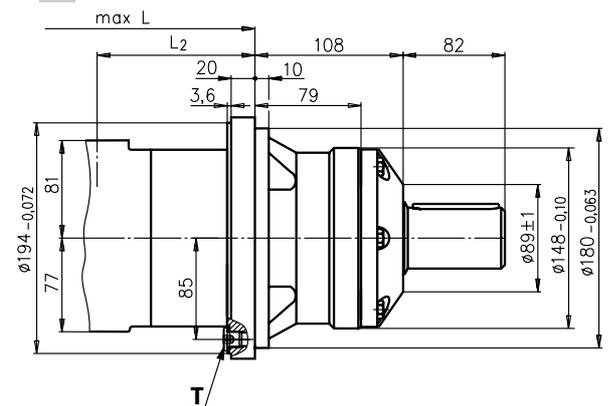




Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	L <sub>2</sub> , mm	Type	L, mm	L <sub>2</sub> , mm	*L <sub>1</sub> , mm
MV 315	214,5	160	MVC 315	238,25	184,26	MW 315	146	92	21,5
MV 400	221,5	167	MVC 400	245,25	191,26	MW 400	153	99	28,5
MV 500	229,5	175	MVC 500	253,25	199,26	MW 500	161	107	36,5
MV 630	240,0	186	MVC 630	263,75	209,76	MW 630	172	118	47,0
MV 800	254,0	200	MVC 800	277,75	223,76	MW 800	185	132	61,0

\* The width of the roll-gerotor is 4 mm greater than L<sub>1</sub>.



## DIMENSIONS AND MOUNTING

### V Very Short Mount

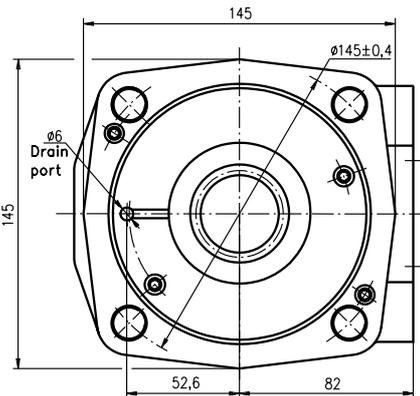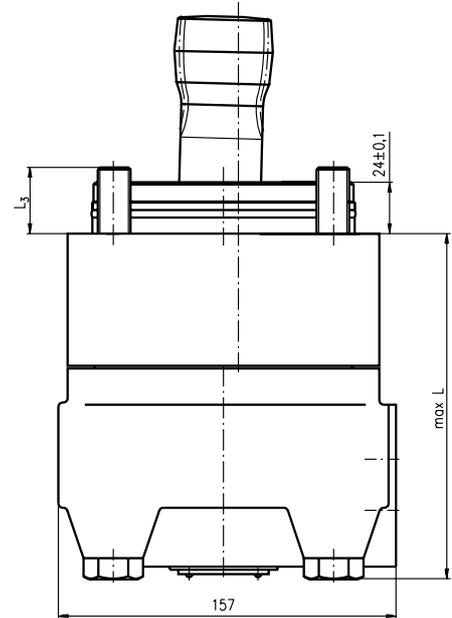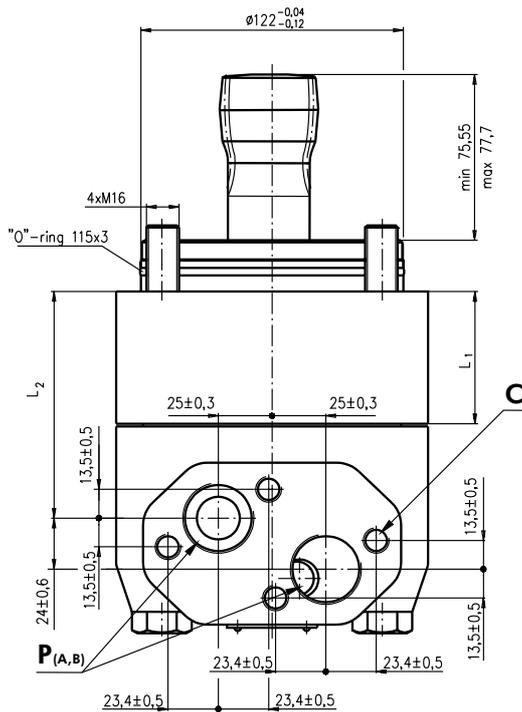

**C:** 4xM12- 12 mm depth

**P<sub>(A,B)</sub>:** 2xG1 - 20 mm depth

Type	L, mm	*L <sub>1</sub> , mm	L <sub>2</sub> , mm	L <sub>3</sub> , mm
MVV 315	121,5	22,0	68,0	29,5
MVV 400	128,5	29,0	75,0	32,5
MVV 500	136,5	37,0	83,0	34,5
MVV 630	147,0	47,5	93,0	34,0
MVV 800	161,0	61,5	107,5	30,0

#### Standard Rotation

Viewed from Shaft End

Port A Pressurized - CW

Port B Pressurized - CCW

#### Reverse Rotation

Viewed from Shaft End



Port A Pressurized - CCW

Port B Pressurized - CW

\* The width of the roll-gerotor is 4 mm greater than L<sub>1</sub>.

## DIMENSIONS OF THE ATTACHED COMPONENT

### MVV

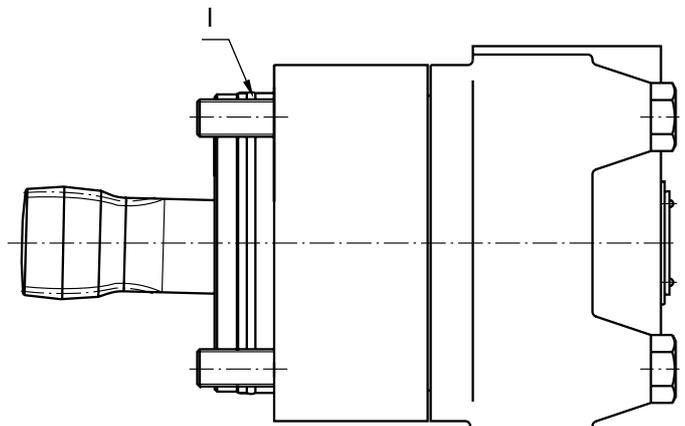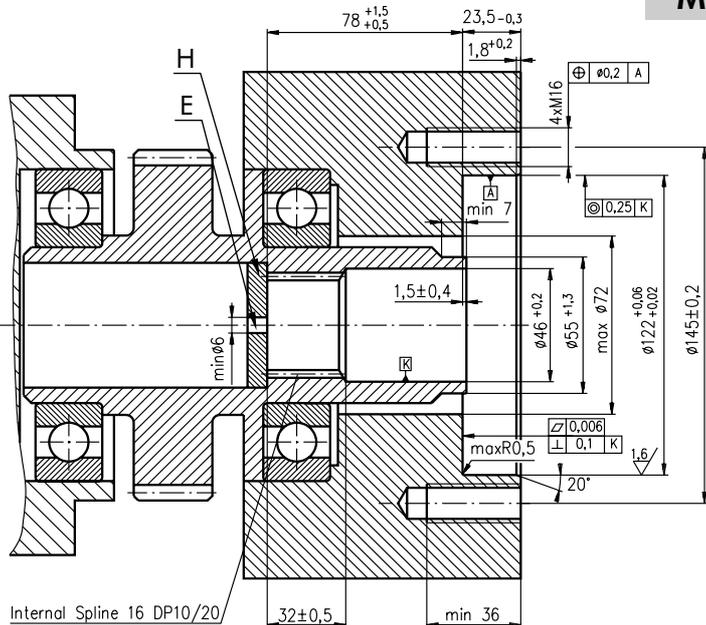

**E:** External drain channel

**H:** Hardened stop plate

**I:** O- Ring 115x3mm

Internal Spline 16 DP10/20  
ANS B92.1-1976, cl.5

## DRAIN CONNECTION

A drain line ought to be used when pressure in the return line can exceed the permissible pressure. It can be connected:


- For MVS at the drain port of the motor;
- For MVV at the drain connection of the attached component. The maximum pressure in the drain line is limited by the attached component and its shaft seal.

The drain line must be possible for oil to flow freely between motor and attached component and must be led to the tank. The maximum pressure in the drain line is limited by the attached component and its seal.

## INTERNAL SPLINE DATA FOR THE ATTACHED COMPONENT


Standard ANSI B92.1-1976, class 5  
[ $m=2.54$ ; corrected  $x.m=+1,0$ ]

Fillet Root Side Fit		mm
Number of Teeth	z	16
Diametral Pitch	DP	10/20
Pressure Angle		30°
Pitch Dia.	D	40,640
Major Dia.	D <sub>ri</sub>	45,2 <sup>+0,4</sup>
Minor Dia.	D <sub>i</sub>	38,5 <sup>+0,039</sup>
Space Width [Circular]	Lo	5,18±0,037
Fillet Radius	R	0,4
Max. Measurement between Pin	L	32,47 <sup>+0,15</sup>
Pin Dia.	d	5,5±0,001

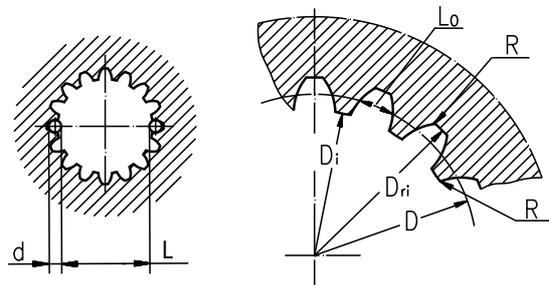


*Hardening Specification:*  
 HV=750±50 on the surface  
 HV=560 at 0,7±0,2 mm case depth  
 Material 20 MoCr4 EN 10084 or better

## MOTOR WITH TACHO CONNECTION

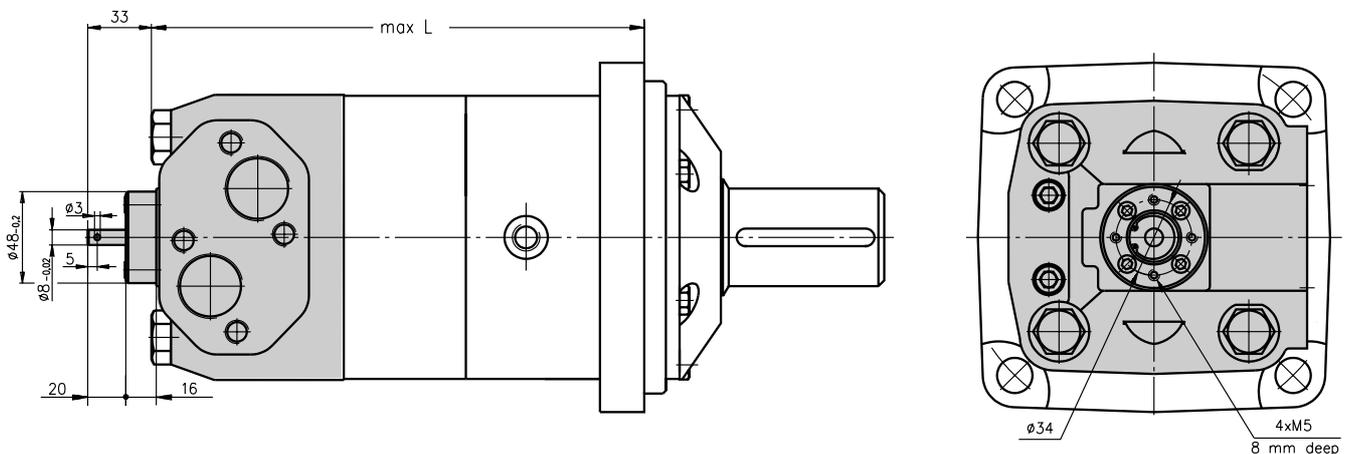


## SHAFT EXTENSIONS


**C** -  $\varnothing 50$  straight, Parallel key A14x9x70 DIN 6885

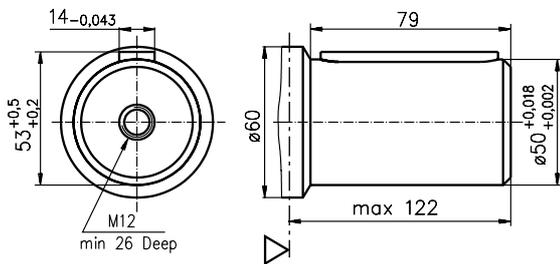


**CO** -  $\varnothing 2\frac{1}{4}$  [57,15] straight, Parallel key  $\frac{1}{2}$ "x $\frac{1}{2}$ "x  $2\frac{1}{4}$ " BS46

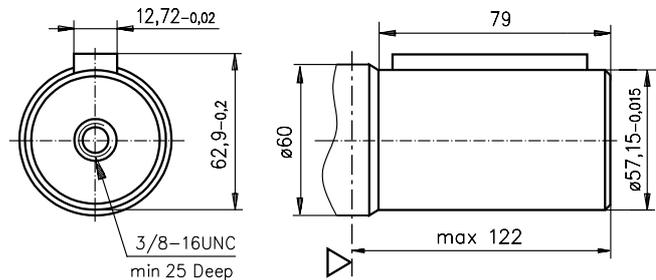

**SH** -  $\varnothing 2\frac{1}{8}$ " splined, 16 DP 8/16 ANSI B92.1-1976

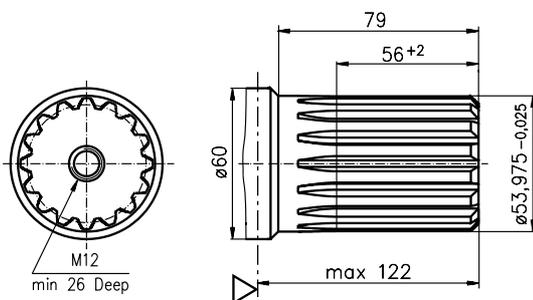

**K** - tapered 1:10, Parallel key B16x10x32 DIN 6885

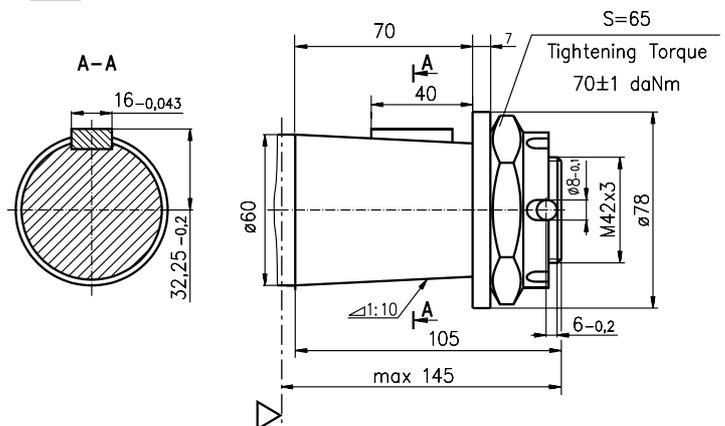

▽ - Motor Mounting Surface

## ORDER CODE

	1	2	3	4	5
<b>M V</b>					

### Pos. 1 - Mounting Flange

omit - Square mount, four holes

**C** - SAE C mount

**W** - Wheel mount

**S** - Short mount

**V** - Very short mount

### Pos. 2 - Displacement code

**315** - 314,5 [cm<sup>3</sup>/rev]

**400** - 400,9 [cm<sup>3</sup>/rev]

**500** - 499,6 [cm<sup>3</sup>/rev]

**630** - 629,1 [cm<sup>3</sup>/rev]

**800** - 801,8 [cm<sup>3</sup>/rev]

### Pos. 3 - Shaft extensions\*

omit - for **S** and **V** mounting flange

**C** -  $\varnothing 50$  straight, Parallel key A14x9x70 DIN6885

**CO** -  $\varnothing 2\frac{1}{4}$ " straight, Parallel key  $\frac{1}{2}$ "x $\frac{1}{2}$ "x  $2\frac{1}{4}$ " BS46

**SH** -  $\varnothing 2\frac{1}{8}$ " splined, ANSI B92.1-1976

**K** -  $\varnothing 60$  tapered 1:10, Parallel key B16x10x32 DIN6885

### Pos. 4 - Special Features (see page 53)

### Pos. 5 - Design Series

omit - Factory specified

## NOTES:

\* The permissible output torque for shafts must not be exceeded!

The hydraulic motors are mangano- phosphatized as standard.

# MOTOR SPECIAL FEATURES

---

Special Feature Description	Order Code	Motor type			
		MS	MSY	MT	MV
Motor for Speed Sensor*	<b>RS</b>	○	○	○	○
Tacho Connection**	<b>T</b>	○	○	○	○
Low Leakage	<b>LL</b>	○	○	○	○
Low Speed Valving	<b>LSV</b>	○	○	○	○
Reverse Rotation	<b>R</b>	○	○	○	○
Paint***	<b>P</b>	○	○	○	○
Corrosion Protected Paint***	<b>PC</b>	○	○	○	○
Check Valves		S	S	S	S

- Optional
- S Standard


\* for sensor ordering see pages 54-55.

\*\* only for side ports.


\*\*\* color at customer's request.

# MOTORS WITH SPEED SENSOR


## MS(Y)...RS

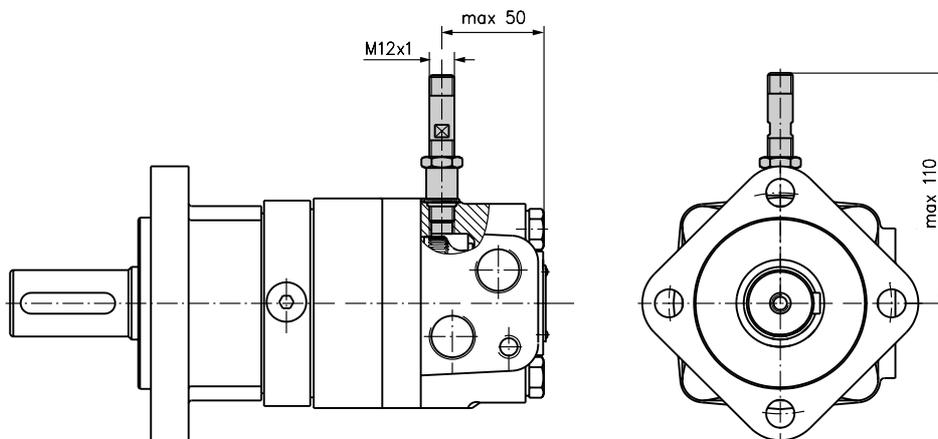

## MT...RS

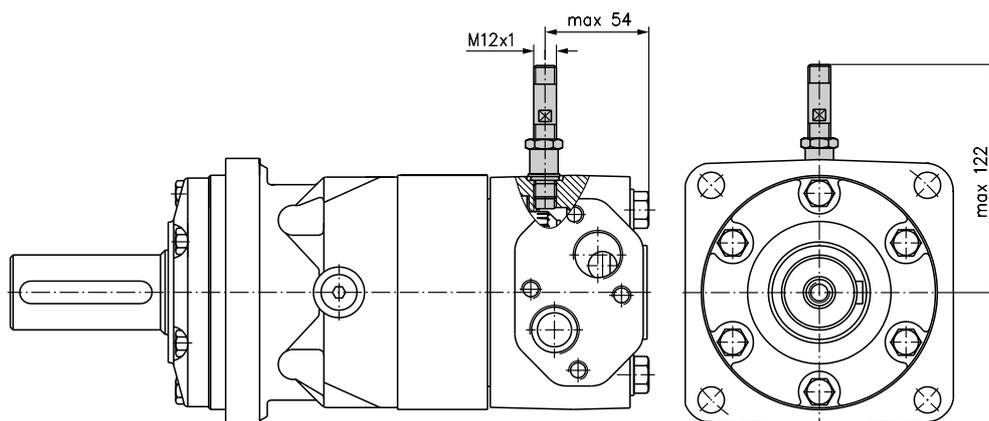

## MV...RS

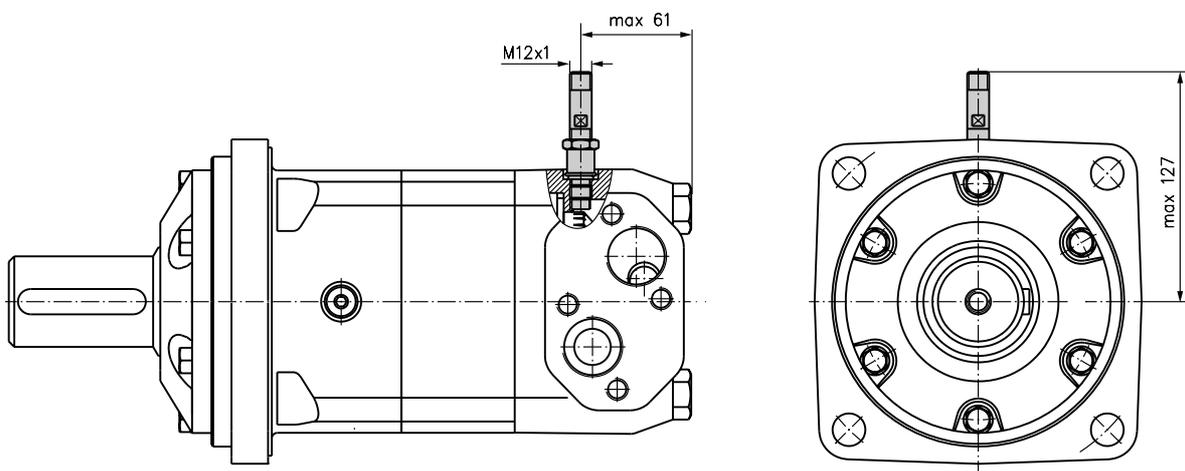


**TECHNICAL DATA OF THE SPEED SENSOR**

**Technical data**

Frequency range	3...20 000 Hz
Output	PNP, NPN
Power supply	10...36 VDC
Current input	20 mA (@24 VDC)
Current load	500 mA (@24 VDC; 24°C)
Ambient Temperature	minus 40... plus 125°C
Protection	IP 67
Plug connector	M12-Series
Mounting principle	ISO 6149

**Output signal**

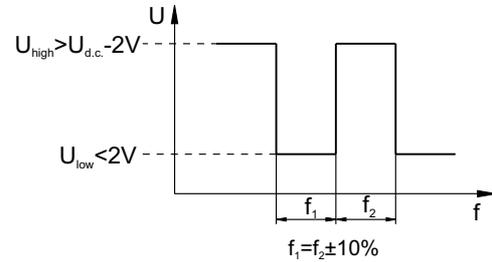


Load max.:  $I_{high} = I_{low} < 50\text{mA}$

No load current, max: 20 mA


Motor type	MS	MT	MV
Pulses per revolution	54	84	102

**Wiring diagrams**

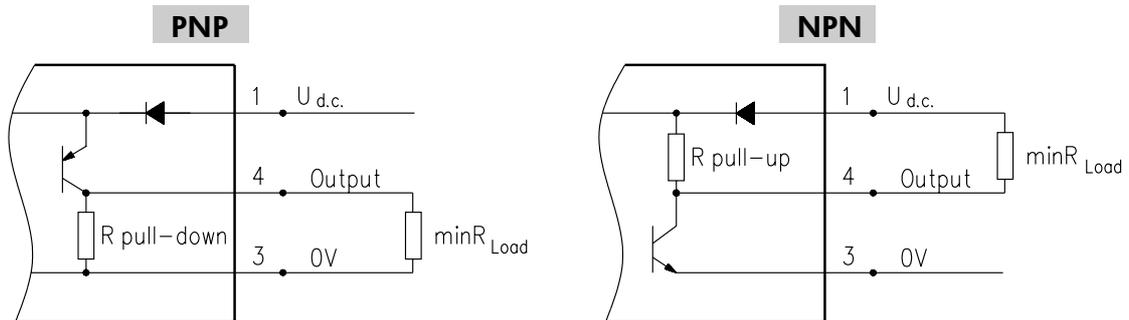

$$R_{Load} = U_{d.c.} / I_{max} (=50\text{mA})$$

**Stick type**



Terminal No.	Connection	Cable Output
1	$U_{d.c.}$	Brown
2	No connection	White
3	0V	Blue
4	Output signal	Black

**Order Code for Speed Sensor**

Sensor Code	Output type	Electric connection
<b>RSN</b>	NPN	Connector BINDER 713 series
<b>RSP</b>	PNP	Connector BINDER 713 series
<b>RSNL5</b>	NPN	Cable output 3x0,25; 5m long
<b>RSPL5</b>	PNP	Cable output 3x0,25; 5m long

**NOTE:** \*- The speed sensor is not fitted at the factory, but is supplied in a plastic bag with the motor. For installation see enclosed instructions.

## MOTOR APPLICATION

### VEHICLE DRIVE CALCULATIONS

1. Motor speed:  $n$ , [ $\text{min}^{-1}$ ]

$$n = \frac{2,65 \times v \times i}{R}$$

$v$ - vehicle speed, [ $\text{km/h}$ ];

$R$ - wheel rolling radius, [ $\text{m}$ ];

$i$ - gear ratio between motor and wheels.

If no gearbox, use  $i = 1$ .

2. Rolling resistance:  $RR$ , [ $\text{daN}$ ]

The resistance force resulted in wheels contact with different surfaces:

$$RR = G \times \rho$$

$G$ - total weight loaded on vehicle, [ $\text{daN}$ ];

$\rho$ - rolling resistance coefficient (Table 1).

Table 1

Rolling resistance coefficient In case of rubber tire rolling on different surfaces	
Surface	$\rho$
Concrete- faultless	0,010
Concrete- good	0,015
Concrete- bad	0,020
Asphalt- faultless	0,012
Asphalt- good	0,017
Asphalt- bad	0,022
Macadam- faultless	0,015
Macadam- good	0,022
Macadam- bad	0,037
Snow- 5 cm	0,025
Snow- 10 cm	0,037
Polluted covering- smooth	0,025
Polluted covering- sandy	0,040
Mud	$0,037 \div 0,150$
Sand- Gravel	$0,060 \div 0,150$
Sand- loose	$0,160 \div 0,300$

3. Grade resistance:  $GR$ , [ $\text{daN}$ ]

$$GR = G \times (\sin \alpha + \rho \times \cos \alpha)$$

$\alpha$ - gradient negotiation angle (Table 2)

Table 2

Grade %	$\alpha$ Degrees	Grade %	$\alpha$ Degrees
1%	$0^\circ 35'$	12%	$6^\circ 5'$
2%	$1^\circ 9'$	15%	$8^\circ 31'$
5%	$2^\circ 51'$	20%	$11^\circ 19'$
6%	$3^\circ 26'$	25%	$14^\circ 3'$
8%	$4^\circ 35'$	32%	$18^\circ$
10%	$5^\circ 43'$	60%	$31^\circ$

4. Accelerate force:  $FA$ , [ $\text{daN}$ ]

Force  $FA$  necessary for acceleration from 0 to maximum speed  $v$  and time  $t$  can be calculated with a formula:

$$FA = \frac{v \times G}{3,6 \times t}, [\text{daN}]$$

$FA$ - accelerate force, [ $\text{daN}$ ];

$t$ - time, [ $\text{s}$ ].

5. Tractive effort:  $DP$ , [ $\text{daN}$ ]

Tractive effort  $DP$  is the additional force of trailer. This value will be established as follows:

-acc.to constructor's assessment;

-as calculating forces in items 2, 3 and 4 of trailer; the calculated sum corresponds to the tractive effort requested.

6. Total tractive effort:  $TE$ , [ $\text{daN}$ ]

Total tractive effort  $TE$  is total effort necessary for vehicle motion; that the sum of forces calculated in items from 2 to 5 and increased with 10 % because of air resistance.

$$TE = 1,1 \times (RR + GR + FA + DP)$$

$RR$ - force acquired to overcome the rolling resistance;

$GR$ - force acquired to slope upwards;

$FA$ - force acquired to accelerate (acceleration force);

$DP$ - additional tractive effort (trailer).

7. Motor Torque:  $M$ , [ $\text{daNm}$ ]

Necessary torque moment for every hydraulic motor:

$$M = \frac{TE \times R}{N \times i \times \eta_M}$$

$N$ - motor numbers;

$\eta_M$ - mechanical gear efficiency (if it is available).

8. Cohesion between tire and road covering:  $M_w$ , [ $\text{daNm}$ ]

$$M_w = \frac{G_w \times f \times R}{i \times \eta_M}$$

To avoid wheel slipping, it should be observed the following condition  $M_w > M$

$f$  - frictional factor;

$G_w$ - total weight over the wheels, [ $\text{daN}$ ].

Table 3

Surface	Frictional factor $f$
Steel on steel	$0,15 \div 0,20$
Rubber tire on polluted surface	$0,5 \div 0,7$
Rubber tire on asphalt	$0,8 \div 1,0$
Rubber tire on concrete	$0,8 \div 1,0$
Rubber tire on grass	0,4


**9.Radial motor loading:  $P_{rad}$ , [daN]**

When motor is used for vehicle motion with wheels mounted directly on motor shaft, the total radial loading of motor shaft  $P_{rad}$  is a sum of motion force and weight force acting on one wheel.

$G_w$  - Weight held by wheel;

$P_{rad}$  - Total radial loading of motor shaft;

$M/R$ - Motion force.



$$P_{rad} = \sqrt{G_w^2 + \left(\frac{M}{R}\right)^2}$$

In accordance with calculated loadings the suitable motor from the catalogue is selected.

**DRAINAGE SPACE AND DRAINAGE PRESSURE**

Advantages in oil drainage from drain space: Cleaning; Cooling and Seal lifetime prolonging.

