

Loading Dock



- | Widely used for warehouse and factory operations
- | Especially designed for palletized loads transported by manual pallet trucks or powered pallet trucks
- | Moving heavy equipment either onto or off a vehicle in a level mode



STANDARD FEATURES

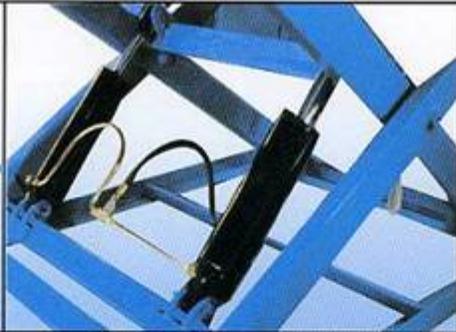
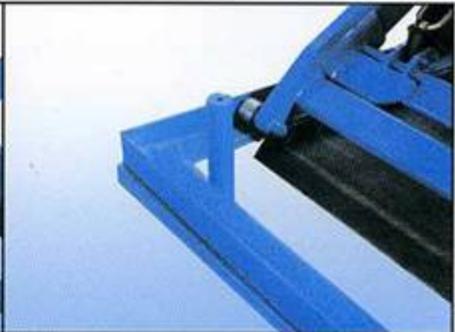
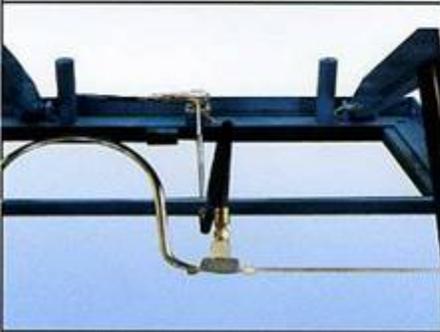
- I Heavy-duty platform, Made in welded resistant construction, The surface is made of nonskid tread plate, Braced with binding beams
- I Strong scissors, One piece construction scissor legs
- I High-grade Hydraulic Cylinders, The piston rods are grinded and hard-chromium plated
- I Compact power-control unit, The first level quality hydraulic power unit, All electric components in one cabin
- I Simple Hand Controller, Operated by a hand-pushbutton for “Raise/Lower”, Any positions can be stopped when the button releases
- I Safety design, Water proof and 24 voltage hand-control unit, Lifting limited switch, Anti-explosion valve in case hydraulic pipe is broken

OPTIONAL FEATURES

- I Capacity 1 ton to 6 tons are available
- I Special platform size & special lifting height are available
- I Special input voltage are available
- I More than one scissor are available

SPECIFICATION

Scissor no.	Model	Capacity(kg)	Platform Size L(mm)*W(mm)	Lowered Height (mm)	Travel (mm)	Raised Height (mm)	Motor(kw)	Weight (kg)
I	LD20-2515	2000	2500x1500	350	1600	1950	4	1200
	LD20-2520	2000	2500x2000	350	1600	1950	4	1400
	LD25-2515	2500	2500x1500	350	1600	1950	4	1400
	LD25-2520	2500	2500x2000	350	1600	1950	4	1500
	LD30-2515	3000	2500x1500	350	1600	1950	4	1400
	LD30-2520	3000	2500x2000	350	1600	1950	4	1500
	LD40-3020	4000	3000x2000	600	1650	2250	4	2450
	LD40-3520	4000	3500x2000	600	1800	2400	4	2680
	LD50-3020	5000	3000x2000	600	1650	2250	4	2450
	LD50-3520	5000	3500x2000	600	1800	2400	4	2680
II	LD60-3020	6000	3000x2000	600	1650	2250	4	2450
	LD60-3520	6000	3500x2000	600	1800	2400	4	2680
III	LD10-3019	1000	3000x1900	850	3600	4450	4	2500
	LD45-4020	4500	4000x2000	800	4500	5300	5.5	2800
III	LD25-3020	2500	3000x2000	1080	4530	5610	4	2600
IV	LD18-2518	1800	2500x1800	1200	6000	7200	4	2200

		
<p>Full Set With Guardrail</p>	<p>Contoured Scissor Legs</p>	<p>Hinged Safety Maintenance Bar</p>
		
<p>Anti Explosion Valve</p>	<p>Compact Power-control Unit</p>	<p>Simple Hand Controller</p>

*special requirements can be customized.